



Installation Manual

1. Loosen the screw and Open back cover.




2. Loosen the bracket arm screws and wire clamp.



25 Nm
15 Nm
6 Nm


3. Insert the fitting into the arm.

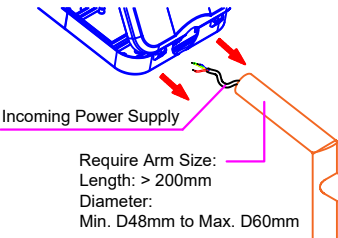

Incoming Power Supply


Require Arm Size:
Length: > 200mm
Diameter:
Min. D48mm to Max. D60mm

4. Tighten the bracket arm screws to secure the fitting.

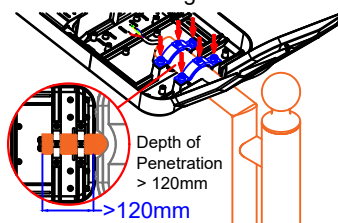

Depth of Penetration > 120mm


5. Use an IP65 waterproof connector to connect the incoming power, or seal it with waterproof tape.

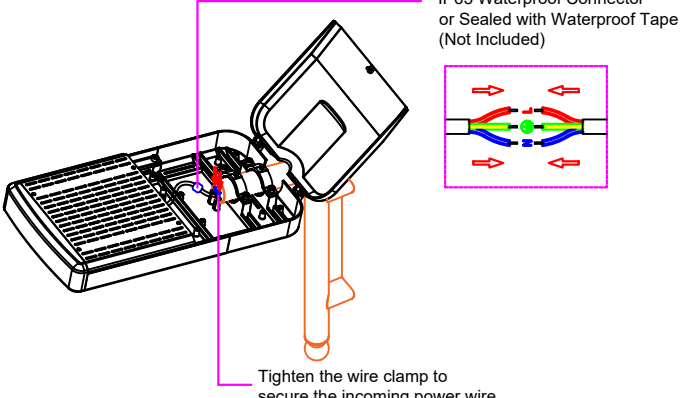


IP65 Waterproof Connector or Sealed with Waterproof Tape (Not Included)

Tighten the wire clamp to secure the incoming power wire


6. Close the back cover.

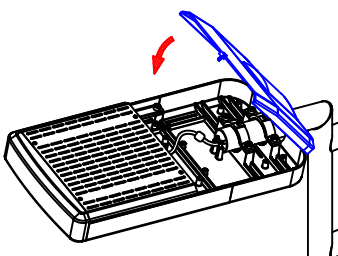

7. Tighten the screws.

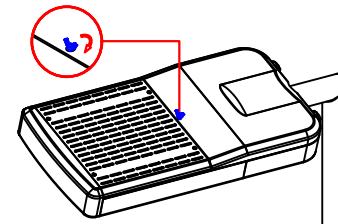


Operation Position

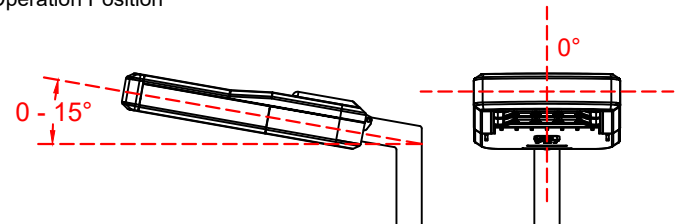

0-15°
0°

Done.

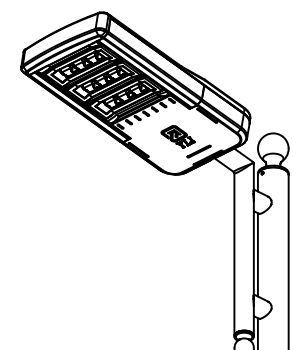



Warning

1. This product should be installed by a full certified electrician in accordance with local building and electrical codes.
2. Due to risk of electric shock, ensure that the main power source and circuit breakers are switched before performing any installation or wiring procedures.
3. Failure to properly support the fixture during installation may cause damage or injury, for which the manufacturer is not responsible. Ensure the light bracket bolt is securely mounted and will support the weight of the fixture.
4. Instruction for type Y attachment : "If the external flexible cable or cord of this luminaire is damage, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard".
5. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Caution

The Luminaire must be used within the applicable product specifications, installation instructions and environmental conditions for storage & operations according to application guidelines provided by YLI for product Warranty to be valid.

Areas of Application:

Outdoor, Street, Parks, Garden Backyard, Public & Commercial Building

Uncontrolled Copy if Printed

Notes:

Δ				
Δ				
Δ				
Δ				
Δ				
No	Date	Revision Description	Issues by	ECN No.

Designed by	-
Draw by	B.H. AW
Check By	T.P. LEE
Approved By	T.P. LEE

Unit	Millimeter
Scale	N/A
Tolerance	N/A


Model	YOS SL Series		
Description	Installation Manual		
Part No.	-		
Client	-	Weight	-
Material	-	Date	06/06/2025
Finishing	-	Sheet	2 / 2


YLI
Ultimate Lighting Experience

YLI INDUSTRY SDN. BHD. (504654-U)
PT. 14025 & 14026
PERSARUAN BATU GAJAH PERDANA 6,
TAMAN BATU GAJAH PERDANA,
31550 PUSING, PERAK, MALAYSIA.


© Copyright
This drawing was the property of
YLI Industry Sdn. Bhd.
It should not be copied without permission.

Installation Manual


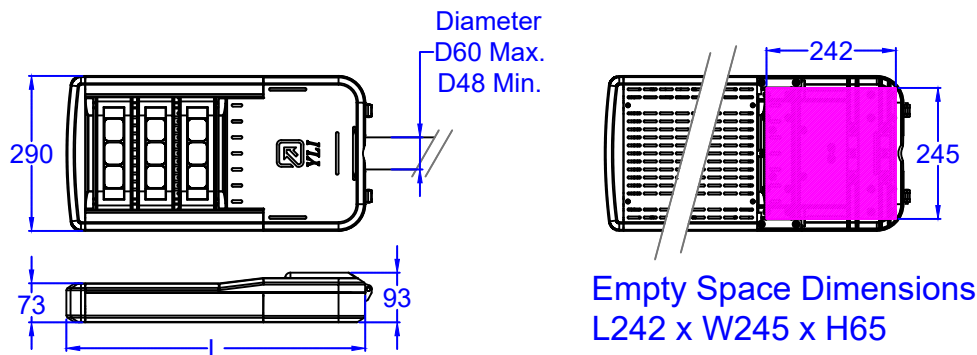


Model	Dimension (mm) (L)	Weight (KG)
YOS SL-1	403	4.8
YOS SL-2	481	5.5
YOS SL-3	559	6.4
YOS SL-4	637	7.3
YOS SL-5	715	8.1

Mounting Height Maximum : 10 Meter

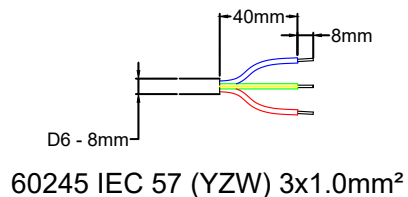

Maximum Projected Area:
299m² (W23m x L13m)

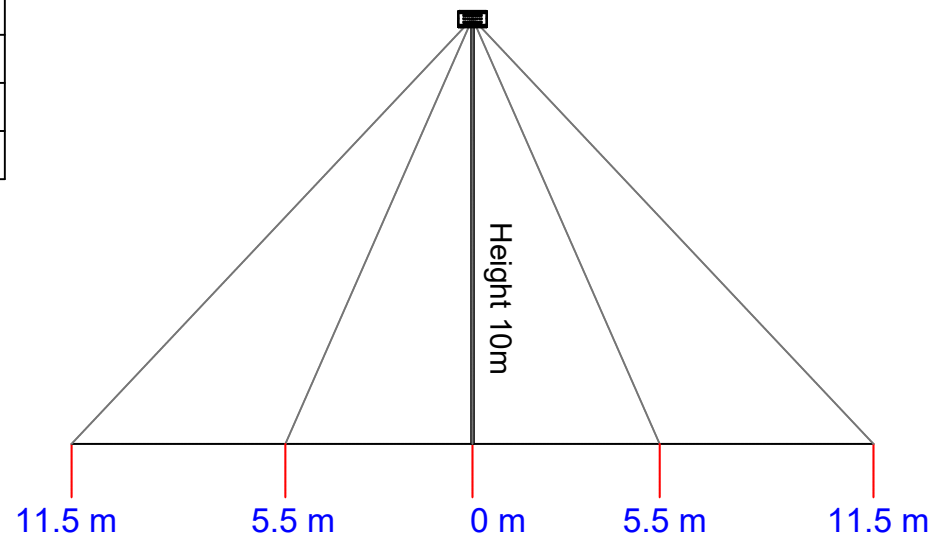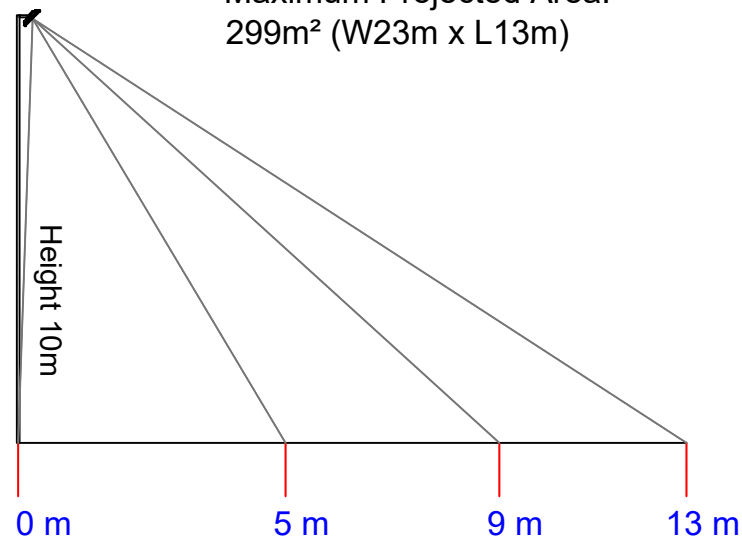

Uncontrolled Copy if Printed

Notes:

Δ				
Δ				
Δ				
Δ				
Δ				
No	Date	Revision Description	Issues by	ECN No.

Designed by	-
Draw by	B.H. AW
Check By	T.P. LEE
Approved By	T.P. LEE

Unit	Millimeter
Scale	N/A
Tolerance	N/A

Model	YOS SL Series		
Description	Installation Manual		
Part No.	-		
Client	-	Weight	-
Material	-	Date	06/06/2025
Finishing	-	Sheet	1 / 2