


LED Lawn Light
Model: OS SL-1102 (GU10)

Specifications & Technical Data

- Die Cast Aluminium Rim & Housing
- Anodized Aluminium Reflector
- Tempered Glass **Dot-Frosted** Diffuser
- Adjustable Lamp Position
- Ceramic Lampholder (GU10)
- Stainless Steel Screws
- Sealed With Silicone Gasket
- Waterproof Cable Entry
- Pre-Looping With Textile Silicone Cable
- Electrostatically Polyester Powder Coated
- Degree of Protection: **IP65**
- Type of Protection: Class 1
- Mounting Method: Surface Ground Mounted

Available Colour:

Black Texture or Silver Texture

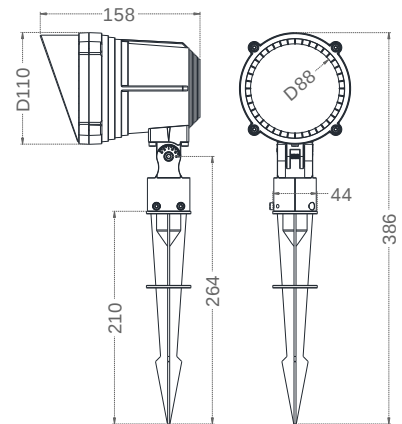

Model	Luminaires						Dimension	Current (A)	P.F. (λ)
	Rim	Housing	Tempered Glass Diffuser	Lamp	Base	AC Input	(mm)	± 5 %	>
OS SL-1102	DCA	DCA	Dot-Frosted	1 x 5W	GU10	220-240V, 50/60Hz	As Shown	0.04	> 0.50
				1 x 7.5W	GU10	220-240V, 50/60Hz	As Shown	0.06	> 0.50

Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED GU10 5W 3000K 36D (RLDM02K05304U1EX1)	450lm	610cd	5W	3000K	≥ 90	≤ 6	36°	GU10	0.04	> 0.5	170-240V, 50/60Hz	15000Hrs
TOSHIBA	LED GU10 7.5W 3000K 60D (RLDM02K08306U1EX1)	640lm	740cd	7.5W	3000K	≥ 90	≤ 6	60°	GU10	0.06	> 0.5	170-240V, 50/60Hz	15000Hrs

Date: 30 August 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.