

OASIS SL-1100 SERIES ADJUSTABLE LED LAWN LIGHT
MODEL: OS SL-1103


Black Texture



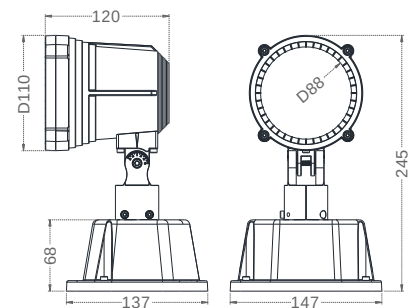
Silver Texture

Specifications & Technical Data
Luminaires:

- Die Cast Aluminium Rim & Housing
- Electrostatically Polyester Powder Coated
- Tempered Glass **Dot-Frosted** Diffuser
- Adjustable Lamp Position
- Built-In Gear Chamber
- Nylon Connecting Devices
- Waterproof Cable Entry
- Stainless Steel Screws
- Surface Ground or Wall Mounted

Areas of Application:

Outdoor, Park, Garden,
Public & Commercial Building

Replace:
1x20W HID Reflector Lamp
1x50W Halogen MR16


Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	OS50 LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.50)
OS SL-1103	750lm	8W	0.06A	24° 40°	OS50-900-8xx-xxD	VLD 10/250/40
	1000lm	11W	0.08A	24° 40°	OS50-900-8xx-xxD	VLD 15/350/43

OS50 LED Module	Current (mA)	Luminous Flux (lm)	Candela (cd)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	Beam Angle (°)	SDCM	Lifespan (Hrs)
OS50-900-8xx-24D	250mA	900lm	2400cd	6.7W	25V	3000K 4000K 6000K	≥ 80	24	≤ 5	30000Hrs
OS50-900-8xx-40D	250mA	900lm	1200cd	6.7W	25V	3000K 4000K 6000K	≥ 80	40	≤ 5	30000Hrs
OS50-900-8xx-24D	350mA	1150lm	3100cd	9.3W	26V	3000K 4000K 6000K	≥ 80	24	≤ 5	30000Hrs
OS50-900-8xx-40D	350mA	1150lm	1500cd	9.3W	26V	3000K 4000K 6000K	≥ 80	40	≤ 5	30000Hrs

Date: 30 August 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.