

LED Surface Wall Light
Model: OS WL 360/S-RD


Black Texture

Silver Texture
Specifications & Technical Data


- Base is Die Casted From Aluminium Alloy
- Acrylic **Opal** Diffuser
- Electrostatic Polyester Powder Coated
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Stainless Steel Screws
- Sealed With Silicone Gasket
- Degree of Protection: **IP65**
- Type of Protection: Class 1
- Mounting Method: Surface Wall Mounted

Available Colour:

Black Texture or Silver Texture

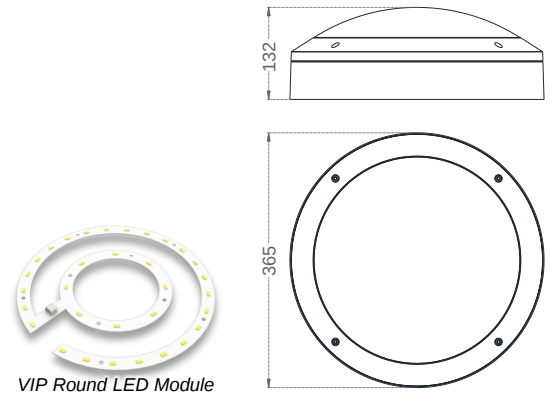

Model	Luminaires					VIP Round LED Modules (DC)	VIP LED Driver (AC 220-240V, PF 0.90)	Dimension	Current (A)	P.F. (λ)
	Housing	Diffuser	System Lumens (lm)	Power (W)	CCT (K)			(mm)	± 5 %	>
OS WL 360/S-RD	DCA	Opal	1000lm	24W	3000K / 4000K / 6000K	VIP Round LED 24W/xxxxK	VIP LED Driver 16-24W/300mA	As Shown	0.10	> 0.90

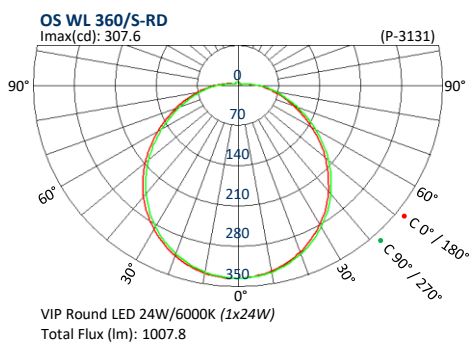Photometric Data


Flux Out: 238.8 lm

(M)	Lux	CM
1	228	115
2	57	231
3	25	346
4	14	462
5	9	577

Height Angle: 60° Diameter

Date: 24 March 2025

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.