



YLI INDUSTRY SDN. BHD.

Ultimate Lighting Experience



T8
Elite

9
WATT

18
WATT

4000K

6500K

LED Glass Tube T8 Elite

The Toshiba LED Tube T8 Elite delivers higher lumen output to meet your lighting needs while ensuring greater energy efficiency. With its advanced single-end input system, it provides enhanced safety and reliable performance, giving you peace of mind in every application.




50000
Hrs

220 -
240V



DIMENSION follow IEC 60081

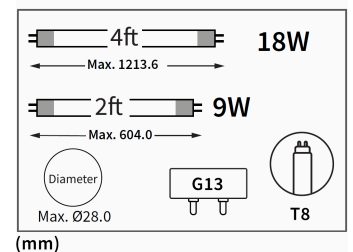

Product Code	Base	Rated Wattage (W)	Luminous Flux (lm)	CCT (K)	Voltage (V)	Efficacy (lm/W)	CRI (Ra)	SDCM	PF	Beam Angle (°)	Lifespan (Hrs)
RLDL0382J0940G1EX1G	G13	9	1120	4000	180-240	124	80	< 6	> 0.9	180	50000
RLDL0382J0965G1EX1G	G13	9	1120	6500	180-240	124	80	< 6	> 0.9	180	50000
RLDL0384J1840G1EX1G	G13	18	2250	4000	180-240	125	80	< 6	> 0.9	180	50000
RLDL0384J1865G1EX1G	G13	18	2250	6500	180-240	125	80	< 6	> 0.9	180	50000

Equivalent: (Compare to conventional fixture with fluorescent lamp)

9W = 18W | 18W = 36W

Total Harmonic Distortion (THDi) : < 20%

Operation Temperature : -20°C to +45°C

Lamp Survival Factor @ 6000Hrs = 90%

Lamp Lumen Maintenance Factor @ 6000Hrs = 80%

