



YLI INDUSTRY SDN. BHD.

Ultimate Lighting Experience




9 WATT

18 WATT

3000K

4000K

6500K

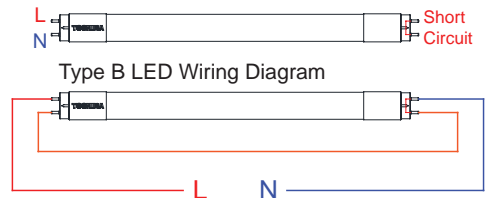

LED GLASS TUBE T8

TOSHIBA LED Glass Tubes are the perfect replacement for fluorescent tubes.

T8 LED can result in up to 70% in energy saving and can be safely performed by the end user.

(Installing the dummy starter with single end model)



25000 Hrs

100 - 240V



Product Code	Base	Rated Wattage (W)	Luminous Flux (lm)	CCT (K)	Voltage (V)	Efficacy (lm/W)	CRI (Ra)	PF	Beam Angle (°)	Lifespan (Hrs)	Dimension (mm)
RLDL82D0930G1EX1G	G13	9	900	3000	100-240	100	80	> 0.5	180	25000	D27.6 x L589
RLDL82D0940G1EX1G	G13	9	900	4000	100-240	100	80	> 0.5	180	25000	D27.6 x L589
RLDL82D0965G1EX1G	G13	9	900	6500	100-240	100	80	> 0.5	180	25000	D27.6 x L589
RLDL84D1830G1EX1G	G13	18	1800	3000	100-240	100	80	> 0.5	180	25000	D27.6 x L1198
RLDL84D1840G1EX1G	G13	18	1800	4000	100-240	100	80	> 0.5	180	25000	D27.6 x L1198
RLDL84D1865G1EX1G	G13	18	1800	6500	100-240	100	80	> 0.5	180	25000	D27.6 x L1198

Equivalent: (Compare to conventional fixture with fluorescent lamp)

9W = 18W | 18W = 36W

Operation Temperature : -20°C to +45°C

Lamp Survival Factor @ 6000Hrs = 90%

Lamp Lumen Maintenance Factor @ 6000Hrs = 80%