



### VELR 135/S



#### Specifications :

Metal Rim (White Texture)  
 Polycarbonate Housing  
 Mild Steel Mounting Bracket  
 Stainless Steel Spring Clips  
 Polycarbonate Opal Diffuser

#### Test Standard :


MS 619-2-22:2005  
 MS IEC 60598-1:2012

#### Mounting Method :

Surface Ceiling Mounted

#### Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.  
 JABATAN BOMBA DAN PENYELAMAT MALAYSIA

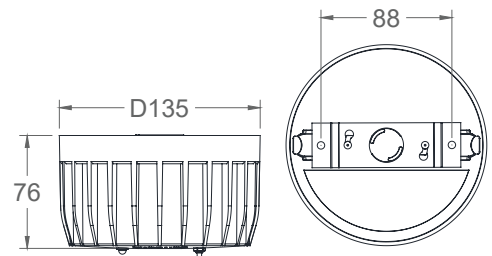

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.0W / 0.93 PF
Mode of Operation	Non-Maintained	Rated Lumen	115 lm
Lamp	LED 3535 (1 PC)	Classification / Degree of Protection	Class I / IP 20
Battery	Ni-Cd SC 3.6V 1800mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	24 Hours	Weight	0.50 KG

Packing : 30 Sets Per Carton Box  
 Outer Carton Box : L440 X W298 X H460 mm (17.65 KG)  
 Inner Carton Box : L145 X W140 X H85 mm (0.56 KG)