



VELR 75/R / VELR 115/R



VELR 75/R



VELR 115/R



Specifications :


Metal Rim (White Texture)
 Separate Mild Steel Gear Box (Black)
 Stainless Steel Spring Clips
 Polycarbonate Frosted Diffuser

Test Standard :


MS 619-2-22:2005
 MS IEC 60598-1:2012

Mounting Method :

Recessed Plaster Ceiling
 VELR 75 - Hole Cut: D67 mm
 VELR 115 - Hole Cut: D100 mm

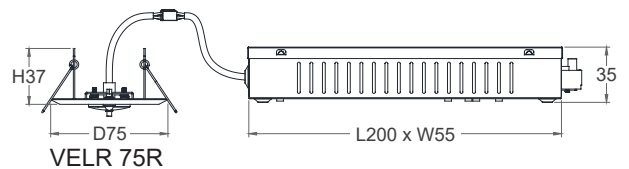

VELR 75R

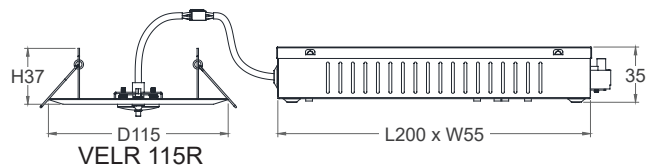

VELR 115R

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
 JABATAN BOMBA DAN PENYELAMAT MALAYSIA

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.0W / 0.93 PF
Mode of Operation	Non-Maintained	Rated Lumen	115 lm
Lamp	LED 3535 (1 PC)	Classification / Degree of Protection	Class I / IP 20
Battery	Ni-Cd SC 3.6V 1800mAh	Max. Operating Temperature (ta)	35°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	24 Hours	Weight	VELR 75/R : 0.45 KG
			VELR 115/R : 0.49 KG

Packing : 30 Sets Per Carton Box
 Carton Box (VELR 75/R) : L476 X W442 X H313 mm (16.65 KG)
 Carton Box (VELR 115/R) : L652 X W474 X H313 mm (18.20 KG)