

VELR 76/N/R / VELR 116/N/R



VELR 76/N/R



VELR 116/N/R



Specifications :

Metal Rim (White Texture)
Polycarbonate Cover
Separate Mild Steel Gear Box (Black)
Stainless Steel Spring Clips
Polycarbonate Frosted Diffuser

Mounting Method :


Recessed Plaster Ceiling
VELR 76/N/R - Hole Cut: D67mm
VELR 116/N/R - Hole Cut: D100mm

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA

Test Standard :

MS 619-2-22:2005
MS IEC 60598-1:2021

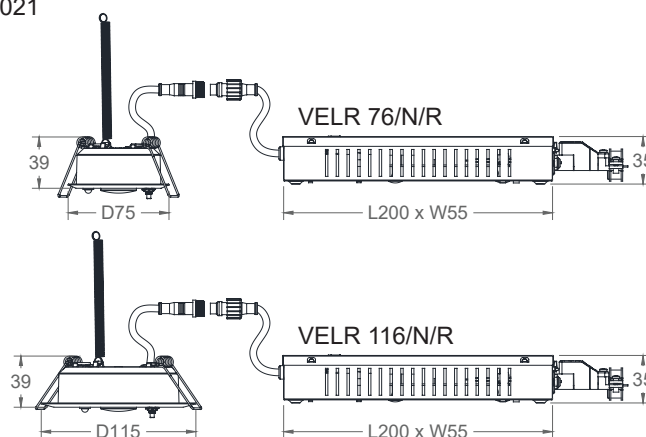

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 1.5W / 0.72 PF
Mode of Operation	Non-Maintained	Rated Lumen	170 lm
Lamp	LED 5050 (1 PC)	Classification / Degree of Protection	Class I / IP 20
Battery	LiFePO4 3.2V / 2.0Ah / 18650	Max. Operating Temperature (ta)	40°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	15 Hours	Weight	VELR 76/N/R
			0.39 KG
			VELR 116/N/R
			0.44 KG