



VELR 90/R / VELR 110/R



VELR 90/R



VELR 110/R

Optional Add-On :
(VELR 90/R)
PC Surface Housing



Specifications :



Polycarbonate Housing
Polycarbonate Clear Diffuser
Stainless Steel Spring & GI Clip

Mounting Method :

Recessed Plaster Ceiling
VELR 90/R - Hole Cut: D80 mm
VELR 110/R - Hole Cut: D95 mm
Surface Ceiling (*Add-On Surface Housing*)

Test Standard :

MS 619-2-22:2005
MS IEC 60598-1:2012

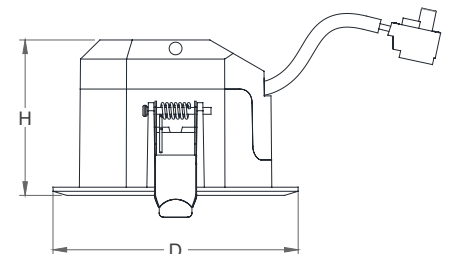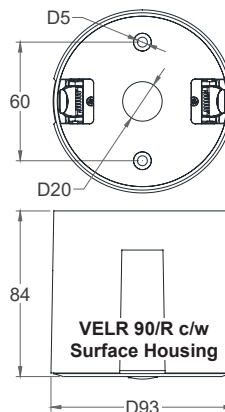

Model	D	H
VELR 90/R	90	57
VELR 110/R	110	55

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 1.0W / 0.66 PF
Mode of Operation	Non-Maintained	Rated Lumen	115 lm
Classification	Class II	Degree of Protection	IP 44 (LED Module) IP 20 (Lamp Fitting)
Lamp	LED 5050 (1 PC)		
Battery	Ni-Cd AA 2.4V 1800mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 3m
Recharge Period	15 Hours	Weight	VELR 90/R 0.20 KG
			VELR 110/R 0.23 KG

Packing : 30 Sets Per Carton Box
Outer Carton Box : L635 x W395 x H160 mm (7.90 KG)
Inner Carton Box : L120 x W120 x H70 mm (0.30 KG)