



Legend	Model
	VES 350/B/E
	VES 350/B/EL
	VES 350/B/ER



Specifications :


Mild Steel Housing
Polycarbonated Diffuser

Mounting Method :

Wall Mounted
Above Doors / Entrances & Exits

Test Standard :

IEC 60598-2-22 : 2021
SS 563-1 : 2010/A1 : 2017
SS 563-2 : 2010/A2 : 2017
IEC 61347-2-7 : 2021

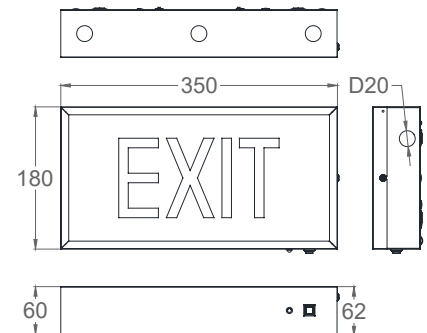

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.9W / 0.8 PF
Mode of Operation	Maintained	Classification	Class I
Lamp	LED 2835 (4 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 900mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	2 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	0.82 KG

Packing : 15 Sets Per Carton Box
Outer Carton Box : L605 X W365 X H385 mm (15.20 KG)
Inner Carton Box : L365 X W190 X H66 mm (0.93 KG)