





Legend	Model
	VKS 560/B/RM
	VKS 560/B/S
	VKS 560/B/L
	VKS 560/B/R



Specifications :

Mild Steel Housing
Opal Diffuser With KELUAR Sign

Test Standard :


MS 983:2004
MS 619-2-22:2005
MS IEC 60598-1:2012

Mounting Method :

Wall Mounted
Above Doors / Entrances & Exits

Certified by :

SIRIM QAS INTERNATIONAL SDN. BHD.
JABATAN BOMBA DAN PENYELAMAT MALAYSIA
JKR Approved

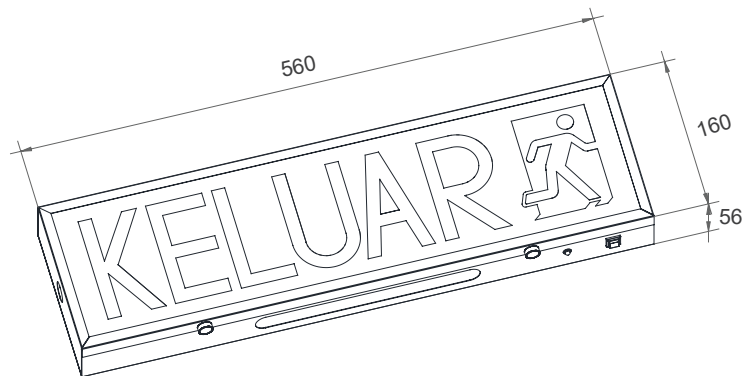

Mains Supply	220 – 240V 50/60Hz	Rating	0.01A / 2.5W / 0.90 PF
Mode of Operation	Maintained	Classification	Class 1
Lamp	LED 2835 (5 PCS)	Degree of Protection	IP 20
Battery	Ni-Cd AA 3.6V 900mAh	Max. Operating Temperature (ta)	40°C
Emergency Duration	3 Hours	Recommended Mounting Height	Min. 2.3m
Recharge Period	24 Hours	Weight	1.28 KG

Packing : 10 sets per carton box
Outer carton box : L587 X W357 X H370 mm (13.90 kg)
Inner carton box : L572 X W173 X H67 mm (1.43 kg)