

## **T8 LED Weatherproof Fitting - Surface Type**

# **VWP 1x600mm**

## **VWP 1x1200mm**











### **VWP 2x1200mm**






#### Specifications:

Date: 10 January 2025

Base & Diffuser is Moulded From
Polycarbonate Resin in Beige (V-2)
Polycarbonate Lampholder
Sealed With Silicone Gasket
Gear Tray is Fabricated From Mild Steel
Pre-Connected With 105°C HR PVC Wire
Snap-On With Nylon Clips
Cable Gland Entry & Hanger Kit

#### **Mounting Method:**

Surface Ceiling Mounted Wall Mounted

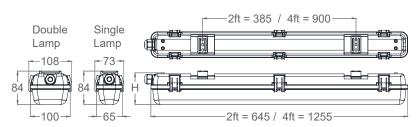

Model		VWP 1x600mm	VWP 2x600mm	VWP 1x1200mm	VWP 2x1200mm
Mains Supply		220 - 240V 50/60Hz			
Base		G13			
Lamp Type		TOSHIBA T8 LED Tube Pro 600mm 8W		TOSHIBA T8 LED Tube Pro 1200mm 14W	
Lamp Lumens		1100lm		2100lm	
Lifespan		50Khrs			
ССТ		3000K   4000K   6500K			
Rating	Power	1 x 8W	2 x 8W	1 x 14W	2 x 14W
	Current	0.035	0.07A	0.06A	0.12A
	Power Factor	> 0.90	> 0.90	> 0.90	> 0.90
System Lumens		1000lm	2000lm	1900lm	3500lm
Beam Angle		130°			
Classification		Class I			
Degree of Protection		IP66			
Max. Operating Temperature (ta)		40°C			
Recommended Mounting Height		Min. 3m			
Weight		0.66 KG	0.96 KG	1.20 KG	1.70 KG