





OASIS 01 SERIES RECESSED ROUND LED DOWNLIGHT

MODEL: OS 201/TC (Tri-Colour) (Phase-Cut Dimmable)

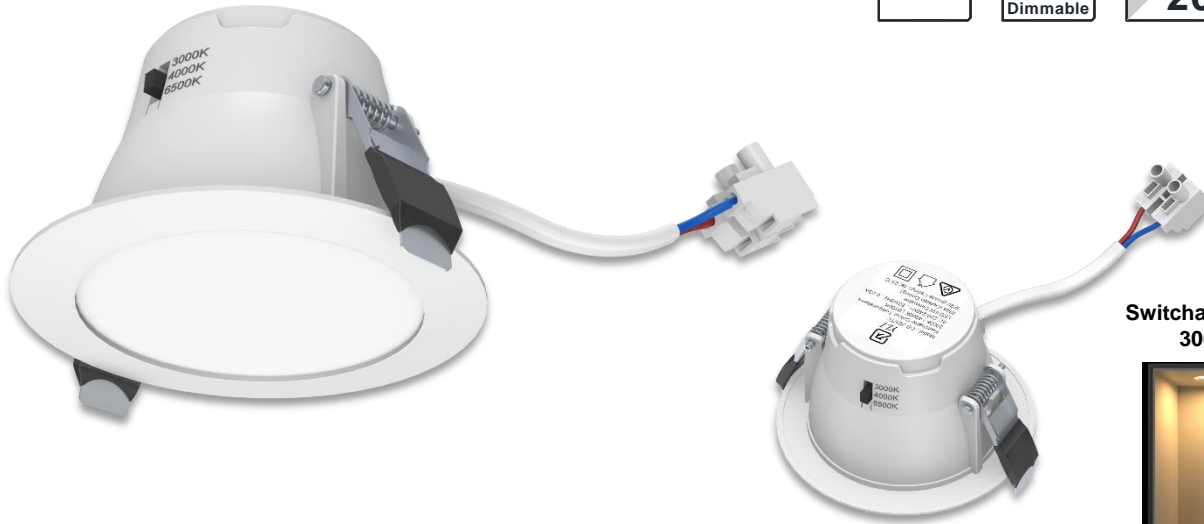

Switchable Colour Temperatures  
3000K | 4000K | 6500K



Specifications & Technical Data

Luminaires:


- Polycarbonate Rim & Housing
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices (2 Way)
- Stainless Steel Spring & GI Clip
- Recessed Ceiling Mounted
- IP20 (Inside Ceiling)
- IP44 (Outside Ceiling)

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


- 1x13W CFLi Downlight &
- Save Over 50% on Energy

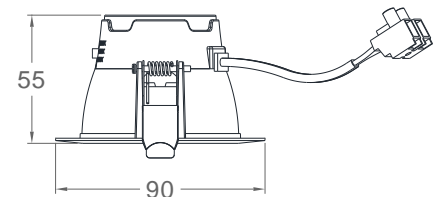

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	Built-In LED Driver		Hole Cut (mm)
					Input	Power Factor	
OS 201/TC	540lm	6W	0.03A	100°	AC 220-240V, 50/60Hz	> 0.85	D75

LED Module	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS201-R-14-TC-3065-G1	80mA	800lm	5W	63V	3000K, 4000K, 6500K	≥ 80	≤ 5	90°C	30000Hrs

Photometric Data

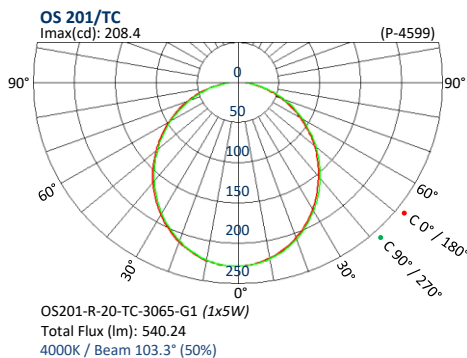

Flux Out: 156.8 lm

Height (M)	Lux	CM
1	150	115
2	37	231
3	17	346
4	9	462
5	6	577

Height Angle: 60° Diameter