



YLI INDUSTRY SDN. BHD. (504654-U)

Ultimate Lighting Experience

Tel: +60-5-366 5227 (Hunting Line), 366 4227, 366 8227, 366 9227 Fax: +60-5-365 1227, 366 1227


Email: info@yli-ind.com.my

Website: www.yli-ind.com.my


Technical Data

**OASIS 01 SERIES RECESSED ROUND LED DOWNLIGHT**

MODEL: OS 201/TC (Flex & Plug) (Tri-Colour) (Phase-Cut Dimmable)



Switchable Colour Temperatures  
3000K | 4000K | 6500K



**Specifications & Technical Data**

**Luminaires:**


- Polycarbonate Rim & Housing
- Polycarbonate **Opal** Diffuser
- Fitted With Flex & Plug (1Mtr)
- Stainless Steel Spring & GI Clip
- Recessed Ceiling Mounted
- IP20 (Inside Ceiling)
- IP44 (Outside Ceiling)

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Replace:**


- 1x13W CFLi Downlight &
- Save Over 50% on Energy

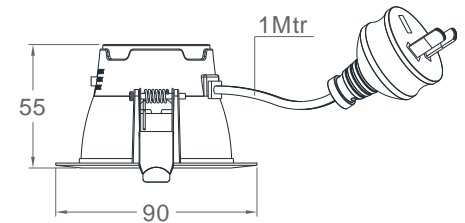

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	Built-In LED Driver		Hole Cut (mm)
					Input	Power Factor	
OS 201/TC	540lm	6W	0.03A	100°	AC 220-240V, 50/60Hz	> 0.85	D75

LED Module	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS201-R-14-TC-3065-G1	80mA	800lm	5W	63V	3000K, 4000K, 6500K	≥ 80	≤ 5	90°C	30000Hrs

**Photometric Data**

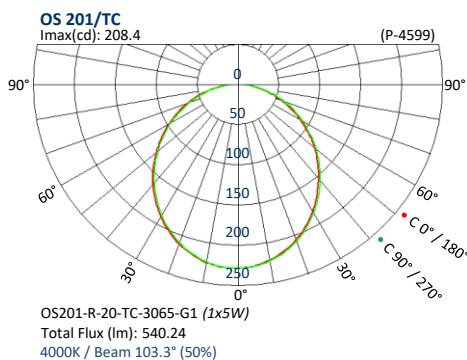

Flux Out: 156.8 lm

Height (M)	Lux	CM
1	150	115
2	37	231
3	17	346
4	9	462
5	6	577

Height Angle: 60° Diameter

Date: 17 August 2024

Max. Operating Temperature at ta -0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.