



YLI INDUSTRY SDN. BHD. (504654-U)

Ultimate Lighting Experience

Tel: +60-5-366 5227 (Hunting Line), 366 4227, 366 8227, 366 9227 Fax: +60-5-365 1227, 366 1227


Email: info@yli-ind.com.my

Website: www.yli-ind.com.my

Technical Data

OASIS 01 SERIES RECESSED ROUND LED DOWNLIGHT

MODEL: OS 301/TC (Tri-Colour) (Phase-Cut Dimmable)



Switchable Colour Temperatures
3000K | 4000K | 6500K



Specifications & Technical Data

Luminaires:


- Polycarbonate Rim & Housing
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices (2 Way)
- Stainless Steel Spring & GI Clip
- Recessed Ceiling Mounted
- IP20 (Inside Ceiling)
- IP44 (Outside Ceiling)

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


- 1x18W CFLi Downlight &
- Save Over 50% on Energy

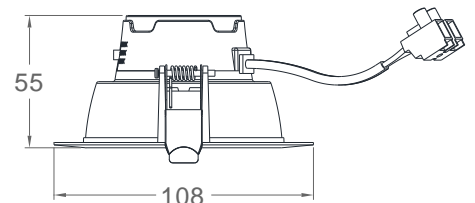

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	Built-In LED Driver		Hole Cut (mm)
					Input	Power Factor	
OS 301/TC	765lm	9W	0.04A	100°	AC 220-240V, 50/60Hz	> 0.90	D90

LED Module	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS301-R-20-TC-3065-G1	80mA	1152lm	7.2W	90V	3000K, 4000K, 6500K	≥ 80	≤ 5	90°C	30000Hrs

Photometric Data

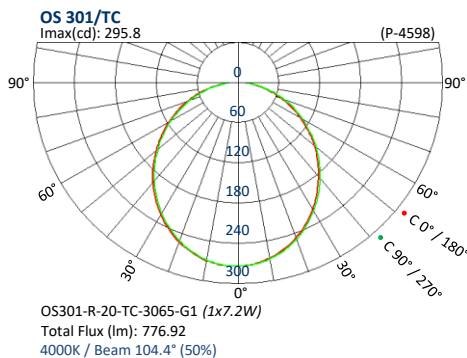

Flux Out: 223.4 lm

Height (M)	Lux	CM
1	213	115
2	53	231
3	24	346
4	13	462
5	9	577

Height Angle: 60° Diameter

Date: 17 August 2024

Max. Operating Temperature at ta -0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.