

OASIS 02 SERIES RECESSED ROUND LED DOWNLIGHT

MODEL: OS 602

Made to Order



powered by

TRIDONIC



Specifications & Technical Data

Luminaires:


- Aluminium Alloy Rim & Housing
- Electrostatically Polyester Powder Coated
- Extruded Aluminium Heatsink
- Polycarbonate **Opal** Diffuser
- Separate Mild Steel Gear Box (GB-208)
- Nylon Connecting Devices
- Safety Hanging Spring
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


2x18W CFL Downlight &  
Save Over 50% on Energy

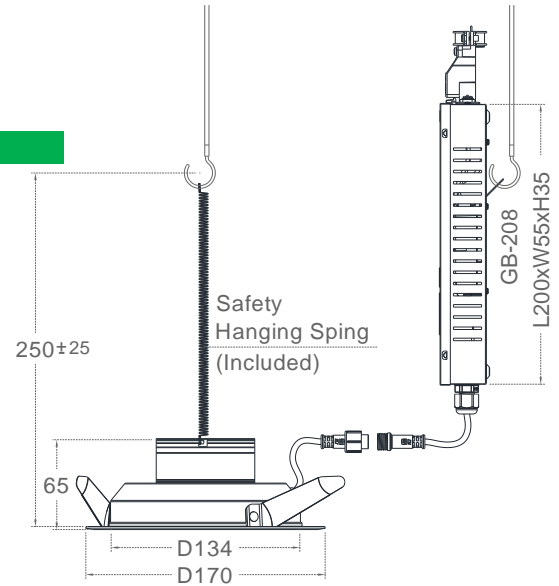

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	TRIDONIC LED Driver (AC 220~240V, 50/60Hz, PF 0.90)	THD	Hole Cut (mm)
OS 602	1700lm	15W	0.07A	OS602-R-48-xxxxK-G2	LC 15/350/42 fixC SC ADV2 <b>or</b> LC 17/250-400/42 flexC SC SNC4	< 20%	D150

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
OS602-R-48-xxxxK-G2 (SMD 2835 12C4B)	250mA	1360lm	8.5W	34V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12.5W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data

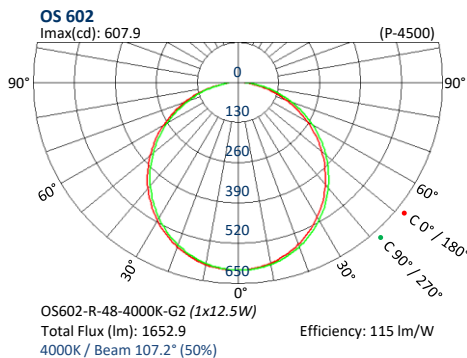

Flux Out: 462.2 lm

Height (M)	Lux	CM
1	441	115
2	110	231
3	49	346
4	28	462
5	18	577

Height Angle: 60° Diameter