



YLI

YLI INDUSTRY SDN. BHD. (504654-U)

Ultimate Lighting Experience

Tel: +60-5-366 5227 (Hunting Line), 366 4227, 366 8227, 366 9227 Fax: +60-5-365 1227, 366 1227

Email: info@yli-ind.com.my

Website: www.yli-ind.com.my

Technical Data

OASIS 05 SERIES RECESSED ROUND LED DOWNLIGHT

MODEL: OS 905

Made to Order



Specifications & Technical Data

Luminaires:


- Aluminium Alloy Rim & Housing
- Electrostatically Polyester Powder Coated
- Extruded Aluminium Heatsink
- Aluminium Anodized Reflector
- Polycarbonate Opal Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


- 2x26W CFL Downlight &
- Save Over 50% on Energy

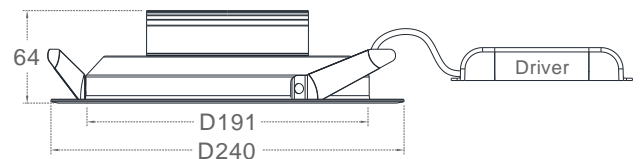

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
OS 905	2200lm	19W	0.08A	OS802-R-55-xxxxK-G2	VLD 25/500/50 or VLD 26-36/500 (T)	D210

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)		
OS802-R-55-xxxxK-G2 (SMD 2835 11C5B)	350mA	1955lm	11.5W	32V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	500mA	2640lm	16.5W	33V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data

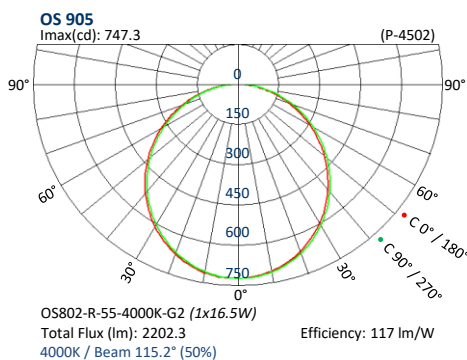

Flux Out: 581.8 lm

Height (M)	Lux	CM
1	556	115
2	139	231
3	62	346
4	35	462
5	22	577

Height Angle: 60° Diameter

Date: 19 August 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.