

OASIS 120/S SERIES SURFACE ROUND LED DOWNLIGHT
MODEL: OS 120/S

Specifications & Technical Data
Luminaires:


- Housing is Fabricated From Aluminium
- Anodized Aluminium Reflector
- Ceramic Lampholder (GU10)
- Nylon Connecting Devices (3 Way)
- Pre-Connected With PVC Wire
- Electrostatically Polyester Powder Coated
- Degree of Protection: **IP20**
- Type of Protection: Class I
- Mounting Method: Surface Ceiling / Suspension

Areas of Application:

Home, Home Office, Bedrooms, Bathroom
Children's Room, Kitchen, Living Room,
Dining Room, Storage Room, Utility Room
Corridor & Walkway

Replace:

**1x35W & 1x50W Halogen PAR16 &
Save Over 80% on Energy**

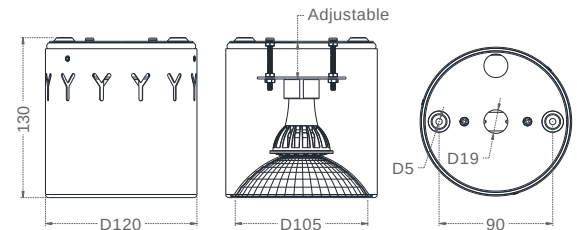

Model	Luminaires						Dimension - mm		Current (A)	P.F. (λ)
	Housing	Reflector Facet	Lamp	Beam Angle	Base	AC Input	D	H	± 5 %	>
OS 120/S	Aluminium	Square	1 x 5W	36°	GU10	220-240V, 50/60Hz	120	130	0.04	> 0.5
			1 x 7.5W	60°	GU10	220-240V, 50/60Hz	120	130	0.06	> 0.5

Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED GU10 5W 3000K 36D (RLDM02K05304U1EX1)	450lm	610cd	5W	3000K	≥ 90	≤ 6	36°	GU10	0.04	> 0.5	220-240V, 50/60Hz	15000Hrs
Brand	Code	Luminous Flux (lm)	Candela (cd)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED GU10 7.5W 3000K 60D (RLDM02K08306U1EX1)	640lm	740cd	7.5W	3000K	≥ 90	≤ 6	60°	GU10	0.06	> 0.5	220-240V, 50/60Hz	15000Hrs

Date: 20 March 2025

Max. Operating Temperature at ta -20°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.