


OASIS 120/S SERIES SURFACE ROUND LED DOWNLIGHT
MODEL: OS 121/S (AC)

Specifications & Technical Data
Luminaires:

- Housing is Fabricated From Aluminium
- Anodized Aluminium Reflector
- Ceramic Lampholder (E27)
- Nylon Connecting Devices (3 Way)
- Pre-Connected With PVC Wire
- Electrostatically Polyester Powder Coated
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling

Areas of Application:

Home, Home Office, Bedrooms, Bathroom
Children's Room, Kitchen, Living Room,
Dining Room, Storage Room, Utility Room
Corridor & Walkway

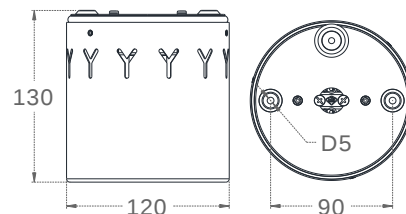

Model	Luminaires					Dimension - mm		Current (A)	P.F. (λ)
	Housing	Reflector Facet	Lamp	Base	AC Input	D	H	± 5 %	>
OS 121/S	Aluminium	Frosted & Stripe	1 x 9W	E27	220~240V, 50/60Hz	120	130	0.06	> 0.50
	Aluminium	Frosted & Stripe	1 x 12W	E27	220~240V, 50/60Hz	120	130	0.08	> 0.50

Brand	Code	Luminous Flux (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED A60 9W 3000K (RLDAJ0930E7EX1)	730lm	9W	3000K	≥ 80	≤ 6	200°	E27	0.06	> 0.5	180-240V, 50/60Hz	15000Hrs
TOSHIBA	LED A60 9W 4000K (RLDAJ0940E7EX1)	770lm	9W	4000K	≥ 80	≤ 6	200°	E27	0.06	> 0.5	180-240V, 50/60Hz	15000Hrs
TOSHIBA	LED A60 9W 6500K (RLDAJ0965E7EX1)	810lm	9W	6500K	≥ 80	≤ 6	200°	E27	0.06	> 0.5	180-240V, 50/60Hz	15000Hrs

Brand	Code	Luminous Flux (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Beam Angle (°)	Lamp Base	Current (A)	Power Factor (λ)	AC Input (V, Hz)	Lifespan (Hrs)
TOSHIBA	LED A60L-12W-3000K (RLDAJ1230E7EX1)	970lm	12W	3000K	≥ 80	≤ 6	200°	E27	0.08	> 0.5	180-240V, 50/60Hz	15000Hrs
TOSHIBA	LED A60L-12W-4000K (RLDAJ1240E7EX1)	1025lm	12W	4000K	≥ 80	≤ 6	200°	E27	0.08	> 0.5	180-240V, 50/60Hz	15000Hrs
TOSHIBA	LED A60L-12W-6500K (RLDAJ1265E7EX1)	1080lm	12W	6500K	≥ 80	≤ 6	200°	E27	0.08	> 0.5	180-240V, 50/60Hz	15000Hrs

Date: 20 March 2025

Max. Operating Temperature at ta -20°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.