


OASIS R 20 SERIES LED RECESSED ROUND DOWNLIGHT
MODEL: OS R720 (AC)

PHILIPS CorePro LED PLC (G24d)
Specifications & Technical Data
Luminaires:

- Mild Steel Rim & Bracket
- Electrostatically Polyester Powder Coated
- Anodized Aluminium Reflector
- Polycarbonate Lampholder (G24d-U)
- Nylon Connecting Devices (3 Way)
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

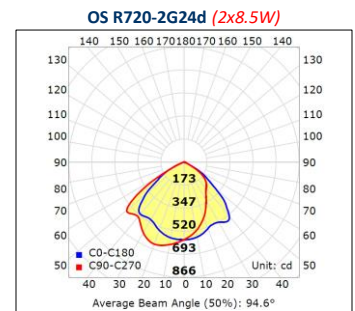



Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Replace:

LED 6.5W Replace **18W CFL**
LED 8.5W Replace **26W CFL**
Save Over 70% on Energy

Model	Rim	Reflector Facet	Lampholder	PHILIPS CorePro LED PLC (G24d)	Dimension (mm)	Hole Cut (mm)
OS R720-1G24d	Mild Steel	Plain	G24d	1 x PHILIPS CorePro PLC 6.5W/8xx 2P G24d-2 1 x PHILIPS CorePro PLC 8.5W/8xx 2P G24d-3	As Shown	D175
OS R720-2G24d	Mild Steel	Plain	G24d	2 x PHILIPS CorePro PLC 6.5W/8xx 2P G24d-2 2 x PHILIPS CorePro PLC 8.5W/8xx 2P G24d-3		

Brand	Code	Luminous Flux (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Lamp Base	AC Input (V, Hz)	Power Factor (λ)	Lifespan (Hrs)
PHILIPS	CorePro LED PLC 6.5W/840 2P G24d-2	650lm	6.5W	4000K	83	< 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 6.5W/865 2P G24d-2	700lm	6.5W	6500K	83	≤ 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 8.5W/840 2P G24d-3	950lm	8.5W	4000K	83	< 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 8.5W/865 2P G24d-3	1000lm	8.5W	6500K	83	≤ 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs

Photometric Data


Total Flux (lm): 624.3
Imax (cd): 395
Date: 16 April 2025

Total Flux (lm): 770.2
Imax (cd): 495

Total Flux (lm): 1246.2
Imax (cd): 590

Total Flux (lm): 1422.6
Imax (cd): 693