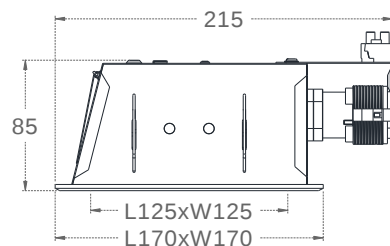


OASIS S 20G SERIES LED RECESSED SQUARE DOWNLIGHT
MODEL: OS S620G (AC)

PHILIPS CorePro LED PLC (G24d)

Specifications & Technical Data
Luminaires:

- Die Cast Aluminium Frame
- Mild Steel Housing & Bracket
- Electrostatically Polyester Powder Coated
- Laminated Aluminium Reflector
- Protective **Frosted** Glass Diffuser
- Polycarbonate Lampholder (G24d-U)
- Nylon Connecting Devices (3 Way)

- Stainless Steel Spring Clips

- Mounting Method: Recessed Ceiling

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Replace:

LED 6.5W Replace **18W CFL**

LED 8.5W Replace **26W CFL**

Save Over **70%** on Energy

Model	Frame	Reflector Facet	Glass Diffuser	Lampholder	PHILIPS CorePro LED PLC (G24d)	Dimension	Hole Cut
						(mm)	(mm)
OS S620G-1G24d	DCA	Plain	Frosted	G24d	1 x PHILIPS CorePro PLC 6.5W/8xx 2P G24d-2	As Shown	153 ²
					1 x PHILIPS CorePro PLC 8.5W/8xx 2P G24d-3		
OS S620G-2G24d	DCA	Plain	Frosted	G24d	2 x PHILIPS CorePro PLC 6.5W/8xx 2P G24d-2		
					2 x PHILIPS CorePro PLC 8.5W/8xx 2P G24d-3		

Brand	Code	Luminous Flux (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Lamp Base	AC Input (V, Hz)	Power Factor (λ)	Lifespan (Hrs)
PHILIPS	CorePro LED PLC 6.5W/840 2P G24d-2	650lm	6.5W	4000K	83	< 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 6.5W/865 2P G24d-2	700lm	6.5W	6500K	83	≤ 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 8.5W/840 2P G24d-3	950lm	8.5W	4000K	83	< 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs
PHILIPS	CorePro LED PLC 8.5W/865 2P G24d-3	1000lm	8.5W	6500K	83	≤ 6	G24d	220~240V, 50/60Hz	PF 0.90	30000Hrs

Photometric Data