

OASIS 21 SERIES RECESSED ROUND LED COB DOWNLIGHT

MODEL: OS D1121

Made to Order



powered by

TRIDONIC



TRIDONIC LED Module

Specifications & Technical Data

Luminaires:


- Aluminium Alloy Rim & Housing
- Aluminium Heatsink (H60mm)
- Anodized Aluminium Reflector (Frosted Facet)
- Polycarbonate **Opal** Diffuser
- Nylon Connecting Devices
- Stainless Steel Spring c/w Heat-Shrink
- Separate Mild Steel Gear Box
- Recessed Ceiling Mounted

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Shop Lighting, Public & Commercial Building

Replace:

- 2x42W CFL Downlight**
- Save Over 50% on Energy**

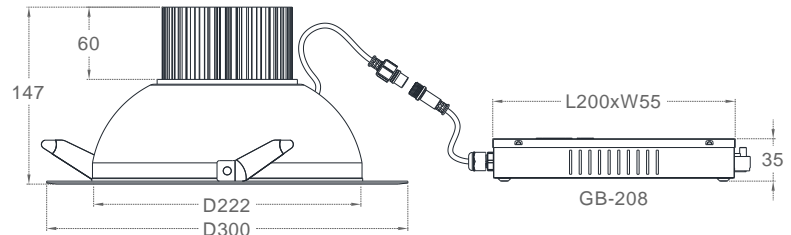

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	TRIDONIC Module SLE ADV8 (DC)	TRIDONIC LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Hole Cut (mm)
OS D1121	4000lm	40W	0.18A	90°	SLE 15mm 4000lm 8xx R ADV8	LC 45/1050/43 fixC SC SNC2 or LC 42/900-1050/42 flexC SC SNC4	D235

TRIDONIC Module SLE ADV8 (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Temp. at tp (°C)	Lifespan (Hrs) (L70/B50)
SLE 15mm 4000lm 830 R ADV8	1050mA	5570lm	35.9W	34.1V	3000K	≥ 80	≤ 3	105°C	65°C	60000Hrs
SLE 15mm 4000lm 840 R ADV8	1050mA	5840lm	35.9W	34.1V	4000K	≥ 80	≤ 3	105°C	65°C	60000Hrs

Date: 04 September 2024