

OASIS 27 SERIES RECESSED ROUND LED DOWNLIGHT
MODEL: OS 627 / OS 627 (HO)


SIRIM
MS IEC 60598-2-2 : 1998
MS IEC 60598-1 : 2012

Specifications & Technical Data
Luminaires:


- Mild Steel Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**2x18W / 2x26W CFL Downlight &
Save Over 50% on Energy**

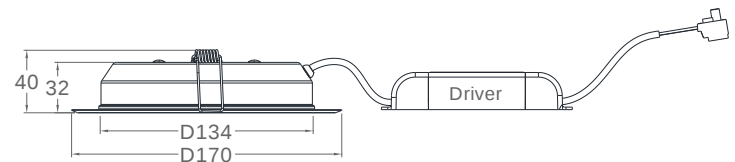

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.50 / 0.90)				Hole Cut (mm)
OS 627	1700lm	15W	0.12A	OS602-R-48-xxxxK-G2	VLD 15/350/43 (PF 0.5) (30K Hrs)				D150
OS 627 (HO)	2000lm	21W	0.09A	OS602-R-48-xxxxK-G2	VLD 25/500/50 (PF 0.9) (30K Hrs)				D150

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS602-R-48-xxxxK-G2 (SMD 2835 12C4B)	350mA	2000lm	12.5W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	500mA	2880lm	18W	36V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

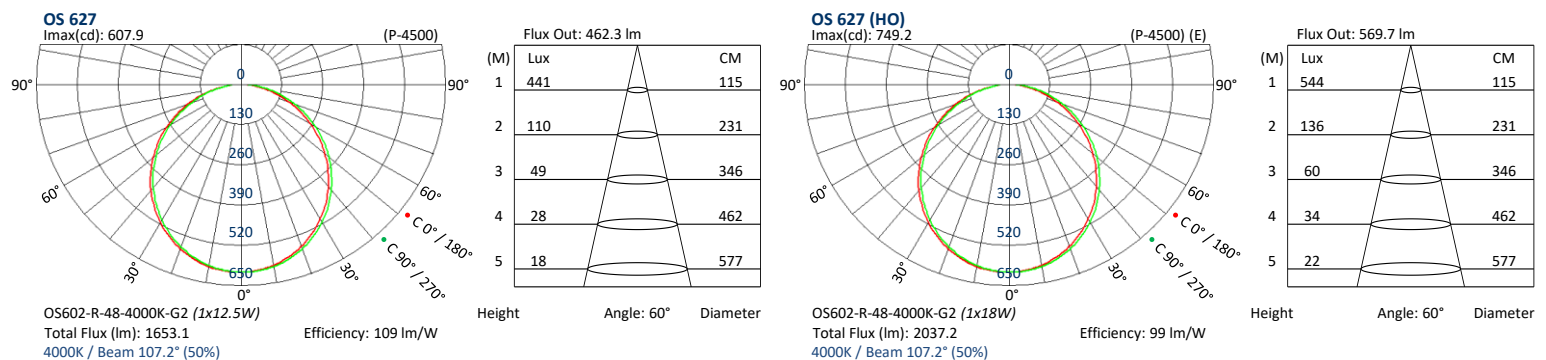Photometric Data


Date: 20 March 2025

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.