

OASIS 27 SERIES RECESSED ROUND LED DOWNLIGHT
MODEL: OS 727 / OS 727 (HO)


SIRIM
MS IEC 60598-2-2 : 1998
MS IEC 60598-1 : 2012

Specifications & Technical Data
Luminaires:


- Mild Steel Rim & Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate **Opal** Diffuser
- Flex & Nylon Connecting Devices
- Stainless Steel Spring Clips
- Recessed Ceiling Mounted

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building


Replace:

**2x26W / 2x32W CFL Downlight &
Save Over 50% on Energy**

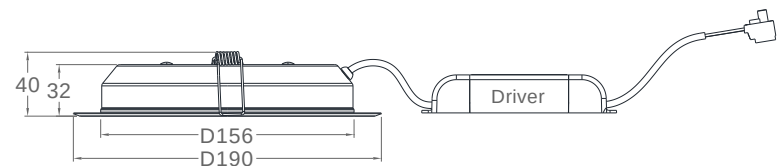

Model	System Lumens (lm)	System Power (W)	System Current (A)	OS LED Modules (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.90)			Hole Cut (mm)
OS 727	2200lm	19W	0.08A	OS702-R-55-xxxxK-G2	VLD 25/500/50 (30K Hrs)			D170
OS 727 (HO)	2600lm	27W	0.12A	OS702-R-55-xxxxK-G2	VLD 35/700/50 (30K Hrs)			D170

OS LED Modules (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
OS702-R-55-xxxxK-G2 (SMD 2835 11C5B)	500mA	2640lm	16.5W	33V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	700mA	3840lm	24W	34V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

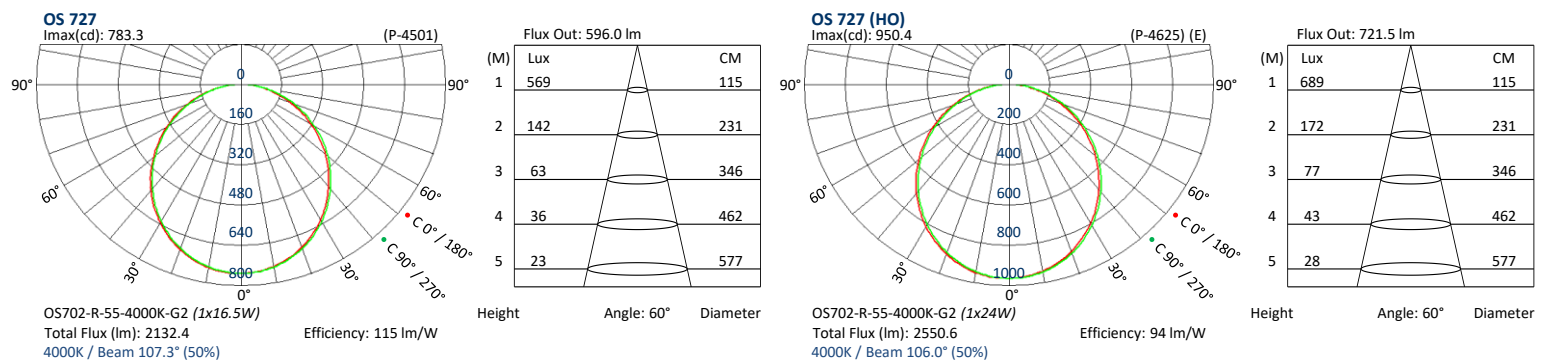Photometric Data


Date: 20 March 2025

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.