

T8 LED Square Daikon Diffuser Fitting


Model: OS SQ 1x600mm/SOL



Specifications & Technical Data

- Housing is Fabricated From Mild Steel (*Thickness 0.3mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- ABS End Cap in White
- **PS (Polystyrene)** Diffuser of **Semi-Opal Linear** Pattern
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With PVC Cable
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling / Wall / Suspension


- Optional:**
- VITALITE VECK 18/T8 LED
 - 2 / 3 Hours Duration Emergency Powerpack

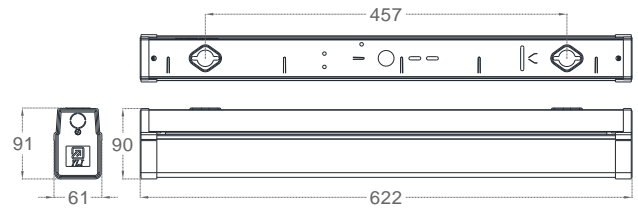

Model	Luminaires					Dimension - mm			Current (A)	P.F. (λ)
	Diffuser	No. of Lamp	Power	Beam Angle	Base	L	W	H	± 5 %	>
OS SQ 1x600mm/SOL	Semi-Opal Linear	1	1 x 9W	180°	G13	622	61	91	0.075	> 0.50

Lamp (AC Input 100-240V, 50/60Hz) (2ft)											
Brand	Code	Type	Base	Lumens (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Current	P.F.	Lifespan (Hrs)
TOSHIBA	T8 LEDtube 600mm 9W 3000K (RLDL82D0930G1EX1G)	T8 LED	G13	900lm	9W	3000K	≥ 80Ra	≤ 6	0.075	> 0.5	25000Hrs
TOSHIBA	T8 LEDtube 600mm 9W 4000K (RLDL82D0940G1EX1G)	T8 LED	G13	900lm	9W	4000K	≥ 80Ra	≤ 6	0.075	> 0.5	25000Hrs
TOSHIBA	T8 LEDtube 600mm 9W 6500K (RLDL82D0965G1EX1G)	T8 LED	G13	900lm	9W	6500K	≥ 80Ra	≤ 6	0.075	> 0.5	25000Hrs

Photometric Data

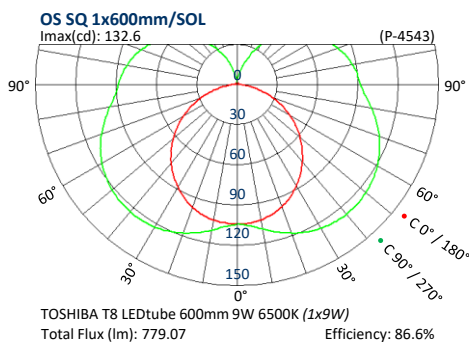

Flux Out: 96.62 lm

(M)	Lux	CM
1	92	115
2	23	231
3	10	346
4	6	462
5	4	577

Height Angle: 60° Diameter