


OASIS SS 04 SERIES SURFACE SQUARE LED DOWNLIGHT

MODEL: OS SS 404

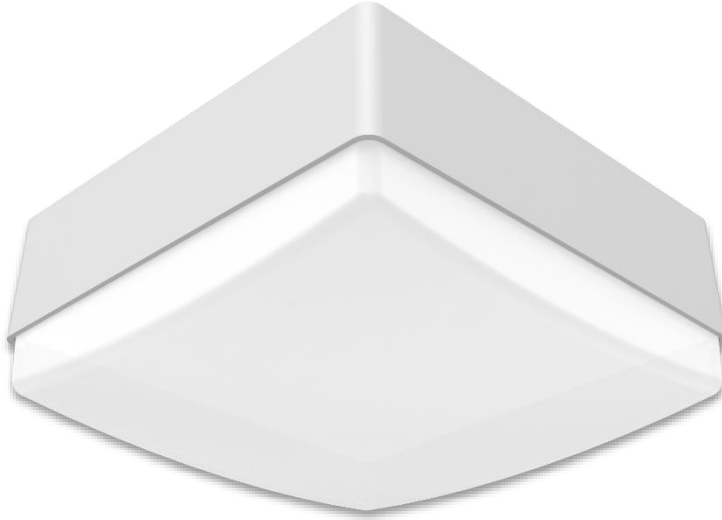

Specifications & Technical Data

Luminaires:


- Polycarbonate Surface Housing
- Polycarbonate Opal Diffuser
- Mild Steel Inner Plate
- Electrostatically Polyester Powder Coated
- Stainless Steel Spring Clip
- Flex & Nylon Connecting Devices
- Surface Ceiling Mounted

Areas of Application:

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

Replace:


**1x26W CFL Downlight &
Save Over 50% on Energy**



| Model | System Lumens (lm) | System Power (W) | System Current (A) | OS LED Modules (DC) | VITALITE LED Driver (AC 220~240V, 50/60Hz, PF 0.50) |
|-----------|--------------------|------------------|--------------------|-------------------------|---|
| OS SS 404 | 1100lm | 11W | 0.09A | OS SS404-SQ-72-xxxxK-G1 | VLD 10/250/40 |

| OS LED Modules (DC) | Current (mA) | Luminous Flux (lm) | Power (W) | Voltage (V) | CCT (K) | CRI (Ra) | SDCM | Max. Temp. at tc (°C) | Lifespan (Hrs) |
|--|--------------|--------------------|-----------|-------------|-------------------|----------|------|-----------------------|----------------|
| OS SS404-SQ-72-xxxxK-G1 (SMD 2835 12C6B) | 250mA | 1440lm | 9W | 36V | 3000K 4000K 6500K | ≥ 80 | ≤ 5 | 85°C | 50000Hrs |

Photometric Data

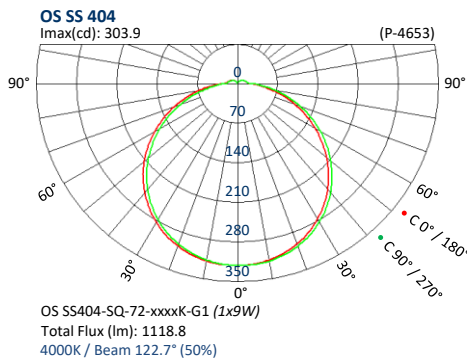

Flux Out: 240.3 lm

| Height (M) | Lux | CM |
|------------|-----|-----|
| 1 | 230 | 115 |
| 2 | 57 | 231 |
| 3 | 26 | 346 |
| 4 | 14 | 462 |
| 5 | 9 | 577 |

Height Angle: 60° Diameter