

OASIS SR500 SERIES SURFACE LED CEILING LIGHT

MODEL: OS SR500



Specifications & Technical Data

Luminaires:


- Mild Steel Base Plate (*White Texture*)
- Acrylic **Opal** Diffuser
- ABS Clips
- Built-In Gear Chamber
- Nylon Connecting Devices
- Finished With Powder Electrostatically
- Surface Ceiling Mounted

Areas of Application:

- Home, Entrances, Hallways, Corridor,
- Terrace, Balcony, Retail, Public &
- Commercial Building


Replace:

- 1x32W FCL Ceiling Light**
- Save Over 50% on Energy**

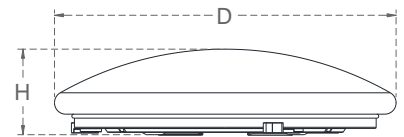

| Model | Diffuser | LED Module - OS500-R-48-xxx xxxK | | | | VIP LED Driver (AC 220-240V, 50/60Hz, PF 0.50) | Dimension (mm) | |
|----------|----------|----------------------------------|------------------|--------------------|---------|---|----------------|----|
| | | System Lumens (lm) | System Power (W) | System Current (A) | CCT (K) | | D | H |
| OS SR500 | Opal | 1200lm | 16W | 0.12A | 3000K | VIP SR500 / 16W | 305 | 75 |
| | Opal | 1200lm | 16W | 0.12A | 4000K | VIP SR500 / 16W | 305 | 75 |
| | Opal | 1200lm | 16W | 0.12A | 6000K | VIP SR500 / 16W | 305 | 75 |

Photometric Data

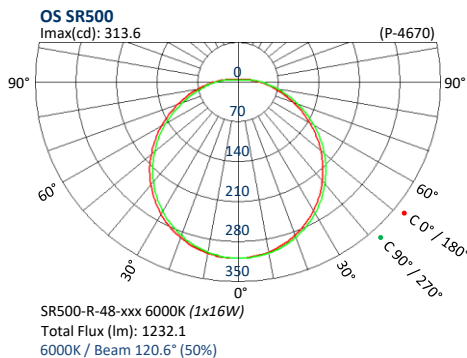

Flux Out: 245.5 lm

| (M) | Lux | CM |
|-----|-----|-----|
| 1 | 234 | 115 |
| 2 | 59 | 231 |
| 3 | 26 | 346 |
| 4 | 15 | 462 |
| 5 | 9 | 577 |

Height Angle: 60° Diameter