

**OASIS TD SERIES LED TEARDROP FITTING - SUSPENSION CEILING**

**MODEL: OS TD-\*/SP-OV Series**

*Made to Order*



**Specifications & Technical Data**

**Luminaires:**


- Extruded Aluminium Housing
- Polycarbonate End Cap
- Polycarbonate Oval Diffuser (*Opal & Linear*)
- Mild Steel Gear Tray & Bracket
- Stove-Coated With Polyester / Epoxy
- Nylon Connecting Devices
- Stainless Steel Suspension Mounting Kit
- Suspension Mounted

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Available Colour:**

- Black Texture
- White Texture

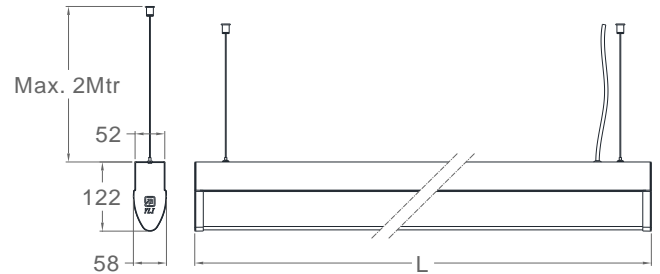

Model	System Lumens (lm)	System Power (W)	System Current (A)	LED Strip Module (DC)	VITALITE LED Driver (AC 220-240V, 50/60Hz, PF 0.5 / 0.9)		Dimension
							L (mm)
OS TD-2/SP-OV	1200lm	10W	0.09A	1 x LED-2FT-STRIP-72-xxxxK-G3	1 x VLD 10/250/40 (PF 0.5)		580
OS TD-4/SP-OV	2300lm	19W	0.08A	1 x LED-4FT-STRIP-144-xxxxK-G3	1 x VLD 25/500/50 (PF 0.9)		1150
OS TD-6/SP-OV	3500lm	29W	0.17A	1 x LED-2FT-STRIP-72-xxxxK-G3 1 x LED-4FT-STRIP-144-xxxxK-G3	1 x VLD 10/250/40 (PF 0.5) 1 x VLD 25/500/50 (PF 0.9)		1705
OS TD-8/SP-OV	4600lm	38W	0.16A	2 x LED-4FT-STRIP-144-xxxxK-G3	2 x VLD 25/500/50 (PF 0.9)		2270
OS TD-2/SP-OV-HO	1700lm	15W	0.12A	1 x LED-2FT-STRIP-72-xxxxK-G3	1 x VLD 15/350/43 (PF 0.5)		580
OS TD-4/SP-OV-HO	3300lm	27W	0.12A	1 x LED-4FT-STRIP-144-xxxxK-G3	1 x VLD 35/700/50 (PF 0.9)		1150
OS TD-6/SP-OV-HO	5000lm	42W	0.24A	1 x LED-2FT-STRIP-72-xxxxK-G3 1 x LED-4FT-STRIP-144-xxxxK-G3	1 x VLD 15/350/43 (PF 0.5) 1 x VLD 35/700/50 (PF 0.9)		1705
OS TD-8/SP-OV-HO	6600lm	54W	0.24A	2 x LED-4FT-STRIP-144-xxxxK-G3	2 x VLD 35/700/50 (PF 0.9)		2270

LED Strip Module (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
LED-2FT-STRIP-72-xxxxK-G3	350mA	2000lm	12.1W	34.5V	3000K, 4000K, 6500K	≥ 80	≤ 5	85°C	50000Hrs
LED-4FT-STRIP-144-xxxxK-G3	700mA	4000lm	25W	35V	3000K, 4000K, 6500K	≥ 80	≤ 5	85°C	50000Hrs

Date: 04 March 2024

Max. Operating Temperature at ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.