

**OASIS TD SERIES LED TEARDROP FITTING - SUSPENSION CEILING**

**MODEL: OS TD-2/SP-OV / OS TD-4/SP-OV / OS TD-6/SP-OV / OS TD-8/SP-OV**

*Made to Order*



powered by

**TRIDONIC**



**Specifications & Technical Data**

**Luminaires:**


- Extruded Aluminium Housing
- Polycarbonate End Cap
- Polycarbonate Oval Diffuser (*Opal & Linear*)
- Mild Steel Gear Tray & Bracket
- Stove-Coated With Polyester / Epoxy
- Nylon Connecting Devices
- Stainless Steel Suspension Mounting Kit
- Suspension Mounted

**Areas of Application:**

- Home, Hospitality, Hotels, Offices,
- Retail, Supermarkets, Restaurants,
- Public & Commercial Building

**Available Colour:**

- Black Texture
- White Texture

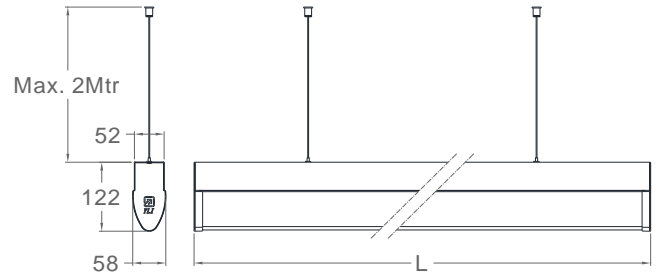

Model	System Lumens (lm)	System Power (W)	System Current (A)	TRIDONIC LED Linear Modules LLE Essence (DC)	TRIDONIC LED Driver (AC 220-240V, 50/60Hz, PF 0.90)	Dimension
						L (mm)
OS TD-2/SP-OV	1600lm	13W	0.07A	1 x LLE 20x560mm 2400lm 8xx LV SNC3	1 x LC 25/200-350/70 flexCC Ip SNC3	580
OS TD-4/SP-OV	3200lm	25W	0.11A	2 x LLE 20x560mm 2400lm 8xx LV SNC3	1 x LC 25/200-350/70 flexCC Ip SNC3	1150
OS TD-6/SP-OV	4800lm	38W	0.17A	3 x LLE 20x560mm 2400lm 8xx LV SNC3	1 x LC 50/200-350/170 flexCC Ip SNC3	1705
OS TD-8/SP-OV	6400lm	50W	0.22A	4 x LLE 20x560mm 2400lm 8xx LV SNC3	1 x LC 50/200-350/170 flexCC Ip SNC3	2270

TRIDONIC LED Linear Modules LLE Essence (DC)	Current (mA)	Luminous Flux (lm)			Power (W)	Voltage (V)	CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Temp. at tp (°C)	Lifespan (Hrs)
		3000K	4000K	6500K							
LLE 20x560mm 2400lm 8xx LV SNC3	350mA	1850lm	1950lm	1950lm	11.8W	33.7V	≥ 80	≤ 3	90°C	50°C	50000Hrs
	400mA	2100lm	2210lm	2210lm	13.5W	33.8V	≥ 80	≤ 3	90°C	50°C	50000Hrs
	450mA	2350lm	2460lm	2460lm	15.3W	34.0V	≥ 80	≤ 3	90°C	50°C	50000Hrs

Date: 04 March 2024