

T8 LED Mirror Louver Fitting type S (Surface Ceiling Mounted / Suspension)
Model: OS YML 2414/S-LED

Specifications & Technical Data

- Housing is Fabricated From Mild Steel (*Thickness 0.5mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Cable
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Reflector Louver of Anodized Aluminium, Specular
- Ribbed Cross Blade of Anodized Aluminium in Matt
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Surface Ceiling / Suspension

Optional:

VITALITE VECK 18/T8 LED


2 / 3 Hours Duration Emergency Powerpack

SSR - Suspension Rod

• SSR 305 (305mm / 12")

• SSR 460 (460mm / 18")


• SSR 610 (610mm / 24")

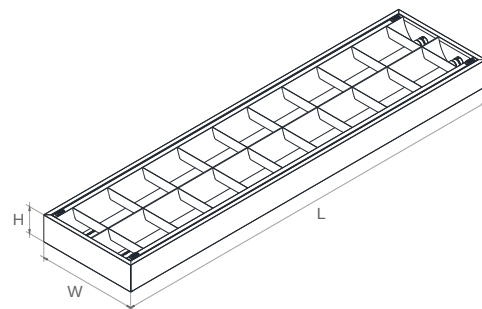

Model	Luminaires					Dimension - mm			Current (A)	P.F. (λ)
	No. of Lamp	Power	Beam Angle	Reflector	Base	L	W	H	± 5 %	>
OS YML 2414/S-LED	2	2 x 14W	80°	Anodized	G13	1223	300	80	0.12	> 0.90

Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (4ft)

Brand	Code	Type	Base	Lumens (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Current	P.F.	Lifespan (Hrs)
TOSHIBA	T8 LEDtube PRO 1200mm 14W 4000K (RLDL0284C1440G1EX1)	T8 LED	G13	2100lm	14W	4000K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs
TOSHIBA	T8 LEDtube PRO 1200mm 14W 6500K (RLDL0284C1465G1EX1)	T8 LED	G13	2100lm	14W	6500K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs

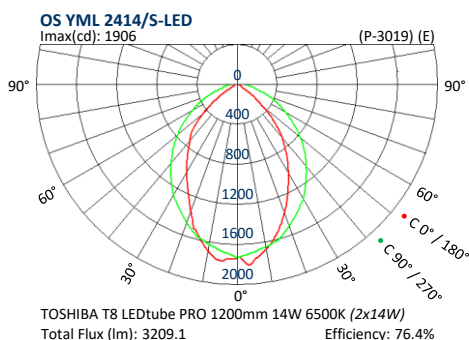Photometric Data


Flux Out: 1260 lm

(M)	Lux	CM
1	1203	115
2	301	231
3	134	346
4	75	462
5	48	577

Height Angle: 60° Diameter