

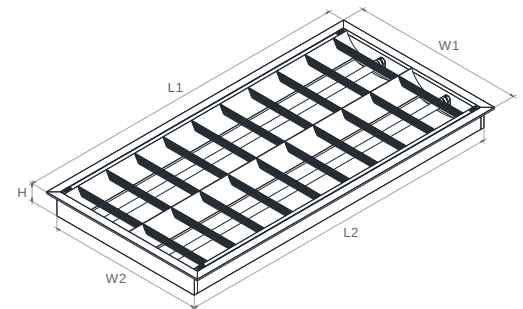
T8 LED Mirror Louver Fitting type RP (Recessed Plaster Ceiling)
Model: OS YML 2424/RP-LED

Specifications & Technical Data

- Housing is Fabricated From Mild Steel (*Thickness 0.5mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Cable
- Connecting Devices of Nylon 3 Way x 2.5mm²
- Reflector Louver of Anodized Aluminium, Specular
- Ribbed Cross Blade of Anodized Aluminium in Matt
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Recessed Plaster Ceiling

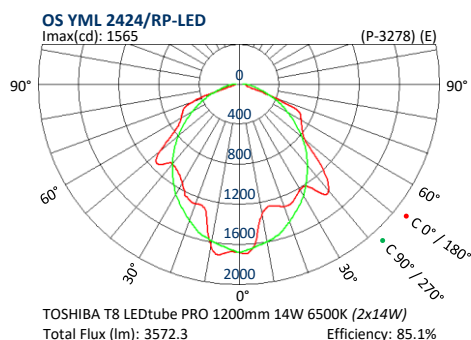
Optional:

VITALITE VECK 18/T8 LED

2 / 3 Hours Duration Emergency Powerpack


Model	Luminaires					Dimension - mm					Current (A)	P.F. (λ)
	No. of Lamp	Power	Beam Angle	Reflector	Base	L1	L2	W1	W2	H	± 5 %	>
OS YML 2424/RP-LED	2	2 x 14W	100°	Anodized	G13	1255	1224	638	580	82	0.12	> 0.90

Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (4ft)											
Brand	Code	Type	Base	Lumens (lm)	Power (W)	CCT (K)	CRI (Ra)	SDCM	Current	P.F.	Lifespan (Hrs)
TOSHIBA	T8 LEDtube PRO 1200mm 14W 4000K (RLDL0284C1440G1EX1)	T8 LED	G13	2100lm	14W	4000K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs
TOSHIBA	T8 LEDtube PRO 1200mm 14W 6500K (RLDL0284C1465G1EX1)	T8 LED	G13	2100lm	14W	6500K	≥ 80Ra	≤ 6	0.06	> 0.9	50000Hrs

Photometric Data


Flux Out: 1018 lm

(M)	Lux	CM
1	972	115
2	243	231
3	108	346
4	61	462
5	39	577

Height Angle: 60° Diameter