

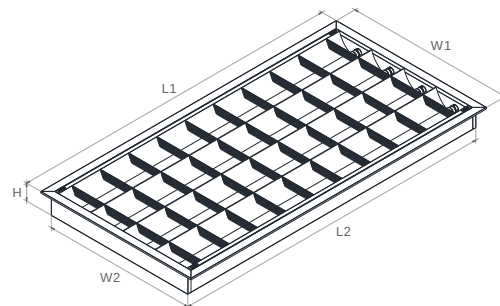
**T8 LED Mirror Louver Fitting type RP (Recessed Plaster Ceiling)**
**Model: OS YML 4424/RP-LED**

**Specifications & Technical Data**

- Housing is Fabricated From Mild Steel (*Thickness 0.5mm*)
- Finished With Powder Electrostatically
- Stove-Coated With High Reflectivity White Epoxy
- Lampholder of Polycarbonate & Bronze
- Twist-Lock Lampholder For Reliable Contact
- Pre-Connected With 105°C HR PVC Cable
- Connecting Devices of Nylon 3 Way x 2.5mm<sup>2</sup>
- Reflector Louver of Anodized Aluminium, Specular
- Ribbed Cross Blade of Anodized Aluminium in Matt
- Degree of Protection: **IP20**
- Type of Protection: Class 1
- Mounting Method: Recessed Plaster Ceiling

**Optional:**

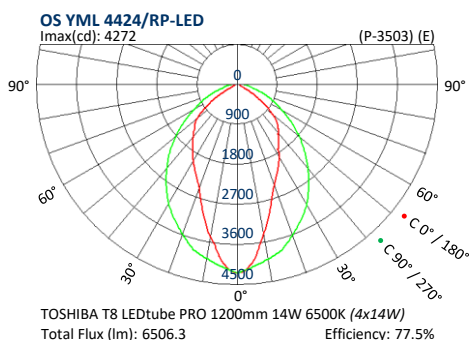
VITALITE VECK 18/T8 LED

**2 / 3** Hours Duration Emergency Powerpack


| Model              | Luminaires  |         |            |           |      | Dimension - mm |      |     |     |    | Current (A) | P.F. (λ) |
|--------------------|-------------|---------|------------|-----------|------|----------------|------|-----|-----|----|-------------|----------|
|                    | No. of Lamp | Power   | Beam Angle | Reflector | Base | L1             | L2   | W1  | W2  | H  | ± 5 %       | >        |
| OS YML 4424/RP-LED | 4           | 4 x 14W | 70°        | Anodized  | G13  | 1255           | 1224 | 638 | 580 | 82 | 0.24        | > 0.90   |

**Lamp (AC Input 100-240V, 50/60Hz, Athd < 15%) (4ft)**

| Brand   | Code                                                    | Type   | Base | Lumens (lm) | Power (W) | CCT (K) | CRI (Ra) | SDCM | Current | P.F.  | Lifespan (Hrs) |
|---------|---------------------------------------------------------|--------|------|-------------|-----------|---------|----------|------|---------|-------|----------------|
| TOSHIBA | T8 LEDtube PRO 1200mm 14W 4000K<br>(RLDL0284C1440G1EX1) | T8 LED | G13  | 2100lm      | 14W       | 4000K   | ≥ 80Ra   | ≤ 6  | 0.06    | > 0.9 | 50000Hrs       |
| TOSHIBA | T8 LEDtube PRO 1200mm 14W 6500K<br>(RLDL0284C1465G1EX1) | T8 LED | G13  | 2100lm      | 14W       | 6500K   | ≥ 80Ra   | ≤ 6  | 0.06    | > 0.9 | 50000Hrs       |

**Photometric Data**


Flux Out: 2502 lm

| (M) | Lux  | CM  |
|-----|------|-----|
| 1   | 2389 | 115 |
| 2   | 597  | 231 |
| 3   | 265  | 346 |
| 4   | 149  | 462 |
| 5   | 96   | 577 |

Height Angle: 60° Diameter