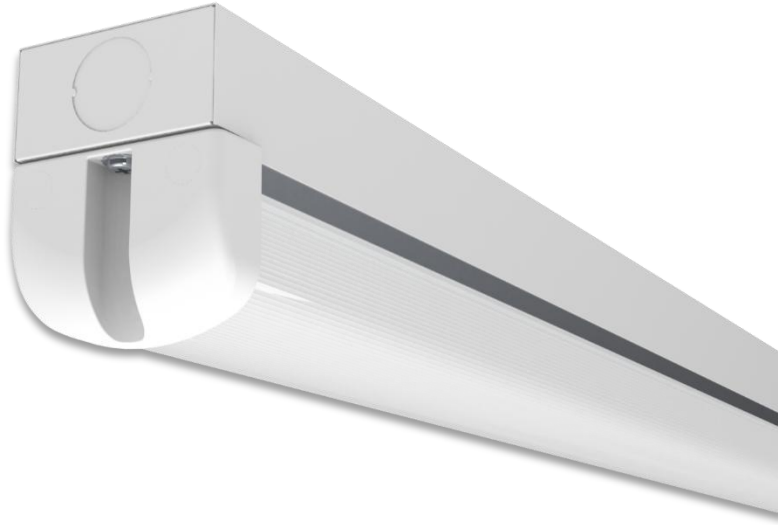


OASIS D /OL REEDED DIFFUSER SERIES LED BATTEN FITTING
MODEL: YOS D2-1/OL
Made to Order

For Non-User Replaceable Light Sources:

"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person".


Specifications & Technical Data
Luminaires:


- Housing is Fabricated From Mild Steel (*T0.5mm*)
- Stove-Coated With High Reflective White Epoxy
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser (*Opal & Linear*)
- Polycarbonate White End Cap
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Surface Ceiling / Wall Mounted or Suspension

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Equivalent:

**2x18W T8 FL Diffuser Fitting &
Over 50% Energy Saving**

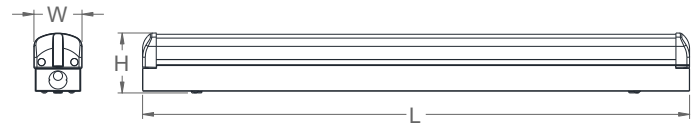

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	LED Strip Module (DC)	TRIDONIC LED Driver (THD < 20%) (AC 220-240V, 50/60Hz, PF 0.90)	Dimension (mm)		
							L	W	H
YOS D2-1/OL	1800lm	14W	0.06A	130°	1 x LED-2FT-STRIP-72-xxxxK-G3	1 x LC 17/250-400/42 flexC SC SNC4 (Dip-Switch Set to 350mA) or 1 x LIFUD LF-GMR020YSIII0350H	600	53	66

LED Strip Module (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
LED-2FT-STRIP-72-xxxxK-G3 (SMD 2835 12C6B)	250mA	1500lm	8.5W	33.5V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	350mA	2000lm	12W	34.5V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data
