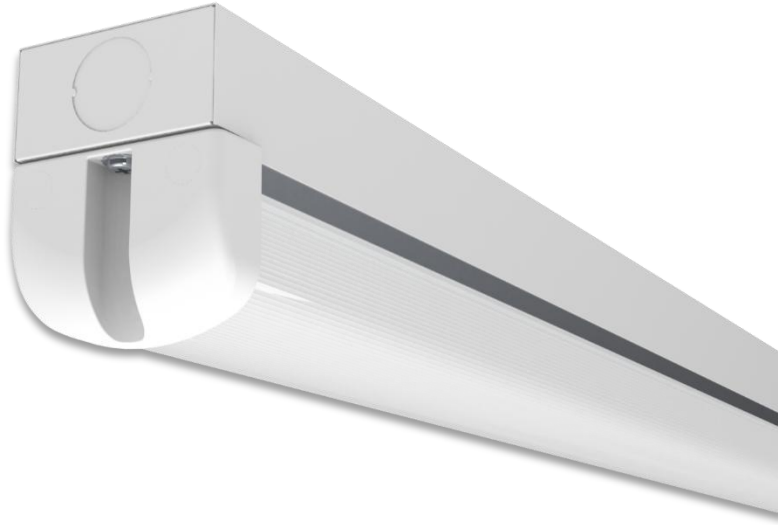


OASIS D /OL REEDED DIFFUSER SERIES LED BATTEN FITTING
MODEL: YOS D4-1/OL
Made to Order

For Non-User Replaceable Light Sources:

"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person".


Optional:

SSR - Suspension Rod

• SSR 305 (305mm / 12")

• SSR 460 (460mm / 18")

• SSR 610 (610mm / 24")

Specifications & Technical Data
Luminaires:


- Housing is Fabricated From Mild Steel (*T0.5mm*)
- Stove-Coated With High Reflective White Epoxy
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser (*Opal & Linear*)
- Polycarbonate White End Cap
- Nylon Connecting Devices
- Pre-Connected With PVC Cable
- Surface Ceiling / Wall Mounted or Suspension

Areas of Application:

Home, Hospitality, Hotels, Offices,
Retail, Supermarkets, Restaurants,
Public & Commercial Building

Equivalent:

**2x36W T8 FL Diffuser Fitting &
Over 50% Energy Saving**

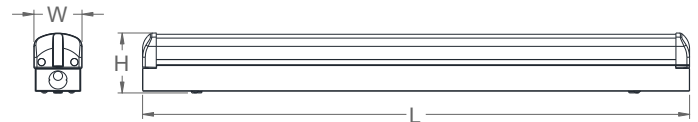

Model	System Lumens (lm)	System Power (W)	System Current (A)	Beam Angle (°)	LED Strip Module (DC)	TRIDONIC LED Driver (THD < 20%) (AC 220-240V, 50/60Hz, PF 0.90)	Dimension (mm)		
							L	W	H
YOS D4-1/OL	3600lm	27W	0.12A	130°	1 x LED-4FT-STRIP-144-xxxxK-G3	1 x LC 36/700-850/42 flexC SC SNC4 (<i>Dip-Switch Set to 700mA</i>) or 1 x LIFUD LF-GMR040YSIII0700H	1160	53	66

LED Strip Module (DC)	Current (mA)	Luminous Flux (lm)	Power (W)	Voltage (V)	CCT (K)			CRI (Ra)	SDCM	Max. Temp. at tc (°C)	Lifespan (Hrs)
LED-4FT-STRIP-144-xxxxK-G3 (SMD 2835 12C12B)	500mA	2880lm	17W	34V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs
	700mA	4000lm	25W	35V	3000K	4000K	6500K	≥ 80	≤ 5	85°C	50000Hrs

Photometric Data
