



YLI



PT.YLI INDUSTRY INDONESIA

SNI LUMINAIRES Product
EMERGENCY LIGHTING Booklet
LIGHTING ACCESSORIES 2 0 2 4
2 0 2 5



INDOOR

T8 LED ULTRA SLIM BATTEN FITTING - VIP LSB SERIES

Features:

- **T0.17mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- D20mm Conduit Pipe Accessible

Mounting Type:

Surface Ceiling / Wall / Suspension

Classification:
Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >150°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	VIP LSB-2	VIP LSB-4
DIMENSION (mm)	(L)613 x (W)33 x (H)50	(L)1222 x (W)33 x (H)50
WATTAGE	1 x 9W	1 x 18W
LUMEN	900lm	1800lm

T8 LED SLIM BATTEN FITTING - OS BS SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Nylon Connecting Devices provided

Mounting Type:

Surface Ceiling / Wall / Suspension

Classification:
Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >150°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS BS 120/LED	OS BS 220/LED	OS BS 140/LED	OS BS 240/LED
DIMENSION (mm)	(L)612 x (W)42 x (H)68	(L)612 x (W)88 x (H)65	(L)1222 x (W)42 x (H)68	(L)1222 x (W)88 x (H)65
WATTAGE	1 x 9W	2 x 9W	1 x 18W	2 x 18W
LUMEN	900lm	1800lm	1800lm	3600lm

INDOOR

T8 LED BARE BATTEN FITTING - OS BC SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Compatible with **Powerpack**
- Nylon Connecting Device

Mounting Type:

Surface Ceiling / Wall / Suspension

Classification:
Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >150°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



Optional:

MER Reflector

MIR Reflector

MODEL	OS BC 1x600mm	OS BC 2x600mm	OS BC 1x1200mm	OS BC 2x1200mm
DIMENSION (mm)	(L)612 x (W)52 x (H)72	(L)612 x (W)89 x (H)70	(L)1222 x (W)52 x (H)72	(L)1222 x (W)89 x (H)70
WATTAGE	1 x 9W	2 x 9W	1 x 18W	2 x 18W
LUMEN	900lm	1800lm	1800lm	3600lm

T8 LED TRIANGLE FITTING - OS TMER / TMIR SERIES

Features:

- **T0.5mm** Mild Steel Housing
- **T0.3mm** Anodized Aluminium Mirror Reflector (TMIR)
- **T0.3mm** White Metal Reflector (TMER)
- **G13** Polycarbonate & Bronze Lampholder
- Electrostatically Polyester Powder Coated

Mounting Type:

Surface Ceiling / Wall

Classification:
Class I

Lamp Specification:


Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >160°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS TMER 2x600mm	OS TMER 2x1200mm	OS TMIR 2x600mm	OS TMIR 2x1200mm
DIMENSION (mm)	(L)612 x (W)152 x (H)63	(L)1222 x (W)152 x (H)63	(L)612 x (W)152 x (H)63	(L)1222 x (W)152 x (H)63
WATTAGE	2 x 9W	2 x 18W	2 x 9W	2 x 18W
LUMEN	1800lm	3600lm	1800lm	3600lm

INDOOR

T8 LED SQUARE DAIKON DIFFUSER FITTING - OS SQ SERIES

Features:

- **T0.3mm** Mild Steel Housing
- **G13** Polycarbonate & Bronze Lampholder
- **P5** (Polystyrene) Diffuser with Semi-Opal Linear Pattern
- Electrostatically Polyester Powder Coated

Mounting Type:

Surface Ceiling / Wall / Suspension

Classification: Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >130°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS SQ 1x600mm/SOL	OS SQ 2x600mm/SOL	OS SQ 1x1200mm/SOL	OS SQ 2x1200mm/SOL
DIMENSION (mm)	(L)622 x (W)61 x (H)91	(L)622 x (W)135 x (H)92	(L)1232 x (W)61 x (H)91	(L)1232 x (W)135 x (H)92
WATTAGE	1 x 9W	2 x 9W	1 x 18W	2 x 18W
LUMEN	900lm	1800lm	1800lm	3600lm

INDOOR

T8 LED MIRROR LOUVER FITTING - OS VIP B SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Laminated Aluminium Mirror Louver

Mounting Type:

Recessed T-Bar Ceiling - Metric Size

Classification: Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >70°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS VIP B 2212/R-MM-LED	OS VIP B 3222/R-MM-LED	OS VIP B 4222/R-MM-LED
DIMENSION (mm)	(L)597 x (W)297 x (H)80	(L)597 x (W)597 x (H)80	(L)597 x (W)597 x (H)80
WATTAGE	2 x 9W	3 x 9W	4 x 9W
LUMEN	1800lm	2700lm	3600lm

MODEL	OS VIP B 2414/R-MM-LED	OS VIP B 3424/R-MM-LED	OS VIP B 4424/R-MM-LED
DIMENSION (mm)	(L)1197 x (W)297 x (H)80	(L)1197 x (W)597 x (H)80	(L)1197 x (W)597 x (H)80
WATTAGE	2 x 18W	3 x 18W	4 x 18W
LUMEN	3600lm	5400lm	7200lm

T8 LED MIRROR LOUVER FITTING - OS VIP SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Laminated Aluminium Mirror Louver

Mounting Type:

Recessed Plaster Ceiling

Classification: Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >110°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS VIP 2212/RP/LED	OS VIP 2414/RP/LED
DIMENSION (mm)	(L)635 x (L2)613 x (W)295 (W2)273 x (H)53	(L)1246 x (L2)1223 x (W)295 (W2)273 x (H)53
WATTAGE	2 x 9W	2 x 18W
LUMEN	1800lm	3600lm

T8 LED MIRROR LOUVER FITTING - OS ML SERIES

Features:

- **T0.5mm** Mild Steel Housing
- Laminated Aluminium Mirror Louver
- **G13** Polycarbonate & Bronze Lampholder
- Electrostatically Polyester Powder Coated

Mounting Type:

Surface Ceiling / Suspension

Classification: Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >60°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS ML 2212/S-LED	OS ML 3222/S-LED	OS ML 2414/S-LED	OS ML 3424/S-LED
DIMENSION (mm)	(L)613 x (W)300 x (H)80	(L)613 x (W)603 x (H)80	(L)1223 x (W)300 x (H)80	(L)1223 x (W)603 x (H)80
WATTAGE	2 x 9W	3 x 9W	2 x 18W	3 x 18W
LUMEN	1800lm	2700lm	3600lm	5400lm

INDOOR

T8 LED HINGED DIFFUSER FITTING - OS VIP B HD SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- **PS** (Polystyrene) Prismatic Diffuser

Mounting Type:

Recessed T-Bar Ceiling - Metric Size

Classification:
Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >100°/110°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS VIP B HD 2212/R-MM-LED	OS VIP B HD 3222/R-MM-LED	OS VIP B HD 4222/R-MM-LED
DIMENSION (mm)	(L)597 x (W)297 x (H)80	(L)597 x (W)597 x (H)80	(L)597 x (W)597 x (H)80
WATTAGE	2 x 9w	3 x 9w	4 x 9W
LUMEN	1800lm	2700lm	3600lm

MODEL	OS VIP B HD 2414/R-MM-LED	OS VIP B HD 3424/R-MM-LED	OS VIP B HD 4424/R-MM-LED
DIMENSION (mm)	(L)1197 x (W)297 x (H)80	(L)1197 x (W)597 x (H)80	(L)1197 x (W)597 x (H)80
WATTAGE	2 x 18w	3 x 18W	4 x 18W
LUMEN	3600lm	5400lm	7200lm

LED PANEL LIGHT TYPE VERTICAL (RECESSED) - VIP PL SERIES

Features:

- **T0.3mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate Opal Diffuser
- Built-in Recessed Plaster Ceiling Spring Clips

Mounting Type:

Recessed Plaster / Recessed T-Bar Ceiling - Metric Size

Classification:
Class I

Lamp Specification:

Brand: YLI
Lifetime: 30,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 2 years
Beam Angle (°): >110°

Efficacy (lm/W): >100
CRI (Ra): >80
Optional: ASF - Aluminium Surface For Surface Ceiling Mounted

Power Factor: >0.5
IP Rating: IP 20



MODEL	VIP PL12/R-MM	VIP PL14/R-MM	VIP PL22/R-MM	VIP PL24/R-MM
DIMENSION (mm)	(L)595 x (W)295 x (H)40	(L)1195 x (W)295 x (H)40	(L)1195 x (W)595 x (H)40	(L)1195 x (W)595 x (H)40
WATTAGE	17W	34W	32W	64W
LUMEN	1600lm	3200lm	3300lm	6600lm

INDOOR

LED TRACK SPOTLIGHT - OS TR 01 SERIES

Features:

- Die Casted Aluminium Rim & Aluminium Extruded Body
- Electrostatically Polyester Powder Coated
- Polycarbonate Gear Box & Adaptor
- Adjustable Lamp Position

Mounting Type:

Track / Ceiling Cap

Classification:
Class I

Lamp Specification:

Brand: TOSHIBA GU10
Lifetime: 15,000 hrs

CCT:
Warm White (3000K)

Warranty: 1 year
Beam Angle (°): >36°

Efficacy (lm/W): >85
CRI (Ra): >90

Power Factor: >0.5
IP Rating: IP 20



MODEL	OS TR 301
DIMENSION (mm)	(D)60 x (D2)44 x (H)150
WATTAGE	1 x 7.5W
LUMEN	640lm

LED TRACK SPOTLIGHT - OS TR 03 SERIES

Features:

- Die Casted Aluminium Rim & Aluminium Extruded Body
- Electrostatically Polyester Powder Coated
- Polycarbonate Gear Box & Adaptor
- Adjustable Lamp Position

Mounting Type:

Track

Classification:
Class I

Lamp Specification:

Brand: TRIDONIC
Lifetime: 50,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K)

Warranty: 2 years
Beam Angle (°): >20°/30°/45°/60°

Efficacy (lm/W): >125
CRI (Ra): >80

Power Factor: >0.9
IP Rating: IP 20



OS111- COB LED Module

MODEL	OS TR 503
DIMENSION (mm)	(D)123 x (H)220
WATTAGE	27W
LUMEN	3700lm

INDOOR

RECESSED VERTICAL DOWNLIGHT - EV SERIES

Features:

- Mild Steel Rim & Bracket
- Electrostatically Polyester Powder Coated
- E27 Ceramic Lampholder
- Vacuum Aluminium Reflector

Mounting Type:

Recessed Ceiling

Classification:

Class I

Lamp Specification:

Brand: TOSHIBA A BULB / T-STICK
Lifetime: 15,000 hrs

CCT:
 Warm White (2700K & 3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >100°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



RECESSED VERTICAL DOWNLIGHT - EV G SERIES

Features:

- Mild Steel Rim & Bracket
- Electrostatically Polyester Powder Coated
- E27 Ceramic Lampholder
- Vacuum Aluminium Reflector

Mounting Type:

Recessed Ceiling

Classification:

Class I

Brand: TOSHIBA A BULB
Lifetime: 25,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >120°

Efficacy (lm/W): >108
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	EV100	EV125	EV160
DIMENSION (mm)	(D)122 x (H)135	(D)140 x (H)170	(D)173 x (H)185
WATTAGE	8W	9W	12W
LUMEN	800lm	972lm	1296lm

MODEL	EV125G	EV160G
DIMENSION (mm)	(D)140 x (H)175	(D)179 x (H)190
WATTAGE	9W	9W
LUMEN	972lm	972lm

INDOOR

LED RECESSED ROUND DOWNLIGHT - VIP 06 SERIES

Features:

- Mild Steel Rim & Bracket
- Electrostatically Polyester Powder Coated
- Vacuum Aluminium Reflector (Frosted & Stripe Facet)
- E27 Ceramic Lampholder
- Nylon Connecting Devices (3 Way)
- Stainless Steel Spring Clips

Mounting Type:

Recessed Ceiling

Classification:

Class I

Lamp Specification:

Brand: TOSHIBA A BULB
Lifetime: 15,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >200°

Efficacy (lm/W): >108
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



ADJUSTABLE LED RECESSED ROUND DOWNLIGHT - OS 07/A SERIES

Features:

- Die Cast Aluminium Rim & Ring
- Electrostatically Polyester Powder Coated
- Adjustable Lamp Position
- Nylon Connecting Devices
- Separate Mild Steel Gear Box

Mounting Type:

Recessed Ceiling

Classification:

Class I

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K)

Warranty: 3 years
Beam Angle (°): >20°/ 30°/ 45°/ 60°

Efficacy (lm/W): >125
CRI (Ra): >80

Power Factor: >0.95
IP Rating: IP20



OS111- COB LED Module

MODEL	VIP 406	VIP 606
DIMENSION (mm)	(D)141 x (H)135	(D)173 x (H)135
WATTAGE	7W / 9W / 12W	7W / 9W / 12W
LUMEN	956lm / 972lm / 1296lm	956lm / 972lm / 1296lm

MODEL	OS 607/A
DIMENSION (mm)	(D)160 x (H)56 x (D2)110
WATTAGE	40W
LUMEN	5000lm

INDOOR

LED RECESSED ROUND DOWNLIGHT - OS 26 SERIES

Features:

- Mild Steel Rim fixed with Stainless Steel Spring Clips
- Electrostatically Polyester Powder Coated
- PS (Polystyrene) Opal Diffuser
- Built-in Gear Chamber

Mounting Type:

Recessed Ceiling

Classification:

Class I

Lamp Specification:

Brand: YLI
Lifetime: 30,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6000K)

Warranty: 1 year
Beam Angle (°): >110°

Efficacy (lm/W): >85
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP20



MODEL	OS R326	OS R426	OS R626
DIMENSION (mm)	(D)115 x (H)58	(D)140 x (H)58	(D)170 x (H)58
WATTAGE	9W	11W	13W
LUMEN	800lm	950lm	1150lm

LED RECESSED ROUND DOWNLIGHT - OS 27 SERIES

Features:

- Mild Steel Rim fixed with Stainless Steel Spring Clips
- Electrostatically Polyester Powder Coated
- Polycarbonate Opal Diffuser
- Separated Gear Chamber

Mounting Type:

Recessed Ceiling

Classification:

Class II

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 2 years
Beam Angle (°): >105°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5 / 0.9
IP Rating: IP 20



MODEL	OS 427	OS 627	OS 727
DIMENSION (mm)	(D)140 x (H)40	(D)170 x (H)40	(D)190 x (H)40
WATTAGE	11W	15W	19W
LUMEN	1100lm	1700lm	2200lm

MODEL	OS 827	OS 927
DIMENSION (mm)	(D)215 x (H)40	(D)240 x (H)40
WATTAGE	19W	19W
LUMEN	2200lm	2200lm

INDOOR

LED SURFACE DOWNLIGHT - VIP 03 SERIES

Features:

- Polycarbonate Surface Housing
- Polycarbonate Body & Opal Diffuser
- Electrostatically Polyester Powder Coated
- Flex & Nylon Connecting Devices

Mounting Type:

Surface Ceiling

Classification:

Class II

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 2 years
Beam Angle (°): >120°

Efficacy (lm/W): >105
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 20



MODEL	VIP SR 403	VIP SR 803	VIP SS 403	VIP SS 803
DIMENSION (mm)	(D)142 x (H)58	(D)191 x (H)58	(D)133 x (H)58	(D)182 x (H)58
WATTAGE	11W	20W	11W	20W
LUMEN	1200lm	2200lm	1100lm	2200lm

CEILING LIGHT - OS / VIP SR SERIES

Features:

- Mild Steel Base Plate fixed with ABS Clips
- Electrostatically Polyester Powder Coated
- E27 Ceramic Lampholder (OS SR Series only)
- Acrylic Opal Diffuser

Mounting Type:

Surface Ceiling / Wall

Classification:

Class II

Lamp Specification (SR Series):

Brand: TOSHIBA
Lifetime: 15,000 hrs

CCT:
Warm White (2700K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >120°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.55
IP Rating: IP 20

Lamp Specification (VIP SR Series):

Brand: YLI
Lifetime: 30,000 hrs

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6000K)

Warranty: 1 year
Beam Angle (°): >120°

Efficacy (lm/W): >60
CRI (Ra): >80

Power Factor: >0.55
IP Rating: IP20



MODEL	SR500	SR501	VIP SR500	VIP SR501
DIMENSION (mm)	(D)305 x (H)75	(D)390 x (H)98	(D)305 x (H)75	(D)390 x (H)98
WATTAGE	2 x 8W	2 x 11W	16W	24W
LUMEN	1600 lm	2200lm	950lm	1700lm

INDOOR

ECONOMY LED HIGH BAY - OS UFO E SERIES

Features:

- Powder Coated Aluminium Housing & Heatsink
- Polycarbonate Diffuser Lens
- Pre-Connected With 105°C HR PVC Cable
- Safety Steel Wire Included

Mounting Type:

Hanging

Classification:

Class I

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT: Daylight (6500K)

Warranty: 2 years
Beam Angle (°): >80°

Efficacy (lm/W): >110
CRI (Ra): >80

Power Factor: >0.9
IP Rating: IP 20

OS UFO-E200



OS UFO-E250



OS UFO-E300



MODEL	OS UFO-E200	OS UFO-E250	OS UFO-E300
DIMENSION (mm)	(D)211 x (H)110	(D)260 x (H)110	(D)303 x (H)110
WATTAGE	60W	100W	150W
LUMEN	7000lm	11500lm	17000lm

OUTDOOR

T8 LED WEATHERPROOF FITTING - OS YWP SERIES

Features:

- Grey PC Base and Linear PC Diffuser (made to V-2)
- Sealed with Silicone Gasket
- Snap-on with Stainless Steel Chips
- **G13** Polycarbonate & Bronze Lampholder

Mounting Type:

Surface Ceiling / Wall / Suspension

Classification:

Class I

Lamp Specification:

Brand: TOSHIBA
Lifetime: 25,000 hrs

CCT: Warm White (3000K); Cool White (4000K); Daylight (6500K)

Warranty: 1 year
Beam Angle (°): >130°

Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 65



MODEL	OS YWP 1x600mm	OS YWP 2x600mm	OS YWP 1x1200mm	OS YWP 2x1200mm
DIMENSION (mm)	(L)652 x (W)66 x (H)80	(L)652 x (W)100 x (H)80	(L)1260 x (W)66 x (H)80	(L)1260 x (W)100 x (H)80
WATTAGE	1 x 9W	2 x 9W	1 x 18W	2 x 18W
LUMEN	900lm	1800lm	1800lm	3600lm

CEILING CAP

E27 CEILING CAP LAMPHOLDER - H127-A / H127-R / H127-S

Model:

H127-A

Material:

Body - Base : E27 Polycarbonate (PC)

Contact

Brass

Wiring Type & Cross Section:

0.5 - 2.5mm²

Rating:

1A, 240V, Max. 120W

Mounting Type:

Rear Fixing Holder



Model:

H127-R

Material:

Body - Base : E27 Polycarbonate (PC)

Contact

Brass

Wiring Type & Cross Section:

0.5 - 2.5mm²

Rating:

1A, 240V, Max. 120W



Model:

H127-S

Material:

Body - Base : E27 Polycarbonate (PC)

Contact


Brass

Wiring Type & Cross Section:

0.5 - 2.5mm²

Rating:

1A, 240V, Max. 120W



LED STREET LIGHT - OS ST81 SERIES

Features:

- Die Casted Aluminium Body & Adjustable Arm
- Electrostatically Polyester Powder Coated
- Polycarbonate Optical Lens
- Photocell, DALI , 0 / 1-10V dimming is optional

Mounting Type:

Arm Mount (D40-60mm)

Classification:

Class I

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT: Cool White (4000K)

Warranty: 2 years
CRI (Ra): >70

Efficacy (lm/W): >130
IP Rating: IP 66

Power Factor: >0.95
IK Rating: IK 08



MODEL	OS ST81060	OS ST81100	OS ST81150
DIMENSION (mm)	(L)549 x (W)163 x (H)82	(L)601 x (W)183 x (H)89	(L)686 x (W)210 x (H)97
WATTAGE	60W	100W	150W
LUMEN	7800lm	13000lm	19500lm

LAMP & ACCESSORIES

TOSHIBA LED A BULB SERIES

Features:

- Wide range of brightness with all 3 color temperatures options, TOSHIBA LED A Bulb series have been useful over the time, generation to generation. Long lasting, Robust and Eyes safety LED quality with 200 degree wide beam angle.

Lamp Specification:

Brand:
TOSHIBA

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty:

1 year

Efficacy (lm/W):

>100

Power Factor:

>0.5



MODEL	RLDA02J03**E7EX1	RLDA02J05**E7EX1	RLDA02J07**0E7EX1	RLDA02J09**E7EX1
BULB SHAPE	A45	A50	A55	A60
DIMENSION (mm)	(D)45 x (H)80	(D)50 x (H)88	(D)55 x (H)100	(D)60 x (H)108
WATTAGE	3W	5W	7W	9W
LUMEN	324lm - 350lm	540lm - 560lm	756lm - 770lm	972lm - 990lm
MODEL	RLDA02J12**E7EX1	RLDA02J15**E7EX1	RLDA02J18**E7EX1	RLDA02J20**E7EX1
BULB SHAPE	A60	A70	A80	A95
DIMENSION (mm)	(D)60 x (H)110	(D)70 x (H)138	(D)80 x (H)151	(D)95 x (H)175
WATTAGE	12W	15W	18W	20W
LUMEN	1296lm - 1320lm	1620lm - 1650lm	1944lm - 2010lm	2160lm - 2300lm

TOSHIBA LED HIGH WATTAGE T-STICK

Features:

- Polycarbonate Surface Housing
- Flex & Nylon Connecting Devices
- E27 Lamp Base

Lamp Specification:

Brand:
TOSHIBA

CCT:

Warm White (2700K);
Daylight (6500K)

Warranty:

1 year

Efficacy (lm/W):

>100

Power Factor:

>0.5



MODEL	RLDT30**E7EX1	RLDT40**E7EX1	RLDT50**E7EX1
BULB SHAPE	T100	T120	T140
DIMENSION (mm)	(D)100 x (H)165	(D)118 x (H)196	(D)138 x (H)221
WATTAGE	30W	40W	50W
LUMEN	3030lm-3200lm	4200lm-4400lm	5350lm-5500lm

TOSHIBA LED GU10

Features:

- TOSHIBA LED GU10 is high-end reflector lamp with outstanding CRI Ra90. 5W model and 7.5W model is available. RG0 rating, no harmful blue light. It is compatible with wide variety of fixtures and is a perfect replacement for any halogen lamp. It can save up to 86% energy consumption.

Lamp Specification:

Brand:
TOSHIBA

CCT:

Warm White (2700K)

Warranty:

1 year

Efficacy (lm/W):

>85

Power Factor:

>0.9



5W



7.5W

MODEL	RLDM02K05304U1EX1	RLDM02K08306U1EX1
DIMENSION (mm)	(D)50 x (H)53	(D)50 x (H)53
WATTAGE	5W	7.5W
LUMEN	450lm	640lm

LAMP

TOSHIBA LED GLASS TUBE

Features:

- TOSHIBA LED Glass Tubes are the perfect replacement for fluorescent tubes. T8 LED can result in up to 70% energy saving and can be safely performed by the end user.

Lamp Specification:


Brand:
TOSHIBA

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty:
1 year

Efficacy (lm/W):
>100

Power Factor:
>0.5

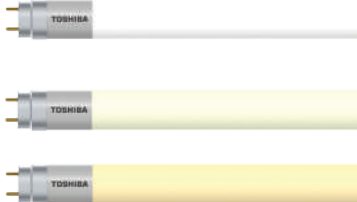

MODEL	RLDL82D09**G1EX1G	RLDL84D18**G1EX1G
DIMENSION (mm)	(D)27.6 x (L)589	(D)27.6 x (L)1198
WATTAGE	9W	18W
LUMEN	900lm	1800lm

TOSHIBA LED PRO TUBE

Features:

- TOSHIBA LED Pro Tubes let you perfectly light up wide range of the applications such as office, factory and public space. It will ensure bright light and low energy consumption as well as long lifespan. It is available in 1100lm (2ft) and 2100lm (4ft).

Lamp Specification:

Brand:
TOSHIBA

CCT:
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty:
1 year

Efficacy (lm/W):
>137.5

Power Factor:
>0.9



MODEL	RLDL0282C08**G1EX1	RLDL0284C14**G1EX1
DIMENSION (mm)	(D)27.6 x (L)589	(D)27.6 x (L)1198
WATTAGE	8W	14W
LUMEN	1100lm	2100lm

BOX PANEL

DB BOX

Features:

- Mild Steel Housing
- Finished With Powder Electrostatically
- Safety Push Clip Lock and Key

Specification:

Brand:
YLI

IP Rating:
IP 20



MODEL	DB 25x25x12	DB 20x30x12	DB 25x35x12	DB 30x40x15	DB 30x40x20
DIMENSION (mm)	(W)250 x (L)250 x (H)120	(W)200 x (L)300 x (H)120	(W)250 x (L)350 x (H)120	(W)300 x (L)400 x (H)150	(W)300 x (L)400 x (H)200
THICKNESS	0.7mm	0.7mm	0.7mm	0.7mm	0.7mm
MODEL	DB 40x50x20	DB 40x60x20	DB 50x60x20	DB 50x70x20	DB 60x80x20
DIMENSION (mm)	(W)400 x (L)500 x (H)200	(W)400 x (L)600 x (H)200	(W)500 x (L)600 x (H)200	(W)500 x (L)700 x (H)200	(W)600 x (L)800 x (H)200
THICKNESS	0.9mm	0.9mm	0.9mm	0.9mm	0.9mm

ACCESSORIES

T8 LAMPHOLDER




MODEL	FLH 805-S
MATERIAL	ABS & Brass
BASE	G13 (T8 Fluorescent Lamp)
RATING	2A / 250V
MOUNTING	Push Fit Base



MODEL	FLH 8 05-H
MATERIAL	ABS, Brass & Stainless Steel Spring
BASE	G13 (T8 Fluorescent Lamp)
RATING	2A / 250V
MOUNTING	Push Fit Base



MODEL	FLH 101
MATERIAL	ABS & Brass
BASE	G13 (T8 Fluorescent Lamp)
RATING	2A / 250V
MOUNTING	Push Through Fixing




MODEL	FTH 806
MATERIAL	ABS & Brass
BASE	2 x G13 (T8 Fluorescent Lamp) & 1 x GZ12.9
RATING	2A / 250V
MOUNTING	Push Fit Base


T8 LAMPHOLDER



MODEL	FSH 803
MATERIAL	ABS
BASE	GZ12.9
RATING	2A / 250V
MOUNTING	Front and Rear Split Pin, Rear Fixing Hole

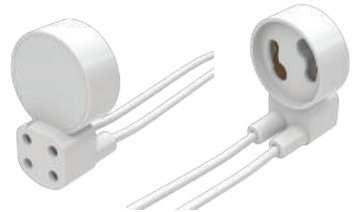

MODEL	FCH 807
MATERIAL	PC
FOR LAMP	T9 21W / 28W / 30W / 38W
LAMP BASE	G10q & GZ12.9
MOUNTING	Without Fixing



MODEL	FTH 806-E
MATERIAL	ABS & Brass
BASE	2 x G13 (T8 Fluorescent Lamp)
RATING	2A / 250V
MOUNTING	Push Fit Base



MODEL	FC 081
MATERIAL	G1 Spring
FOR LAMP	T8
MOUNTING	Rear Fixing Hole

ACCESSORIES

TRACK

Track Specification:

Brand:
YLI

Available Colour:
Black
White



MODEL	OS TRACK 11	OS TRACK 12	OS TRACK 13
MATERIAL	Aluminium, Polycarbonate & Bronze		
DIMENSION(mm)	(L)1000mm x (W)35mm x (H)20mm	(L)2000mm x (W)35mm x (H)20mm	(L)3000mm x (W)35mm x (H)20mm
RATING	Single Circuit / 250V / 10A		
MOUNTING	Push Fit Base		

TRACK ADAPTER

Track Adapter Specification:

Brand:
YLI

Available Colour:
Black
White




Function:

For Track Linking

Material:

Polycarbonate & Brass

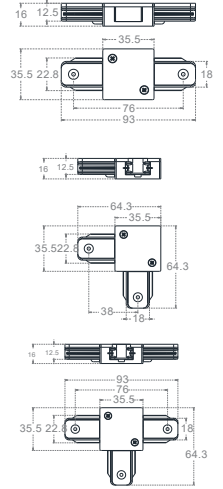

STEEL BAND - GI



MODEL	12mm x 10m GI	17mm x 10m GI	25mm x 10m GI
MATERIAL	GI (Thickness 0.6mm)	GI (Thickness 0.8mm)	GI (Thickness 1.0mm)
DIMENSION	(L)15mm x (W)12mm	(L)20mm x (W)17.2mm	(L)25mm x (W)25.4mm

Emergency Lighting Emergency Conversion Kit

LED EMERGENCY LIGHT - SURFACE TYPE

Features:

- Polycarbonate Housing
- Mild Steel Gear Tray
- Polycarbonate Clear Linear Diffuser

Mounting Type:

Surface/Ceiling / Wall

Classification:

Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation: Non-Maintained

Warranty: 1 year **Rating:** 0.01A / 1.5W / 0.74PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature: 40°C



MODEL	VEL 260/N/S
DIMENSION (mm)	(L)260 x (W)90 x (H)60
LAMP	LED 2835 (16 PCS)
RATED LUMEN	125lm

LED EMERGENCY LIGHT - SURFACE TYPE

Features:

- Mild Steel Housing
- Polycarbonate Opal Linear Diffuser

Mounting Type:

Surface/Ceiling / Wall

Classification:

Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode of Operation: Non-Maintained

Warranty: 1 year **Rating:** 0.005A / 1.2W / 0.91PF

Recharge Period: 24 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature: 35°C



MODEL	VEL 330/ST
DIMENSION (mm)	(L)330 x (W)116 x (H)68
LAMP	LED 2835 (20PCS)
RATED LUMEN	75lm

LED EMERGENCY LIGHT - RECESSED TYPE

Features:

- Mild Steel Housing
- Prismatic Diffuser
- Stainless Steel Spring Clips

Mounting Type:

Recessed Plaster Ceiling
(Hole Cut L350mm x W125mm)

Classification:

Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode of Operation: Non-Maintained

Warranty: 1 year **Rating:** 0.005A / 1.2W / 0.91PF

Recharge Period: 24 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature: 35°C



MODEL	VEL 360/RT
DIMENSION (mm)	(L)360 x (W)145 x (H)72
LAMP	LED 2835 (20PCS)
RATED LUMEN	75lm

LED EMERGENCY LIGHT - ROUND RECESSED TYPE

Features:

- Polycarbonate Housing
- Stainless Steel Clip

Mounting Type:

Recessed Plaster Ceiling
(VELR 90/R - Hole Cut : D80 mm)
(VELR 110/R - Hole Cut D95 mm)

Classification:
Class II

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation:
Non-Maintained

Warranty: 1 year **Rating:** 0.01A / 1.0W / 0.66PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 2.4V 1800mAh

IP Rating: IP 20 (Lamp Fitting)
Mains Supply: 220 – 240V 50/60Hz
IP 44 (LED Module)

Max. Operating Temperature:
40°C



MODEL	VEL 90/R	VEL 110/R
DIMENSION (mm)	(D)90 x (H)57	(D)110 x (H)55
LAMP	LED 5050 (1 PC)	LED 5050 (1 PC)
RATED LUMEN	115lm	115lm

LED EMERGENCY LIGHT - ROUND SURFACE TYPE

Features:

- Polycarbonate or Aluminium Surface Housing
- Stainless Steel Spring Clips
- Polycarbonate Clear Diffuser
- Mild Steel Mounting Base

Mounting Type:
Surface Ceiling

Classification:
Class II

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation:
Non-Maintained

Warranty: 1 year **Rating:** 0.01A / 1.0W / 0.66PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 2.4V 1800mAh

IP Rating: IP 20 (Lamp Fitting)
Mains Supply: 220 – 240V 50/60Hz
IP 44 (LED Module)

Max. Operating Temperature:
40°C



MODEL	VELR 90/S	VELR 110/S
DIMENSION (mm)	(D)93 x (H)84	(D)120 x (H)137
LAMP	LED 5050 (1 PC)	LED 5050 (1 PC)
RATED LUMEN	115lm	115lm

LED EMERGENCY LIGHT - ROUND RECESSED TYPE

Features:

- Metal Rim (White Texture)
- Stainless Steel Spring Clips
- Separate Mild Steel Gear Box (Black)
- Polycarbonate Frosted Diffuser

Mounting Type:

Recessed Plaster Ceiling
(VELR 75 Hole Cut:D67 mm)
(VELR 115 Hole Cut:D100 mm)

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation:
Non-Maintained

Warranty: 1 year **Rating:** 0.01A / 2.0W / 0.93 PF

Recharge Period: 24 Hours **Battery:** Ni-Cd SC 3.6V 1800mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
35°C



MODEL	VELR 75/R	VELR 115/R
DIMENSION (mm)	(D)75 x (H)34	(D)115 x (H)34
LAMP	LED 3535 (1PC)	LED 3535 (1PC)
RATED LUMEN	115lm	115lm

LED EMERGENCY LIGHT - TWIN LAMP SPOTLIGHT

Features:

- Polycarbonate Housing
- Mild Steel Mounting Base
- Two Fully Adjustable Round Shape Light Heads
- Polycarbonate Clear Diffuser
- Innovative, Snap-Together Design For Fast Installation

Mounting Type:
Surface Ceiling / Wall

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation:
Non-Maintained

Warranty: 1 year **Rating:** 0.01A / 1.5W / 0.74 PF

Recharge Period: 15 Hours **Battery:** Ni-Cd SC 3.6V 1800mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
40°C



MODEL	VELR 225/N/TLS
DIMENSION (mm)	(L)225 x (W)110 x (H)73
LAMP	LED 2835 (2 x 8 PCS)
RATED LUMEN	185 lm

LED EMERGENCY LIGHT - TWIN LAMP SPOTLIGHT (IP65)

Features:

- Polycarbonate Housing
- Acrylic Prismatic Diffuser
- Adjustable Lamp Head

Mounting Type:
Wall

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 3 Hours

Mode Of Operation:
Non-Maintained

Warranty: 1 year **Rating:** 0.017A / 3.2W / 0.8 PF

Recharge Period: 24 Hours **Battery:** Ni-Cd 9.6V C 2500mAh

IP Rating: IP 65 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
35°C



MODEL	VEL 280/TLS
DIMENSION (mm)	(L)280 x (W)65 x (H)305
LAMP	LED 2 x 15 PCS
RATED	800lm-500lm

LED EXIT SIGN - SURFACE BOX TYPE (SINGLE SIDED ONLY)

Features:

- Mild Steel Housing
- Polycarbonated Diffuser

Mounting Type:
Wall
(Above Doors / Entrances & Exits)

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 2 Hours

Mode Of Operation:
Maintained

Warranty: 1 year **Rating:** 0.01A / 2.9W / 0.8PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Main Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
35°C



EXIT	VES 350/B/E
←EXIT	VES 350/B/EL
EXIT→	VES 350/B/ER

MODEL	VES 350/B
DIMENSION (mm)	(L)350 x (W)60 x (H)180
LAMP	LED 2835 (4 PCS)

LED EXIT SIGN - SLIM TYPE (SURFACE)

Features:

- Aluminium Extruded Housing
- Mild Steel Mounting Base
- Polycarbonate Diffuser

Mounting Type:
Surface Ceiling / Wall

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 2 Hours

Mode Of Operation:
Maintained

Warranty: 1 year **Rating:** 0.01A / 3.0W / 0.8PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Mains Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
40°C



EXIT	VES 335/STS/E (Single Sided View)		VES 335/STS/RM (Single Sided View)
←EXIT	VES 335/STS/ELRA (Double Sided View)		VES 335/STS/RMLRA (Double Sided View)

MODEL	VES 335/STS
DIMENSION (mm)	(L)335 x (W)47 x (H)252
LAMP	LED 2835 (18 PCS)

LED EXIT SIGN - SLIM TYPE (SEMI-RECESSED)

Features:

- Aluminium Extruded Housing
- Mild Steel Mounting Base
- Polycarbonate Diffuser

Mounting Type:
Recessed Plaster Ceiling
(Hole Cut L350mm x W60mm)

Classification:
Class I

Lamp Specification:

Brand: YLI **Emergency Duration:** 2 Hours

Mode Of Operation:
Maintained

Warranty: 1 year **Rating:** 0.01A / 3.0W / 0.8PF

Recharge Period: 15 Hours **Battery:** Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20 **Main Supply:** 220 – 240V 50/60Hz

Max. Operating Temperature:
40°C



EXIT	VES 335/STSR/E (Single Sided View)		VES 335/STSR/RM (Single Sided View)
←EXIT	VES 335/STSR/ELRA (Double Sided View)		VES 335/STSR/RMLRA (Double Sided View)

MODEL	VES 335/STSR
DIMENSION (mm)	(L)400 x (W)80 x (H)252
LAMP	LED 2835 (18 PCS)

LED EXIT SIGN - WEATHERPROOF (IP65) (SINGLE SIDED ONLY)

- Features:**
- Polycarbonate Housing & Diffuser
 - Snap-On With Polycarbonate Clips

Mounting Type:
Wall
(For Outdoor Area)

Classification:
Class II

Lamp Specification:

Brand: YLI
Emergency Duration: 2 Hours

Mode Of Operation:
Maintained

Warranty: 1 year
Rating: 0.01A / 2.9W / 0.8PF

Recharge Period: 15 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 65
Mains Supply: 220 – 240V 50/60Hz

Max. Operating Temperature:
40°C



	VES 390/WP/E		VES 390/WP/RM
	VES 390/WP/EL		VES 390/WP/RML
	VES 390/WP/ER		VES 390/WP/RMR

MODEL	VES 390/WP
DIMENSION (mm)	(L)392 x (W)189 x (H)66
LAMP	LED 2835 (4 PCS)

EMERGENCY CONVERSION KIT FOR T8 LED TUBE AND LED MODULE

- Features:**
- Low Profile EG Steel Casing
 - Suitable For LED Module With External Driver or T8 LED Tube With Built-In Driver
 - Maintain and Non-Maintain Operation
 - Deep Discharge Protection
 - Constant Power Output

Usage Application:
(DC) LED Module with External Driver
(AC) LED T8 Tube with Built-In Driver
(AC) LED A Bulb
(AC) LED T Stick
(AC) LED GU10

Lamp Specification:

Brand: YLI
Emergency Duration: 3 Hours

Mode Of Operation:
Maintained
Non-Maintained

Warranty: 1 year

Recharge Period: 15 Hours
Battery: LiFePO₄ 6.4V/3.3Ah/26650/S


IP Rating: IP 20
Main Supply: 220 – 240V 50/60Hz

Max. Operating Temperature:
40°C




MODEL	VEL 120/ECK
PCB DIMENSION (mm)	(L)189 x (W)29 x (H)225
BATTERY DIMENSION (mm)	(L)189 x (D)26.5

VEL 120/ECK USED WITH T8 LED TUBE WITH BUILT-IN DRIVER

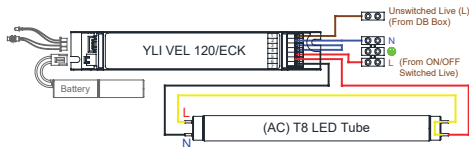

VEL 120/ECK USED WITH LED MODULE WITH EXTERNAL DRIVER

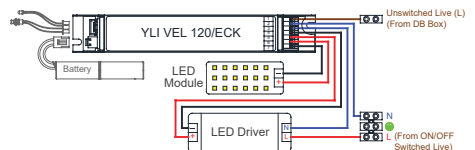



PT. YLI INDUSTRY INDONESIA

JAKARTA, Java (HQ)

PERGUDANGAN CENTRAL CAKUNG BLOK J3 NO.26 JL. RAYA CAKUNG CILINCING KM.3 14140,
JAKARTA UTARA, INDONESIA

TEL: +62-21 2244 8227 FAX: +62-21 2244 8237 EMAIL: yli-jakarta@yli-ind.com.my

MEDAN, Sumatera

KOMPLEK PERGUDANGAN MMTc LOGISTIC BLOK D NO.30 JL. KOLAM/TERATAI,
MEDAN ESTATE, PERCUT SEI TUAN, DELI SERDANG,SUMATERA UTARA, INDONESIA

TEL: +62-81 1830 1227 EMAIL: yli-medan@yli-ind.com.my

MAKASSAR, Sulawesi

PERGUDANGAN NATURA CLUSTER BLOK C NO.20,JL.IR.SUTAMI,BIRA,TAMALANREA
90244, KOTA MAKASSAR

TEL: +62-81 1400 8227 EMAIL: yli-makassar@yli-ind.com.my

SURABAYA, Java

PERGUDANGAN AKSES KEBOMAS BLOK F-12, JL. MAYJEND SUNGKONO NO. 38 KEL.
SEKARKURUNG KEC. KEBOMAS KOTA GRESIK PROVINSI JAWA TIMUR 61124 SURABAYA

TEL: +62-31 3992 9227 EMAIL: yli-surabaya@yli-ind.com.my

