

YLI

Ultimate Lighting Experience

YLI INDUSTRY SDN.BHD

M&E PRODUCT BROCHURE 2024-2025




SIRIM





MANUFACTURING MACHINES



Powder Coating System



CNC Panel Bender



Robotic Spot Welding Machine



CNC Vertical Machining Center



Stamping Machine



Verticle Machining Center



Turret Punch Press



Automated Connector Assembly System



CNC Lathe



Laser Cutting Machine



Cable Cutting and Stripping Machine



Multifunctional Loading Robot



CNC Wire Cut Machine



CNC Die-Sinking EDM



360 Ton Plastic Injection Moulding Machine



800 Ton Plastic Injection Moulding Machine

ABOUT US

YLI Industry Sdn. Bhd. (504654-U) is Southeast Asia's leading LED luminaire manufacturer and supplier. Established in 1993, we have diligently strived to provide high-quality lighting and related products to the global market, garnering a stellar reputation and establishing ourselves as an enduring brand.


Our production facility spans 7 acres in Pusing, Perak, Malaysia, ensuring the meticulous production of our high-quality products, which have been certified to meet the ISO9001:2015 standards by the International Organization for Standardization. Additionally, we hold official accreditation from the Malaysian government and gained recognition from numerous countries, facilitating the widespread distribution of our products to over 30 countries worldwide.

Despite successful penetration into the international market and becoming a manufacturer with a solid foundation, we will maintain strong R&D capabilities and continue to supply exceptional lighting fixtures and related products to the international, maintaining a leading position in the industry.

RESEARCH & DEVELOPMENT INSTRUMENT



Stereolithography (SLA) 3D Printer

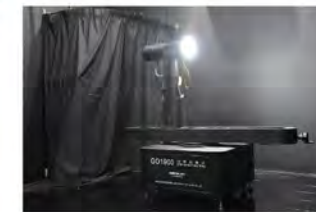

High Accuracy Goniophotometer



Dust-proof Test Chamber



IPX3 & IPX4 Swing Pipe Water Spray Test



IPX5 & IPX6 Waterproof Jet Test Device



IPX7 & IPX8 Immersion tank Waterproof Test Device



Spectroradiometer Integrating Sphere System

INDOOR

RECESSED ROUND & SQUARE LED DOWNLIGHT - OS 02 SERIES

Features:

- Die Cast Aluminium Rim & Housing
- Polycarbonate Opal Diffuser
- Electrostatically Polyester Powder Coated
- Safety Hanging Spring
- Separate Mild Steel Gear Box
- Nylon Connecting Device

Lamp Specification:

Brand: YLI / TRIDONIC
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 3 years
Beam Angle°: >110°


Efficacy (lm/W): >100
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20



Mounting Type:
Recessed Ceiling

Classification:
Class I

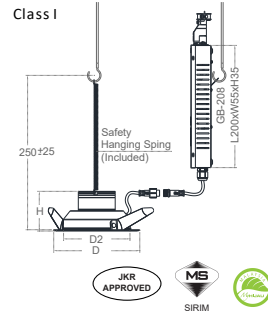

MODEL	OS 402	OS 602	OS 702	OS 802
DIMENSION (mm)	(D)140 x (D2)108 x (H)65	(D)170 x (D2)134 x (H)65	(D)190 x (D2)154 x (H)64	(D)215 x (D2)175 x (H)64
HOLE CUT (mm)	D120	D150	D170	D190
WATTAGE	10.5w	15w	19w	19w
LUMEN	1100lm	1700lm	2300lm	2300lm
MODEL	OS 902	OS SQ302	OS SQ402	OS SQ602
DIMENSION (mm)	(D)240 x (D2)190 x (H)64	(L)110° x (L2)78° x (H)65	(L)140° x (L2)104° x (H)65	(L)170° x (L2)130° x (H)65
HOLE CUT (mm)	D210	99°	125°	150°
WATTAGE	19w	10.5w	15w	19w
LUMEN	2300lm	900lm	1400lm	1900lm

SURFACE ROUND & SQUARE LED DOWNLIGHT - OS SS & SR 04 SERIES

Features:

- Polycarbonate Surface Housing
- Polycarbonate Opal Diffuser
- Mild Steel Inner Plate
- Electrostatically Polyester Powder Coated
- Nylon Connecting Device

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs


CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 2 years
Beam Angle(°): >120°


Efficacy (lm/W): >100
CRI (Ra): >80

Power Factor: >0.5/0.9
IP Rating: IP 20

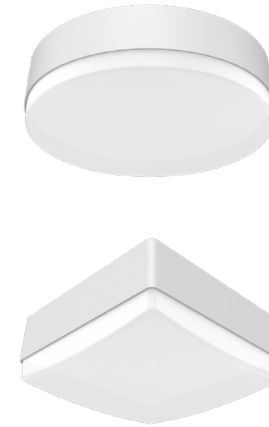

Mounting Type:
Surface Ceiling

Classification:
Class II

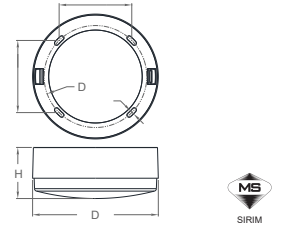

MODEL	OS SR 404	OS SR 604	OS SR 804
DIMENSION (mm)	(D)142 x (H)58	(D)172 x (H)58	(D)191 x (H)58
WATTAGE	11w	15w	20w
LUMEN	1200lm	1600lm	2200lm
MODEL	OS SS 404	OS SS 604	OS SS 804
DIMENSION (mm)	(L)133° x (H)58	(L)162° x (H)58	(L)182° x (H)58
WATTAGE	11w	15w	20w
LUMEN	1100lm	1600lm	2200lm

T8 LED BATTEN FITTING - OS YBC SERIES

Features:

- T0.5mm Mild Steel Housing
- Electrostatically Polyester Powder Coated
- G13 Polycarbonate & Bronze Lampholder
- Compatible with Powerpack
- Nylon Connecting Device

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 3 years
Beam Angle°: >150°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20



Mounting Type:
Surface Ceiling / Wall / Suspension

Classification:
Class I



MODEL	OS YBC 1x600mm	OS YBC 2x600mm	OS YBC 1x1200mm	OS YBC 2x1200mm
DIMENSION (mm)	(L)612 x (W)52 x (H)77	(L)612 x (W)88 x (H)75	(L)1222 x (W)52 x (H)77	(L)1222 x (W)88 x (H)75
WATTAGE	1 x 8w	2 x 8w	1 x 14w	2 x 14w
LUMEN	1100lm	2200lm	2100lm	4200lm

T8 LED WIRE GUARD FITTING - OS YWG SERIES

Features:

- T0.5mm Mild Steel Housing
- T0.7mm Mild Steel Wire Guard
- Electrostatically Polyester Powder Coated
- G13 Polycarbonate & Bronze Lampholder
- Nylon Connecting Device

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs


CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 3 years
Beam Angle (°): >150°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20

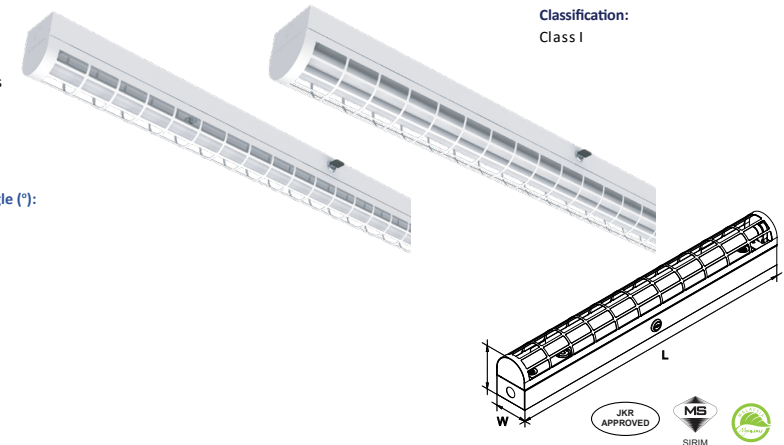

Mounting Type:
Surface Ceiling / Wall / Suspension

Classification:
Class I



MODEL	OS YWG 1x600mm	OS YWG 2x600mm	OS YWG 1x1200mm	OS YWG 2x1200mm
DIMENSION (mm)	(L)612 x (W)68 x (H)92	(L)612 x (W)100 x (H)106	(L)1222 x (W)68 x (H)92	(L)1222 x (W)100 x (H)106
WATTAGE	1 x 8w	2 x 8w	1 x 14w	2 x 14w
LUMEN	1100lm	2200lm	2100lm	4200lm

INDOOR

T8 LED SQUARE DAIKON DIFFUSER FITTING - OS SQ SERIES

Features:

- **T 0.3mm** Mild Steel Housing
- Stove-Coated With High Reflectivity White Epoxy
- Polysterene Semi-Opal Linear Diffuser
- **G13** Polycarbonate & Bronze Lampholder
- Nylon Connecting Device

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)


Warranty: 3 years
Beam Angle (°): >130°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20

Mounting Type:
Surface Ceiling / Wall /
Suspension

Classification:
Class I

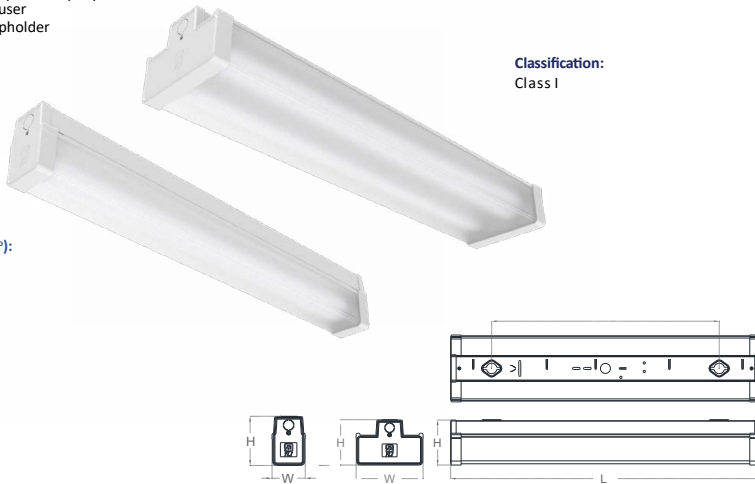

MODEL	OS SQ 1x600mm/SOL	OS SQ 2x600mm/SOL	OS SQ 1x1200mm/SOL	OS SQ 2x1200mm/SOL
DIMENSION (mm)	(L)622 x (W)61 x (H)91	(L)622 x (W)135 x (H)92	(L)1232 x (W)61 x (H)91	(L)1232 x (W)135 x (H)92
WATTAGE	1 x 8w	2 x 8w	1 x 14w	2 x 14w
LUMEN	1100lm	2200lm	2100lm	4200lm

LED REEDED DIFFUSER BATTEN FITTING - OS D SERIES

Features:

- **T0.5mm** Housing is Fabricated From Mild Steel
- Electrostatically Polyester Powder Coated
- Inner Base is Extruded From Aluminium
- Polycarbonate Reeded Diffuser - **Opal & Linear**
- Nylon Connecting Device

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)


Warranty: 3 years
Beam Angle° >130°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20 for Housing
IP 54 for LED

Mounting Type:
Surface Ceiling / Wall

Classification:
Class I

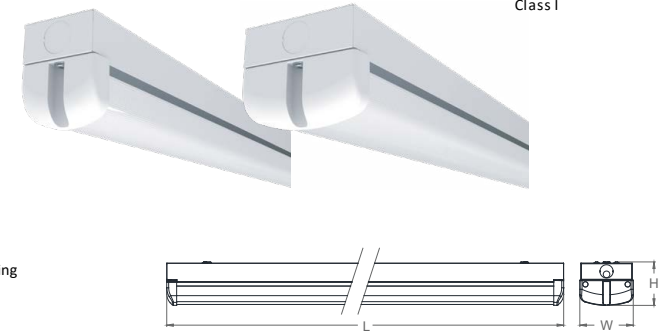

MODEL	OS D2-1/OL	OS D2-2/OL	OS D4-1/OL	OS D4-2/OL
DIMENSION (mm)	(L)600 x (W)53 x (H)66	(L)600 x (W)81 x (H)66	(L)1160 x (W)53 x (H)66	(L)1160 x (W)81 x (H)66
WATTAGE	18w	31w	31w	62w
LUMEN	1760lm	3520lm	3520lm	7040lm

T8 LED TRIANGLE HINGED DIFFUSER & MIRROR LOUVER FITTING - OS TRA SERIES

Features:

- **T0.5mm** Mild Steel Housing
- Hinged Frame of Mild Steel in White Epoxy
- AA12 Prismatic Diffuser
- Finished With Powder Electrostatically
- **G13** Polycarbonate & Bronze Lampholder
- Pre-Connected With 105°C HR PVC Wire

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle° >180°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20

Mounting Type:
Surface Ceiling / Wall

Classification:
Class I



MODEL	OS TRA 3x600mm/PT	OS TRA 3x1200mm/PT
DIMENSION (mm)	(L)650 x (L2)500	(L)1260 x (L2)1110
WATTAGE	3 x 8w	3 x 14w
LUMEN	3300lm	6300lm

LED LINEAR FITTING - OS TD FT SERIES

Features:

- Extruded Aluminium Housing
- Polycarbonate End Cap
- Inner Base is Extruded From Aluminium
- Polycarbonate Diffuser (Opal & Linear)

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)


Warranty: 2 years
Beam Angle° >110°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.5
IP Rating: IP 54

Mounting Type:
Surface Ceiling / Suspension
/ Recessed Plaster Ceiling

Classification:
Class I

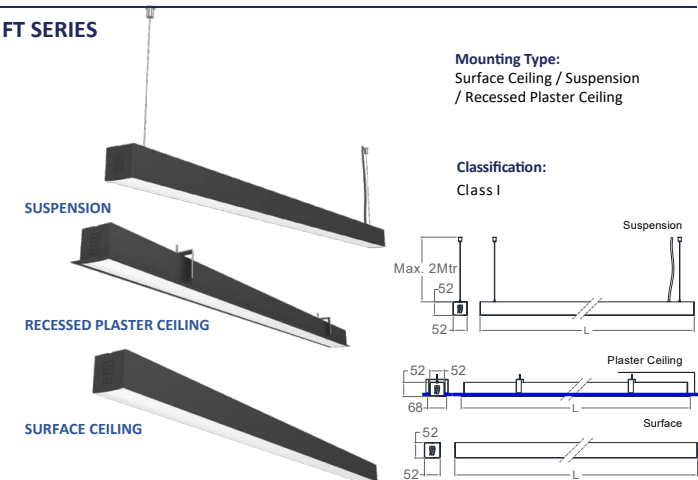

MODEL	OS TD-2/**-FT	OS TD-4/**-FT	OS TD-6/**-FT	OS TD-8/**-FT
WATTAGE	13w	25w	38w	50w
LUMEN	1500lm	3000lm	4500lm	6000lm
MOUNTING TYPE	SUSPENSION (SP)	OS TD-4/SP-FT	OS TD-6/SP-FT	OS TD-8/SP-FT
	SURFACE CEILING (S)	OS TD-2/S-FT	OS TD-4/S-FT	OS TD-6/S-FT
	R.PLASTER CEILING (RP)	OS TD-2/RP-FT	OS TD-4/RP-FT	OS TD-6/RP-FT
DIMENSION	(L)580	(L)1150	(L)1705	(L)2270
CUT OUT SIZE (RP)	582 x 60	1152 x 60	1712 x 60	2272 x 60

INDOOR

LED PANEL LIGHT TYPE VERTICAL - OS PV SERIES

Features:

- **T0.5mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- Polycarbonate Opal Diffuser

Lamp Specification:

Brand: YLI / TRIDONIC
Lifetime: 50,000 hrs

CCT:

Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty:


3 years

Efficacy (lm/W): >110

IP Rating: IP 20

Optional Add-on :

PRF : Aluminium Recessed Frame For Plaster Ceiling
 ASF: Aluminium Surface Frame For Surface Ceiling
 SP: Suspension Kit For Pendant Mounted

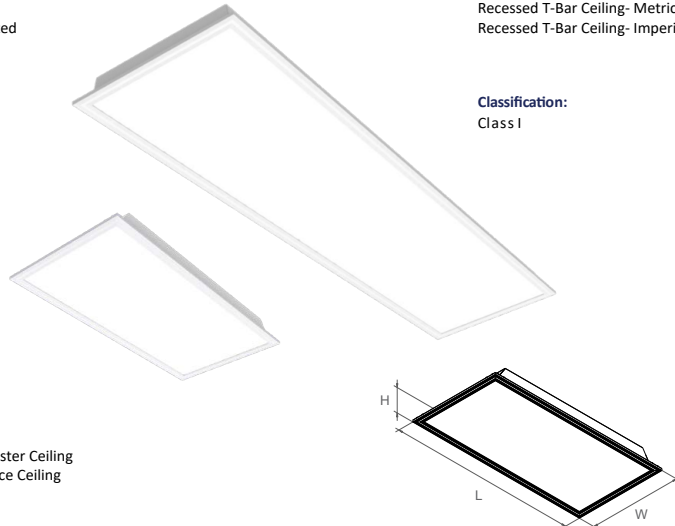

Mounting Type:
 Recessed T-Bar Ceiling- Metric Size /
 Recessed T-Bar Ceiling- Imperial Size

Classification:
 Class I

MODEL	OS PV12/R OR R-MM	OS PV14/R OR R-MM	OS PV22/R OR R-MM	OS PV24/R OR R-MM
DIMENSION (mm)Imperial (R)	(L)605 x (W)302 x (H)54	(L)1215 x (W)302 x (H)54	(L)605 x (W)605 x (H)54	(L)1215 x (W)605 x (H)54
DIMENSION (mm)Metric (R-MM)	(L)595 x (W)295 x (H)54	(L)1195 x (W)295 x (H)54	(L)595 x (W)595 x (H)54	(L)1195 x (W)595 x (H)54
WATTAGE	18w	35w	35w	70w
LUMEN	2000lm	4000lm	4400lm	8800lm

LED PANEL LIGHT TYPE VERTICAL - OS PV SERIES - RECESSED PLASTER / SURFACE / SUSPENSION



PRF - Aluminium Plaster Recessed Frame For Recessed Plaster Ceiling Mounted

MODEL	OS PV12/RP	OS PV22/RP	OS PV14/RP	OS PV24/RP
DIMENSION (mm)	(L)630 x (W)330 x (H)54	(L)630 x (W)630 x (H)54	(L)1230 x (W)330 x (H)54	(L)1230 x (W)630 x (H)54
CUT OUT SIZE (mm)	630 x 310	610 x 610	1210 x 310	1210 x 310

ASF - Aluminium Surface For Surface Ceiling Mounted

MODEL	OS PV12/S	OS PV22/S	OS PV14/S	OS PV24/S
DIMENSION (mm)	(L)604 x (W)313 x (H)70	(L)604 x (W)613 x (H)70	(L)1204 x (W)313 x (H)70	(L)1204 x (W)613 x (H)70
CUT OUT SIZE (mm)	SURFACE	SURFACE	SURFACE	SURFACE

Suspension Kit For Pendant Mounted

MODEL	OS PV12/SP	OS PV22/SP	OS PV14/SP	OS PV24/SP
DIMENSION (mm)	(L)595 x (W)297 x (H)54	(L)595 x (W)595 x (H)54	(L)1195 x (W)297 x (H)54	(L)1195 x (W)595 x (H)54
LENGHT	750	750	750	750

T8 LED MIRROR LOUVER FITTING TYPE R & R-MM RECESSED T-BAR CEILING - OS YML SERIES

Features:

- **T0.5mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Anodized Aluminium Reflector Louver
- Nylon Connecting Device

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:


Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty:

3 years

Efficacy (lm/W): >135

IP Rating: IP 20

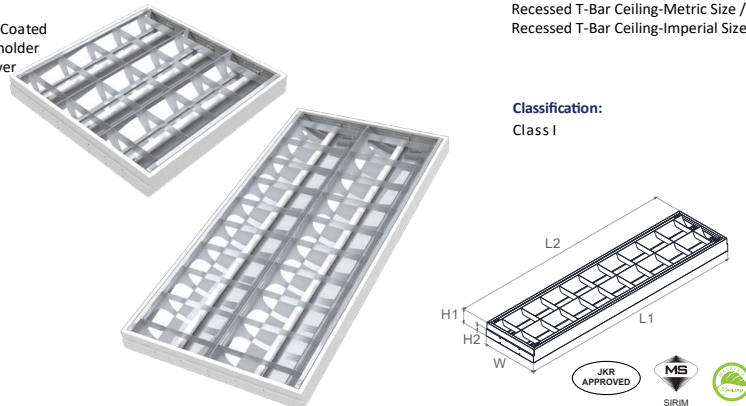

Mounting Type:
 Recessed T-Bar Ceiling-Metric Size /
 Recessed T-Bar Ceiling-Imperial Size

Classification:
 Class I

MODEL	OS YML 2212/R OR /R-MM	OS YML 2222/R OR /R-MM	OS YML 3222/R OR /R-MM	OS YML 4222/R OR /R-MM
DIMENSION (mm)Imperial (R)	(L1)613 x (L2)603 x (W)298 x (H)37	(L1)613 x (L2)603 x (W)603 x (H)70 x (H2)37	(L1)613 x (L2)603 x (W)603 x (H)70 x (H2)37	(L1)613 x (L2)603 x (W)603 x (H1)70 x (H2)37
DIMENSION (mm)Metric (R-MM)	(L1)613 x (L2)595 x (W)295 x (H)75	(L1)613 x (L2)595 x (W)595 x (H)75	(L1)613 x (L2)595 x (W)595 x (H)75	(L1)613 x (L2)595 x (W)595 x (H)75
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm

MODEL	OS YML 2414/R OR /R-MM	OS YML 2424/R OR /R-MM	OS YML 3424/R OR /R-MM	OS YML 4424/R OR /R-MM
DIMENSION (mm)Imperial (R)	(L1)1223 x (L2)1213 x (W)298 x (H)35	(L1)1223 x (L2)1213 x (W)603 x (H)35	(L1)1223 x (L2)1213 x (W)603 x (H)35	(L1)1223 x (L2)1213 x (W)603 x (H)35
DIMENSION (mm)Metric (R-MM)	(L1)1223 x (L2)1195 x (W)295 x (H)75	(L1)1223 x (L2)1195 x (W)595 x (H)75	(L1)1223 x (L2)1195 x (W)595 x (H)75	(L1)1223 x (L2)1195 x (W)595 x (H)75
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

T8 LED MIRROR LOUVER FITTING TYPE S SURFACE CEILING - OS YML SERIES

Features:

- **T0.5mm** Mild Steel Housing
- Electrostatically Polyester Powder Coated
- **G13** Polycarbonate & Bronze Lampholder
- Anodized Aluminium Reflector Louver
- Nylon Connecting Device

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs


CCT:

Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 3 years

Efficacy (lm/W): >135

IP Rating: IP 20

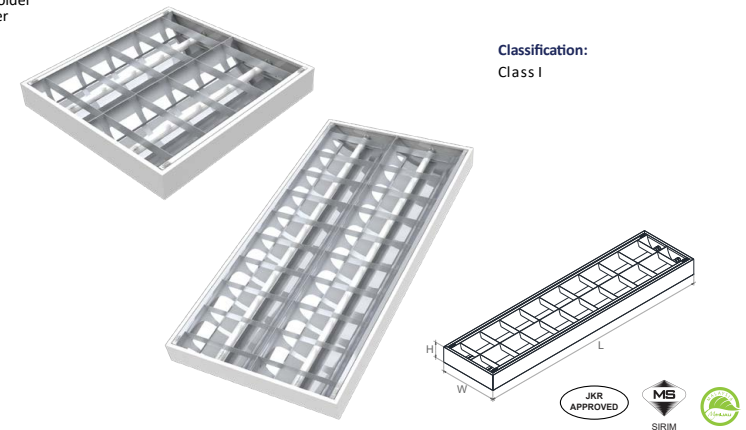

Mounting Type:
 Surface Ceiling

Classification:
 Class I

MODEL	OS YML 2212/S	OS YML 2222/S	OS YML 3222/S	OS YML 4222/S
DIMENSION (mm)	(L)614 x (W)300 x (H)80	(L)614 x (W)604 x (H)80	(L)614 x (W)604 x (H)80	(L)614 x (W)604 x (H)80
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm

MODEL	OS YML 2414/S	OS YML 2424/S	OS YML 3424/S	OS YML 4424/S
DIMENSION (mm)	(L)1223 x (W)300 x (H)80	(L)1223 x (W)604 x (H)80	(L)1223 x (W)604 x (H)80	(L)1223 x (W)604 x (H)80
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

INDOOR

T8 LED MIRROR LOUVER FITTING TYPE RP RECESSED PLASTER CEILING - OS YML SERIES

- Features:**
- **T0.5mm** Mild Steel Housing
 - Electrostatically Polyester Powder Coated
 - **G13** Polycarbonate & Bronze Lampholder
 - Anodized Aluminium Reflector Louver
 - Nylon Connecting Device


Lamp Specification:
Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 3 years
Beam Angle(°): >100°

Efficacy (lm/W): >135
CRI (Ra): >80

Power Factor: >0.9
IP Rating: IP 20

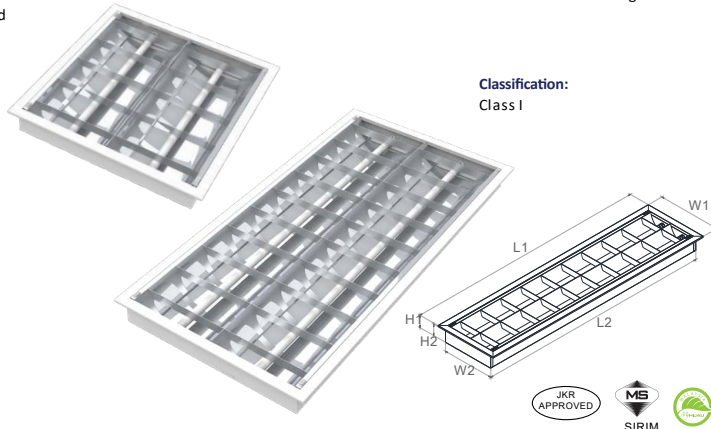

Mounting Type:
 Recessed Plaster Ceiling

Classification:
 Class I

MODEL	OS YML 2212/RP	OS YML 2222/RP	OS YML 3222/RP	OS YML 4222/RP
DIMENSION (mm)	(L1)645 x (L2)614 x (W)328 x (W2)270 x (H)82	(L1)645 x (L2)614 x (W)638 x (W2)580 x (H)82	(L1)645 x (L2)614 x (W)638 x (W2)580 x (H)82	(L1)645 x (L2)614 x (W)638 x (W2)580 x (H)82
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm
MODEL	OS YML 2414/RP	OS YML 2424/RP	OS YML 3424/RP	OS YML 4424/RP
DIMENSION (mm)	(L1)1255 x (L2)1224 x (W)328 x (W2)270 x (H)82	(L1)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82	(L1)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82	(L1)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

T8 LED HINGED DIFFUSER FITTING TYPE R & R-MM RECESSED T-BAR CEILING - IMPERIAL / METRIC SIZE - OS YHD SERIES

- Features:**
- **T0.5mm** Mild Steel Housing
 - Finished With Powder Electrostatically
 - Stove-Coated With High Reflectivity White Epoxy
 - **G13** Lampholder of Polycarbonate & Bronze
 - Nylon Connecting Device

Lamp Specification:
Brand: TOSHIBA
Lifetime: 50,000hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 3 years
Beam Angle(°): >70°

Efficacy (lm/W): >135
CRI (Ra): >80

Power Factor: >0.9
IP Rating: IP 20
 IP 40 & IP 54 Available on Request



Mounting Type:
 Recessed T-Bar Ceiling-Metric Size /
 Recessed T-Bar Ceiling-Imperial Size

Classification:
 Class I

Diffuser Pattern:
 AA12 Prismatic
 Acrylic Clear
 PS-12 Opal

MODEL	OS YHD 2212/R OR /R-MM	OS YHD 2222/R OR /R-MM	OS YHD 3222/R OR /R-MM	OS YHD 4222/R OR /R-MM
DIMENSION (mm)Imperial (R)	(L)613 x (L2)603 x (W)298 x (H)75	(L)613 x (L2)603 x (W)603 x (H)75	(L)613 x (L2)603 x (W)603 x (H)75	(L)613 x (L2)603 x (W)603 x (H)75
DIMENSION (mm)Metric (R-MM)	(L)613 x (L2)595 x (W)295 x (H)75	(L)613 x (L2)595 x (W)595 x (H)75	(L)613 x (L2)595 x (W)595 x (H)75	(L)613 x (L2)595 x (W)595 x (H)75
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm
MODEL	OS YHD 2414/R OR /R-MM	OS YHD 2424/R OR /R-MM	OS YHD 3424/R OR /R-MM	OS YHD 4424/R OR /R-MM
DIMENSION (mm)Imperial (R)	(L)1213 x (L2)1213 x (W)298 x (H)75	(L)1223 x (L2)1213 x (W)603 x (H)75	(L)1223 x (L2)1213 x (W)603 x (H)75	(L)1223 x (L2)1213 x (W)603 x (H)75
DIMENSION (mm)Metric (R-MM)	(L)1223 x (L2)1195 x (W)295 x (H)75	(L)1223 x (L2)1195 x (W)595 x (H)75	(L)1223 x (L2)1195 x (W)595 x (H)75	(L)1223 x (L2)1195 x (W)595 x (H)75
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

T8 LED HINGED DIFFUSER FITTING TYPE S SURFACE CEILING MOUNTED - OS YHD SERIES

- Features:**
- **T0.5mm** Mild Steel Housing
 - Finished With Powder Electrostatic
 - Stove-Coated With High Reflectivity White Epoxy
 - **G13** Polycarbonate & Bronze Lampholder
 - Nylon Connecting Devices


Lamp Specification:
Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 3 years
Beam Angle(°): >100°

Efficacy (lm/W): >135
CRI (Ra): >80

Power Factor: >0.9
IP Rating: IP 20
 IP 40 & IP 54 Available on Request

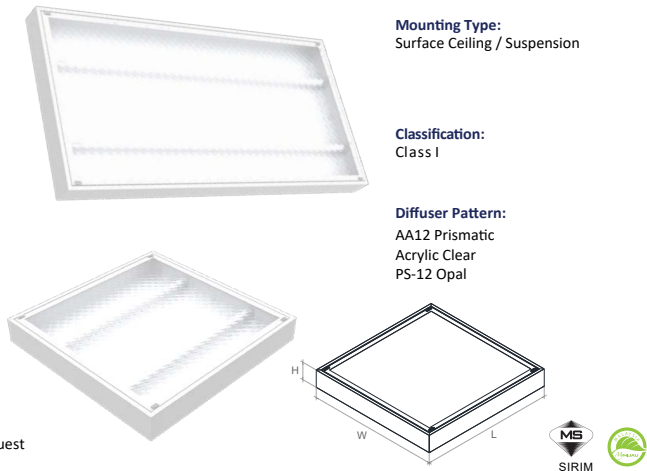

Mounting Type:
 Surface Ceiling / Suspension

Classification:
 Class I

Diffuser Pattern:
 AA12 Prismatic
 Acrylic Clear
 PS-12 Opal

MODEL	OS YHD 2212/S	OS YHD 2222/S	OS YHD 3222/S	OS YHD 4222/S
DIMENSION (mm)	(L)613 x (W)300 x (H)80	(L)613 x (W)603 x (H)80	(L)613 x (W)603 x (H)80	(L)613 x (W)603 x (H)80
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm
MODEL	OS YHD 2414/S	OS YHD 2424/S	OS YHD 3424/S	OS YHD 4424/S
DIMENSION (mm)	(L)1223 x (W)300 x (H)80	(L)1223 x (W)603 x (H)80	(L)1223 x (W)603 x (H)80	(L)1223 x (W)603 x (H)80
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

T8 LED HINGED DIFFUSER FITTING TYPE RP RECESSED PLASTER CEILING - OS YHD SERIES

- Features:**
- **T0.5mm** Mild Steel Housing
 - Finished With Powder Electrostatically
 - Stove-Coated With High Reflectivity White Epoxy
 - **G13** Lampholder of Polycarbonate & Bronze
 - Nylon Connecting Device

Lamp Specification:
Brand: TOSHIBA
Lifetime: 50,000 hrs

CCT:
 Warm White (3000K);
 Cool White (4000K);
 Daylight (6500K)

Warranty: 3 years
Beam Angle° >100°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 20
 IP 40 & IP 54 Available on Request



Mounting Type:
 Recessed Plaster Ceiling

Classification:
 Class I

Diffuser Pattern:
 AA12 Prismatic
 Acrylic Clear
 PS-12 Opal

MODEL	OS YHD 2212/RP	OS YHD 2222/RP	OS YHD 3222/RP	OS YHD 4222/RP
DIMENSION (mm)	(L)645 x (L2)614 x (W)328 x (W2)270 x (H)82	(L)645 x (L2)614 x (W)638 x (W2)580 x (H)82	(L)645 x (L2)614 x (W) 638 x (W2)580 x (H)82	(L)645 x (L2)614 x (W)638 x (W2)58 x (H)820
WATTAGE	2 x 8w	2 x 8w	3 x 8w	4 x 8w
LUMEN	2200lm	2200lm	3300lm	4400lm
MODEL	OS YHD 2414/RP	OS YHD 2424/RP	OS YHD 3424/RP-LED	OS YHD 4424/RP
DIMENSION (mm)	(L)1255 x (L2)1224 x (W)328 x (W2)270 x (H)82	(L)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82	(L)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82	(L)1255 x (L2)1224 x (W)638 x (W2)580 x (H)82
WATTAGE	2 x 14w	2 x 14w	3 x 14w	4 x 14w
LUMEN	4200lm	4200lm	6300lm	8400lm

OUTDOOR

T8 LED WEATHERPROOF FITTING - OS YWP SERIES

Features:

- Grey PC Base and Linear PC Diffuser (V-2)
- Sealed with Silicone Gasket
- Snap-on with Stainless Steel Clips
- **G13** Polycarbonate & Bronze Lampholder

Lamp Specification:

Brand: TOSHIBA
Lifetime: 50,000 hrs


CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 3 years
Beam Angle (°): >130°

Efficacy (lm/W): >135
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 65

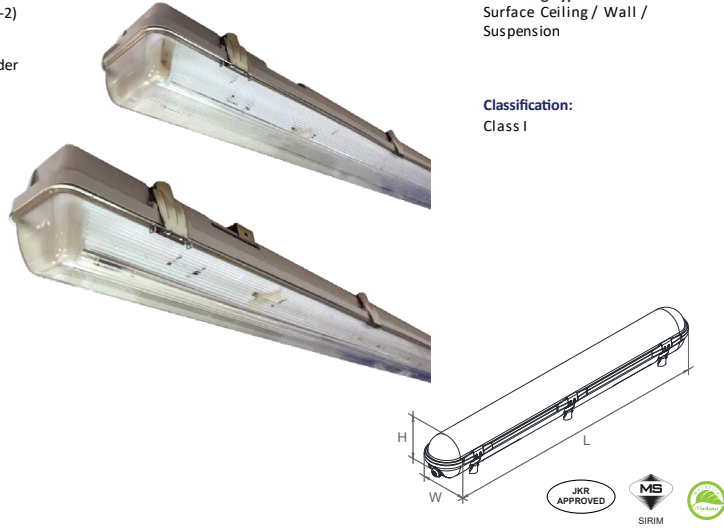

Mounting Type:
Surface Ceiling / Wall /
Suspension

Classification:
Class I



MODEL	OS YWP 1 x 600mm	OS YWP 2 x 600mm	OS YWP 1 x 1200mm	OS YWP 2 x 1200mm
DIMENSION (mm)	(L)652x (W)66 x (H)80	(L)652 x (W)100 x (H)80	(L)1260 x (W)66 x (H)80	(L)1260 x (W)100 x (H)80
WATTAGE	1 x 8w	2 x 8w	1 x 14w	2 x 14w
LUMEN	1100lm	2200lm	2100lm	4200lm

RECESSED LED WALL LIGHT - VIP WL 80/R SERIES

Features:

- Die Cast Aluminium Frame & Housing
- Electrostatically Polyester Powder Coated
- Frosted Glass Diffuser
- Sealed With Silicone Gasket
- Nylon Connecting Device

Lamp Specification:

Brand: YLI
Lifetime: 30,000 hrs


CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6000K)

Warranty: 1 year
Beam Angle° >100°

Efficacy (lm/W): >100
CRI(Ra): >80

Power Factor: >0.5
IP Rating: IP 65

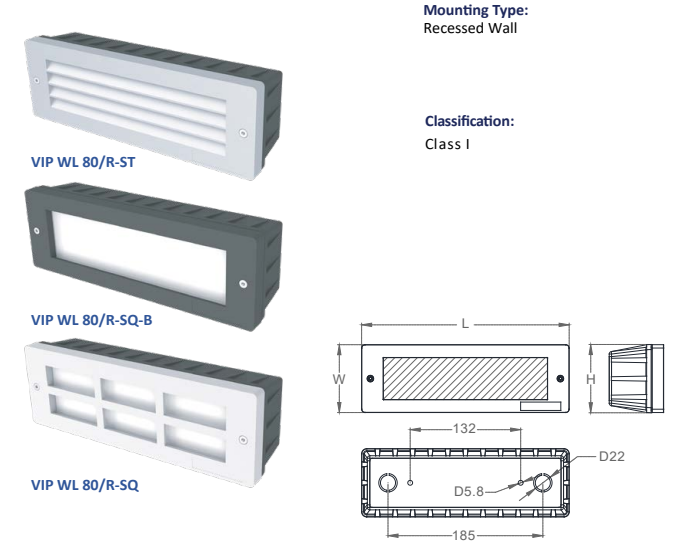

Mounting Type:
Recessed Wall

Classification:
Class I

MODEL	VIP WL 80/R-SQ-B	VIP WL 80/R-SQ	VIP WL 80/R-ST
DIMENSION (mm)	(L)248x (W)81 x (H)65	(L)248 x (W)81 x (H)65	(L)248 x (W)81 x (H)65
WATTAGE	8w	8w	8w
LUMEN	300lm	200lm	40lm

SURFACE LED WALL LIGHT - OS WL 270 / 360 SERIES

Features:

- Base is Die Casted From Aluminium Alloy
- Finished With Powder Electrostatic
- Acrylic Opal Diffuser
- Sealed With Silicone Gasket

Lamp Specification:

Brand: YLI
Lifetime: 30,000hrs

CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6000K)

Warranty: 1 year
Beam Angle(°) >110°

Efficacy (lm/W): >62.5
CRI (Ra): >80

Power Factor: >0.5
IP Rating: IP 65



Mounting Type:
Surface Wall

Classification:
Class I

MODEL	OS WL 270/S-R1	OS WL 270/S-R2	OS WL 270/S-R3	OS WL 270/S-R4	OS WL 360/S-RD
DIMENSION (mm)	(D)270 x (H)97	(D)270 x (H)100	(D)270 x (H)115	(D)270 x (H)115	(D)365 x (H)132
WATTAGE	16w	16w	16w	16w	24w
LUMEN	1000lm	600lm	950lm	900lm	1300lm

SURFACE LED WALL LIGHT - VIP WL 006/SQ SERIES

Features:

- Die Cast Aluminium Housing
- Mild Steel Inner Base Plate
- Electrostatically Powder Coated
- Acrylic Linear Diffuser
- Nylon Connecting Devices

Lamp Specification:

Brand: YLI
Lifetime: 30,000 hrs


CCT:

Warm White (3000K);
Cool White (4000K);
Daylight (6500K)

Warranty: 1 year
Beam Angle (°): > 135°

Efficacy (lm/W): >100
CRI(Ra): >80

Power Factor: >0.5
IP Rating: IP 65

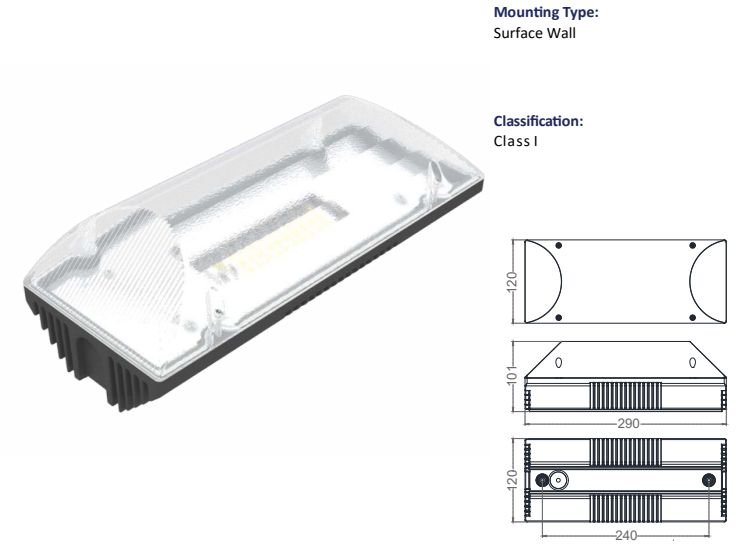

Mounting Type:
Surface Wall

Classification:
Class I

MODEL	VIP WL 006/S-SQ
DIMENSION (mm)	As Shown
WATTAGE	8w
LUMEN	900lm

OUTDOOR

LED UFO HIGH BAY LIGHT - OS UFO SERIES

- Features:**
- Die Cast Aluminium Housing
 - Mild Steel Mounting Bracket
 - Electrostatically Polyester Powder Coated
 - Anodized Aluminium Reflector (Optional)

Lamp Specification:

Brand: YLI / SOSEN
Lifetime: 50,000 hrs

CCT: Cool White (4000K); Daylight (6000K)

Warranty: 3 years
Beam Angle°: 60° / 90°


Efficacy (lm/W): >100
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 65



Mounting Type: Suspension

Classification: Class I

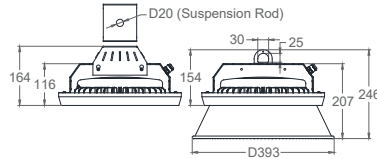

MODEL	OS UFO 340-100W-60D	OS UFO 340-125W-60D	OS UFO 340-150W-60D	OS UFO 340-200W-60D
DIMENSION (mm)	As Shown	As Shown	As Shown	As Shown
WATTAGE	100w	125w	150w	200w
LUMEN	14000lm	16000lm	18500lm	22000lm

MODEL	OS UFO 340-100W-90D	OS UFO 340-125W-90D	OS UFO 340-150W-90D	OS UFO 340-200W-90D
DIMENSION (mm)	As Shown	As Shown	As Shown	As Shown
WATTAGE	100w	125w	150w	200w
LUMEN	14000lm	17000lm	19000lm	22500lm

LED UFO HIGH BAY LIGHT - OS UFO SWP SERIES

- Features:**
- Die Cast Aluminium Housing
 - Polycarbonate Diffuser Lens
 - Nickel Plating Lifting Eye Bolt
 - Pre Connecting With 105°C HR PVC Cable

Lamp Specification:

Brand: YLI / SOSEN
Lifetime: 50,000 hrs

CCT: Cool White (4000K); Daylight (5000K) / (5700K)

Warranty: 3 years
Beam Angle(°): >60° / 90° / 120°


Efficacy (lm/W): >100
CRI (Ra): >70

Power Factor: >0.9
IP Rating: IP 65



Mounting Type: Suspension

Classification: Class I



MODEL	OS UFO-SWP-240W	OS UFO-SWP-300W	OS UFO-SWP-400W
DIMENSION (mm)	(D)400 x (H)147	(D)400 x (H)147	(D)490 x (H)171
WATTAGE	240w	300w	400w
LUMEN	42000lm	52000lm	70000lm

LED HIGH BAY LIGHT - OS HB SERIES

- Features:**
- Mild Steel Housing & Bracket
 - Built-In Gear Chamber
 - Connected With 105°C HR PVC Cable
 - Nylon Connecting Devices

Lamp Specification:

Brand: OSRAM / SOSEN
Lifetime: 50,000 hrs

CCT: Warm White (3000K); Cool White (4000K); Daylight (6500K)

Warranty: 3 years
Beam Angle(°): L60 x 60 / L100 x 100


Efficacy (lm/W): >100
CRI (Ra): >70

Power Factor: >0.9
IP Rating: IP 20



Mounting Type: Surface / Suspension

Classification: Class I

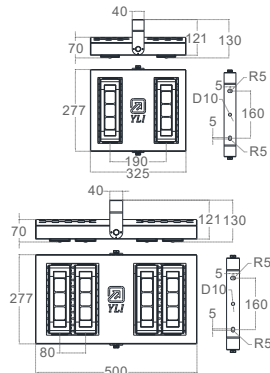

MODEL	OS HB-2 (Mild Steel)	OS HB-4 (Mild Steel)
DIMENSION (mm)	(L)325 x (L2)277 x (H)70	(L)500 x (L2)277 x (H)70
WATTAGE	75w / 100w	150w / 200w
LUMEN	9000lm / 11600lm	18000lm / 23200lm

LED FLOOD LIGHTS - OS FL SERIES (ALUMINIUM)

- Features:**
- Aluminium Housing & Bracket
 - Built-In Gear Chamber
 - Pre Connected With 105°C HR PVC Cable
 - Electrostatically Powder Coated
 - Symmetry (L60 x 60 / L100 x 100) / Asymmetry (L100 x 60)

Lamp Specification:

Brand: OSRAM / SOSEN
Lifetime: 50,000hrs

CCT: Warm White (3000K); Cool White (4000K); Daylight (6000K)

Warranty: 3 years
Beam Angle(°): Symmetry (L60 x 60 / L100 x 100) / Asymmetry (L100 x 60)


Efficacy (lm/W): >100
CRI (Ra): >70

Power Factor: >0.9
IP Rating: IP 65



Mounting Type: Surface

Classification: Class I



MODEL	OS FL-2 (Alu)	OS FL-3 (Alu)	OS FL-4 (Alu)
DIMENSION (mm)	(L)325	(L)400	(L)475
WATTAGE	75w / 100w	112w / 150w	146w / 200w
LUMEN	9000lm / 11600lm	13500w / 17400lm	18000lm / 23200lm

OUTDOOR

ADJUSTABLE LED LAWN SPOTLIGHT - OS SL

- Features:**
- Rim & Housing is Die Casted From Aluminium Alloy
 - Electrostatically Polyester Powder Coated
 - Tempered Glass Clear Diffuser / Dot Frosted Diffuser
 - Ceramic Lampholder of **GU10**
 - Nylon Connecting Devices


Lamp Specification:

- Brand:** YLI
Lifetime: 30,000 hrs
- CCT:**
Warm White (2700K & 3000K);
Cool White (4000K);
Daylight (6500K)
- Warranty:** 1 year
Beam Angle (°): > 24°/40°
- Efficacy (lm/W):** >100
CRi(Ra): >80
- Power Factor:** >0.5
IP Rating: IP 65



Mounting Type:
Surface Ground

Classification:
Class I

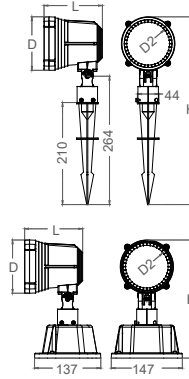

MODEL	OS SL-1101	OS SL-1102	OS SL-1103	OS SL-1104
DIMENSION (mm)	(D)110 x (L)120 x (H)386	(D)110 x (L)158 x (H)386	(D)110 x (L)120 x (H)245	(D)110 x (L)158 x (H)245
WATTAGE	5w / 7.5w	5w / 7.5w	8w	8w
LUMEN	380lm / 600lm	380lm / 600lm	900lm	900lm

ADJUSTABLE LED LAWN SPOTLIGHT - OS SL SERIES

- Features:**
- Rim & Housing is Die Cast From Aluminium Alloy
 - Electrostatically Polyester Powder Coated
 - Anodized Aluminium Reflector (**Optional**)
 - Tempered Glass Clear Diffuser / Dot Frosted Diffuser


Lamp Specification:

- Brand:** YLI / TRIDONIC
Lifetime: 50,000 hrs
- CCT:**
Warm White (3000K);
Cool White (4000K);
Daylight (5700K)
- Warranty:** 1 year
Beam Angle (°): > 20° / 30° / 45° / 60°
- Efficacy (lm/W):** >100
CRi(Ra): >80
- Power Factor:** >0.9
IP Rating: IP 65



Mounting Type:
Surface Ground

Classification:
Class I

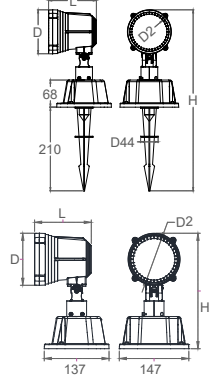

MODEL	OS SL-1355	OS SL-1356
DIMENSION (mm)	(D)135 x (L)178 x (H)270	(D)135 x (L)178 x (H)480
WATTAGE	30w	30w
LUMEN	3600lm	3600lm

LED UP-DOWN LIGHTS - OS & UDL SERIES

- Features:**
- Body is Extruded From Aluminium
 - Head is Die Casted From Aluminium Alloy
 - Side Mounting Kit of Die Cast Aluminium Alloy
 - Tempered Glass Clear Diffuser
 - Nylon Connecting Devices


Lamp Specification:

- Brand:** YLI / TRIDONIC
Lifetime: 50,000hrs
- CCT:**
Warm White (3000K);
Cool White (4000K);
Daylight (5700K)
- Warranty:** 1 year
Beam Angle (°): >20° / 30° / 45° / 60°
- Efficacy (lm/W):** >60
CRi (Ra): >80
- Power Factor:** >0.5
IP Rating: IP 65



Mounting Type:
Surface Wall

Classification:
Class I

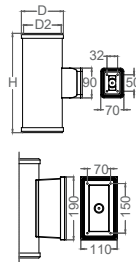

MODEL	OS UDL-90-300-2H	OS UDL-120-300-2H	OS UDL-160-370-2H	OS UDL-160-SQ-350-2H
DIMENSION (mm)	(D)97 x (H)300	(D)127 x (H)300	(D)167 x (H)370	(D)167 x (H)350
WATTAGE	2 x 5w	2 x 9w	2 x 27w	2 x 27w
LUMEN	760lm	1460lm	6400lm	6400lm

MODEL	OS UDL-90-170-1H	OS UDL-160-260-1H	OS UDL-160-SQ-220-1H
DIMENSION (mm)	(D)97 x (H)170	(D)167 x (H)260	(D)160 x (H)220
WATTAGE	1 x 5w	27w	27w
LUMEN	380lm	3200lm	3200lm

LED BOLLARD - OS BOL SERIES

- Features:**
- Body is Extruded From Aluminium
 - Electrostatically Polyester Powder Coated
 - Head is Die Cast From Aluminium Alloy
 - Nylon Connecting Devices
 - E27 Ceramic Lampholder


Lamp Specification:

- Brand:** TOSHIBA
Lifetime: 15,000 hrs
- CCT:**
Warm White (3000K);
Cool White (4000K);
Daylight (6500K)
- Warranty:** 1 year
Beam Angle (°): >200°
- Efficacy (lm/W):** >100
CRi (Ra): >80
- Power Factor:** >0.5
IP Rating: IP 65



Mounting Type:
Surface Ground

Classification:
Class I

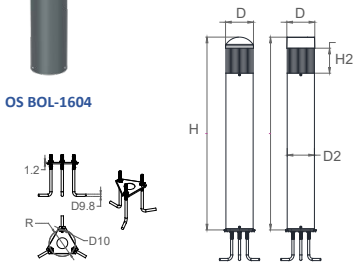

MODEL	OS BOL-1201	OS BOL-1202	OS BOL-1603	OS BOL-1604
HEAD SHAPE	ROUND TOP	FLAT TOP	ROUND TOP	FLAT TOP
DIMENSION (mm)	(D)123 x (H)850	(D)123 x (H)850	(D)167 x (H)1000	(D)167 x (H)1000
WATTAGE	12w	12w	12w	12w
LUMEN	970lm	970lm	970lm	970lm

OUTDOOR

LED GARDEN LIGHTS - OS AL SERIES

Features:

- Die Cast Aluminium Base
- Electrostatically Polyester Powder Coated
- Aluminium Top Plate & Inner Reflector
- Sealed With Silicone Gasket
- Nylon Connecting Device

Lamp Specification:

Brand: YLI
Lifetime: 50,000 hrs
CCT: Warm White (3000K); Daylight (6000K)
Driver: SOSEN

Warranty: 2 years
Beam Angle (°): >60°

Efficacy (lm/W): >60
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 65

Mounting Type:

Pole Mounted

Classification:

Class I



MODEL	OS AL-101	OS AL-104
DIMENSION (mm)	As Shown	As Shown
WATTAGE	50w / 100w	50w / 100w
LUMEN	3000lm / 6000lm	3000lm / 6000lm

LED GARDEN LIGHTS - OS AL SERIES

Features:

- Die Cast Aluminium Base
- Electrostatically Polyester Powder Coated
- Aluminium Top Plate & Inner Reflector
- Sealed With Silicone Gasket
- Nylon Connecting Device

Lamp Specification:

Brand: YLI / SOSEN
Lifetime: 50,000 hrs
CCT: Cool White (4000K); Daylight (6000K)
Driver: SOSEN

Warranty: 2 years
Beam Angle°: >60°

Efficacy (lm/W): >60
CRI(Ra): >80

Power Factor: >0.9
IP Rating: IP 65

Mounting Type:

Pole Mounted

Classification:

Class I



OS111 COB LED Module

MODEL	OS AL-430-LED	OS AL-430-CN111
DIMENSION (mm)	As Shown	As Shown
WATTAGE	50w / 100w	60w / 80w
LUMEN	3000lm / 6000lm	4800lm / 7400lm

OUTDOOR

OASIS SL SERIES - LED STREET LIGHTS

Features:

- Die Cast Aluminium & Aluminium Extruded Housing
- Electrostatic Polyester Powder Coated
- Built-In Gear Chamber
- Sealed With Silicone Gasket
- Nylon Connecting Device

Lamp Specification:

Brand: OSRAM / SOSEN
LifeTime: 50,000 hrs
CCT: Warm White (3000K); Cool White (4000K); Daylight (6000K)
Driver: SOSEN

Warranty: 3 years
Beam Angle(°): >60°/100°

Efficacy (lm/W): >100
CRI (Ra): >70

Power Factor: >0.9
IP Rating: IP 65

Optional Add-On :

20kV surge protect are available on request

Mounting Type:

Mild Steel Pole With Gold Rim

Classification:


Class I




OS SL-2/O




OS SL-3/O




OS SL-4/O

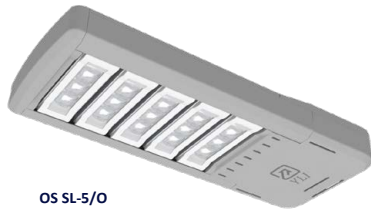

OS SL-5/O




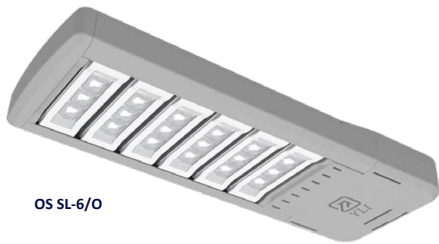


OS SL-6/O

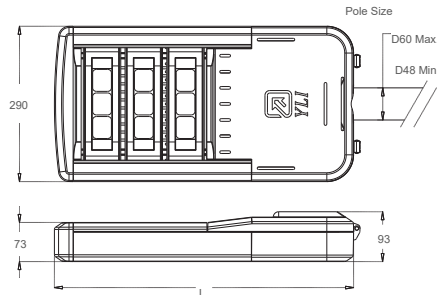

MODEL	OS SL-2/O	OS SL-3/O	OS SL-4/O	OS SL-5/O	OS SL-6/O
DIMENSION (mm)	(L)481	(L)559	(L)637	(L)715	(L)793
WATTAGE	72w / 100w	108w / 150w	144w / 200w	180w / 250w	216w / 300w
LUMEN	9000lm / 11600lm	13500lm / 17400lm	18000lm / 23200lm	22500lm / 29000lm	27000lm / 34800lm

HOT-DIP GALVANIZED POLE C/W ARM FOR OS SL STREET LIGHTS

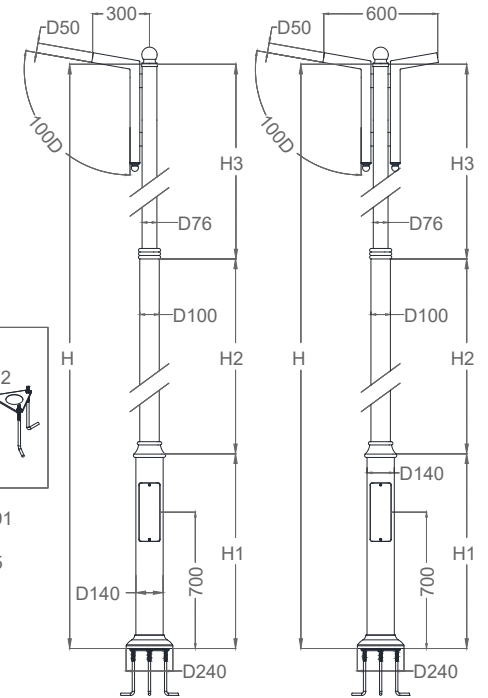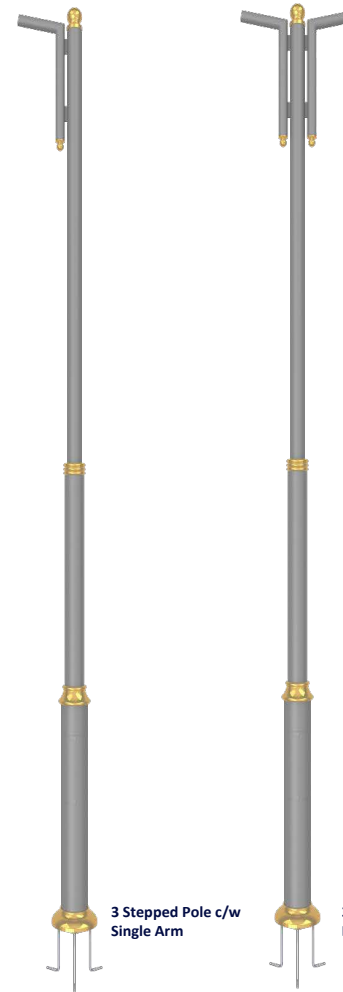

MODEL	HDG-POLE-40-3SA		HDG-POLE-50-3SA		HDG-POLE-60-3SA	
MATERIAL	POLE	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized
	GOLD RIM	ADC	ADC	ADC	ADC	ADC
ARM TYPE		Single Arm	Single Arm	Single Arm	Single Arm	Single Arm
DIMENSION (mm)		(H)4000 x (H1)1000 x (H2)1000 x (H3)2000	(H)5000 x (H1)1000 x (H2)2000 x (H3)2000	(H)6000 x (H1)1000 x (H2)2000 x (H3)3000	(H)6000 x (H1)1000 x (H2)2000 x (H3)3000	(H)6000 x (H1)1000 x (H2)2000 x (H3)3000
MODEL	HDG-POLE-40-3DA		HDG-POLE-50-3DA		HDG-POLE-60-3DA	
MATERIAL	POLE	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized	Mild Steel + Hot-Dip Galvanized
	GOLD RIM	ADC	ADC	ADC	ADC	ADC
ARM TYPE		Double Arm	Double Arm	Double Arm	Double Arm	Double Arm
DIMENSION (mm)		(TH)4000 x (H)1000 x (H2)1000 x (H3)2000	(TH)5000 x (H)1000 x (H2)2000 x (H3)2000	(TH)6000 x (H)1000 x (H2)2000 x (H3)3000	(TH)6000 x (H)1000 x (H2)2000 x (H3)3000	(TH)6000 x (H)1000 x (H2)2000 x (H3)3000

EMERGENCY LIGHT

vitalite®



LED EMERGENCY LIGHT - RECESSED TYPE

- Features:**
- Polycarbonate Housing
 - Stainless Steel Clip


Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours
Mode of Operation: Non-Maintained
Warranty: 1 year
Rating: 0.01A / 1.0W / 0.66PF
Recharge Period: 15 Hours
Battery: Ni-Cd AA 2.4V 1800mAh
IP Rating: IP 20 (Lamp Fitting) / IP 44 (LED Module)
Mains Supply: 220 – 240V 50/60Hz
Max. Operation Temperature: 40°C



Mounting Type:
Recessed Plaster Ceiling

Classification:
Class II

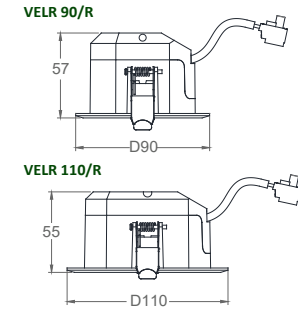

MODEL	VELR 90/R	VELR 110/R
DIMENSION (mm)	(D)90 x (H)57	(D)110 x (H)55
LAMP	LED 5050 (1 PC)	LED 5050 (1 PC)
RATED LUMEN	115lm	115lm

LED EMERGENCY LIGHT - ROUND SURFACE TYPE


- Features:**
- Metal Rim (White Texture)
 - Polycarbonate Housing
 - Mild Steel Mounting Bracket
 - Stainless Steel Spring Clips
 - Polycarbonate Opal Diffuser

Lamp Specification:
Brand: VITALITE
Emergency Duration: 3 Hours
Mode of Operation: Non-Maintained
Warranty: 1 year
Rating: 0.001A / 2.0W / 0.93PF
Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 1800mAh
IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz
Max. Operation Temperature: 35°C



Mounting Type:
Surface Ceiling

Classification:
Class I

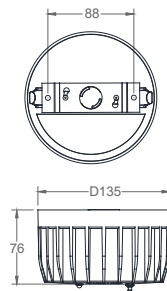

LED EMERGENCY LIGHT - ROUND SURFACE TYPE


- Features:**
- PC or Aluminium Surface Housing
 - Mild Steel Mounting Base
 - Polycarbonate Clear Diffuser
 - Stainless Steel Spring Clips

Lamp Specification:
Brand: VITALITE
Emergency Duration: 3 Hours
Mode Of Operation: Non-Maintained
Warranty: 1 year
Rating: 0.01A / 1.0W / 0.66PF
Recharge Period: 15 Hours
Battery: Ni-Cd AA 2.4V 1800mAh
IP Rating: IP 20 (Lamp Fitting) / IP 44 (LED Module)
Max. Operation Temperature: 40°C



Mounting Type:
Surface Ceiling

Classification:
Class II

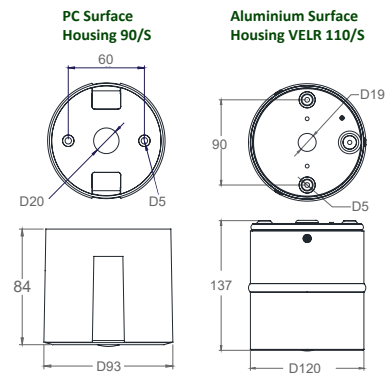

MODEL	VELR 90/S	VELR 110/S
DIMENSION (mm)	(D)93 x (H)84	(D)120 x (H)137
LAMP	LED 5050 (1 PC)	LED 5050 (1 PC)
RATED LUMEN	115lm	115lm

MODEL	VELR 135/S
DIMENSION (mm)	(D)135 x (H)76
LAMP	LED 3535 (1 PC)
RATED LUMEN	115lm

KELUAR SIGN

LED KELUAR SIGN - SURFACE BOX TYPE

Features:

- Mild Steel Housing
- Opal Diffuser With KELUAR Sign

Mounting Type:

- Wall Mounted
(Above Doors / Entrance / Exits)

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Maintained

Warranty: 1 year
Rating: 0.01A / 2.5W / 0.90PF


Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 40°C

Classification:

Class I




VKS 560/B/R/M

VKS 560/B/L

VKS 560/B/S

VKS 560/B/R



MODEL	VKS 560/B/**
DIMENSION (mm)	(L)560 x (H)160 x (W)56
LAMP	LED 2835 (5 PCS)

LED EMERGENCY LIGHT - SEMI-RECESSED SLIM TYPE

Features:

- Aluminium Extruded Housing
- Mild Steel Mounting Base
- Polycarbonate Diffuser Panel With KELUAR Sign

Mounting Type:

- Semi-Recessed Plaster Ceiling
(Hole Cut L570mm x W60mm)

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Non-Maintained

Warranty: 1 year
Rating: 0.01A / 2.7W / 0.85PF


Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 40°C

Classification:

Class I

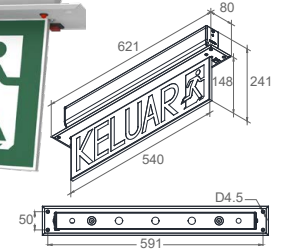

VKS 555/STSR/RM
(Single Sided View)

VKS 555/STSR/LRA
(Double Sided View)

VKS 555/STSR/SA
(Single Sided View)

VKS 555/STSR/SA
(Single Sided View)



MODEL	VKS 555/STSR/**
DIMENSION (mm)	(L)621 x (H)241 x (W)80
LAMP	LED 2835 (28 PCS)

LED KELUAR SIGN - SURFACE SLIM TYPE

Features:

- Aluminium Extruded Housing
- Mild Steel Mounting Base
- Polycarbonate Diffuser Panel With KELUAR Sign

Mounting Type:

- Surface Ceiling Mounted
(Above Exit Door)

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Maintained

Warranty: 1 year
Rating: 0.01A / 2.7W / 0.85PF


Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 40°C

Classification:

Class I

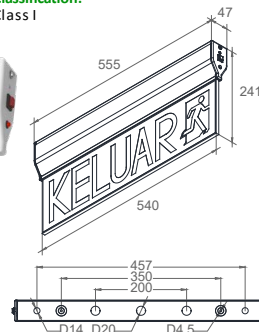

VKS 555/STS/RM
(Single Sided View)

VKS 555/STS/LRA
(Double Sided View)

VKS 555/STS/SA
(Single Sided View)

VKS 555/STS/SA
(Single Sided View)



MODEL	VKS 555/STS/**
DIMENSION (mm)	(L)555 x (H)241 x (W)47
LAMP	LED 2835 (28 PCS)

LED KELUAR SIGN - WEATHERPROOF (IP65)

Features:

- Polycarbonate Housing & Diffuser

Mounting Type:

- Wall Mounted
(Above Doors / Entrance / Exits)

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Maintained

Warranty: 1 year
Rating: 0.01A / 2.5W / 0.90PF


Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 65
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 40°C

Classification:

Class II

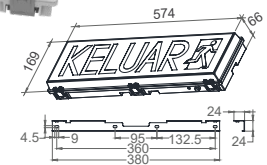

VKS 570/WP/RM

VKS 570/WP/L

VKS 570/WP/S

VKS 570/WP/R



MODEL	VKS 570/WP/**
DIMENSION (mm)	(L)574 x (H)66 x (W)169
LAMP	LED 2835 (5 PCS)

EMERGENCY LIGHT AND LED DRIVER

LED EMERGENCY LIGHT - RECESSED TYPE

Features:

- Mild Steel Housing
- Prismatic Diffuser
- Stainless Steel Spring Clips

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Non-Maintained

Warranty: 1 year
Rating: 0.005A / 1.2W / 0.91PF


Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh

IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 35°C



Mounting Type: Recessed Plaster Ceiling (Hole Cut L350mm x W125mm)

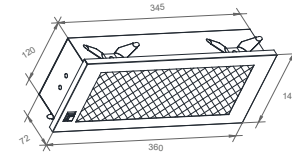

MODEL	VEL 360/RT
DIMENSION (mm)	(L)360 x (H)72 x (W)145
LAMP	LED 2835 (20PCS)
RATED LUMEN	75lm

LED EMERGENCY LIGHT - SURFACE TYPE VEL 330/ST

Features:

- Mild Steel Housing
- Polycarbonate Opal Linear Diffuser

Lamp Specification:

Brand: VITALITE
Emergency Duration: 3 Hours

Mode of Operation: Non-Maintained

Warranty: 1 year
Rating: 0.005A / 1.2W / 0.91PF

Recharge Period: 24 Hours
Battery: Ni-Cd AA 3.6V 900mAh


IP Rating: IP 20
Mains Supply: 220 – 240V 50/60Hz

Max. Operation Temperature: 35°C



Mounting Type: Surface Ceiling / Wall

Classification: Class I

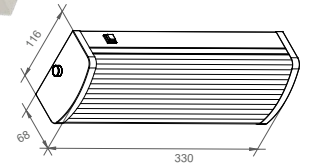

MODEL	VEL 330/ST
DIMENSION (mm)	(L)330 x (H)68 x (W)116
LAMP	LED 2835 (20PCS)
RATED LUMEN	75lm

LED DRIVER (CONSTANT CURRENT) - VLD SERIES

Features:

- Polycarbonate Casing
- 2 Core x 0.75mm² PVC Cable Include For Incoming Supply

Specification:

Warranty: 2 year
Lifetime: 30,000 Hours


Efficacy (lm/W): >82
Mains Supply: 220 – 240V 50/60Hz

Power Factor: >0.5 / 0.9


IP Rating: IP 20

Terminal Block: Screw Type (Terminal for leads: 0.5mm² - 1.0mm²)

Max. Operation Temperature: 40°C / 75°C

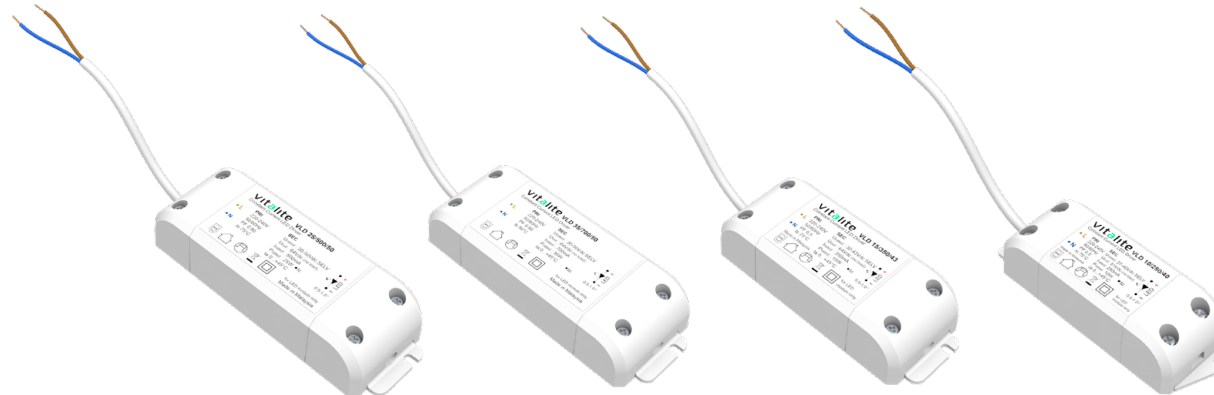


Classification: Class II

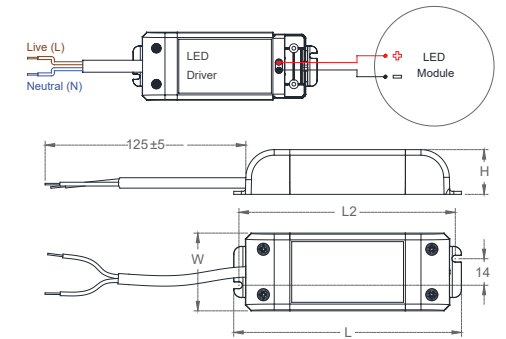


MODEL	VLD 10/250/40	VLD 15/350/43	VLD 25/500/50	VLD 35/700/50
DIMENSION (mm)	(L1)96 x (L2)89 x (W)33 x (H)22	(L1)109 x (L2)103 x (W)41 x (H)24	(L1)120 x (L2)115 x (W)41 x (H)24	(L1)123 x (L2)118 x (W)46 x (H)23
OUTPUT CURRENT	250mA	350mA	500mA	700mA
OUTPUT POWER	5 - 10W	7 - 15W	15 - 25W	20 - 35W
FORWARD VOLTAGE	20 - 40V	20 - 43V	30 - 50V	30 - 50V
THD	<150%	<150%	<15%	<15%

Ready to switch on a new era of lighting?
 Say goodbye to mundane on-off switches and hello to brilliance.
 Discover the magic of smart lighting with us today!


DALI CONTROL SYSTEM

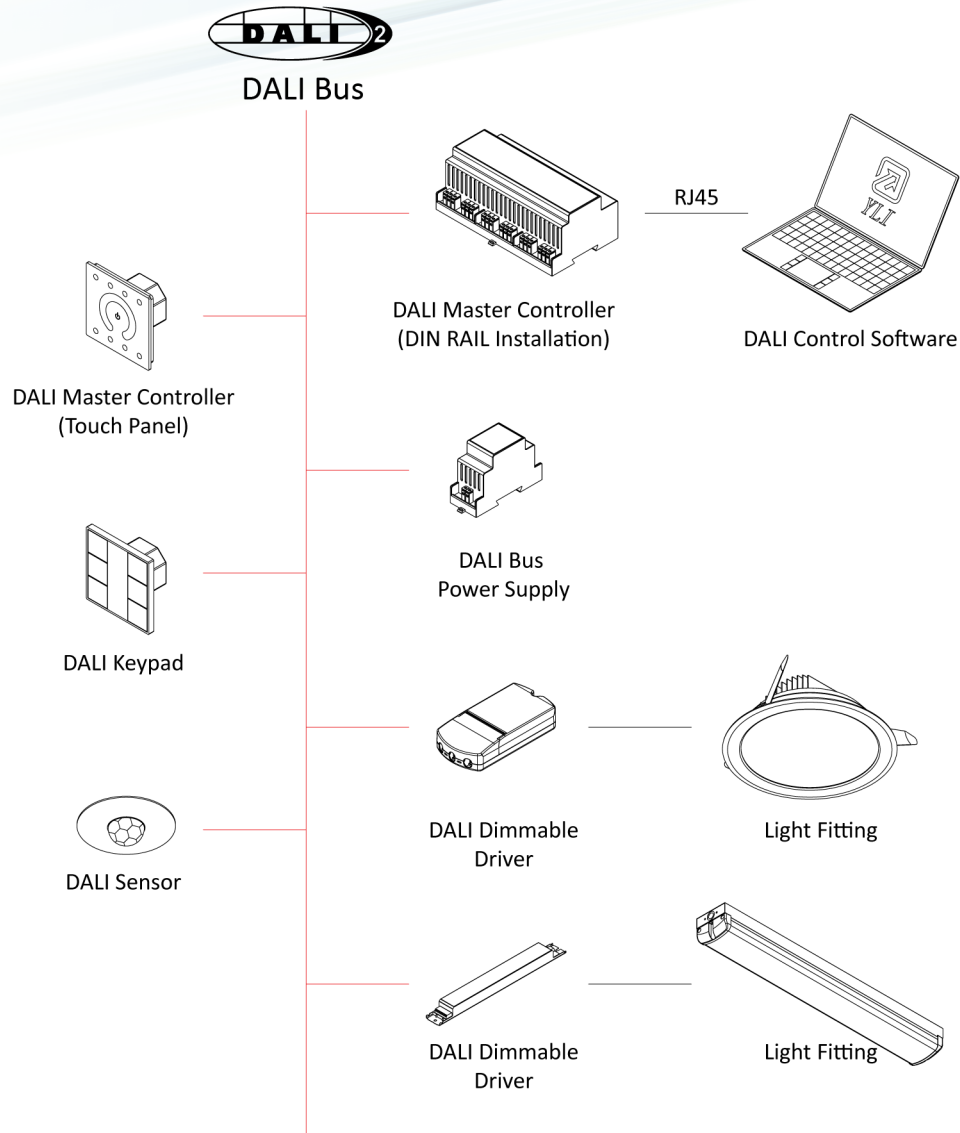


PHASE-CUT DIMMABLE DIAGRAM

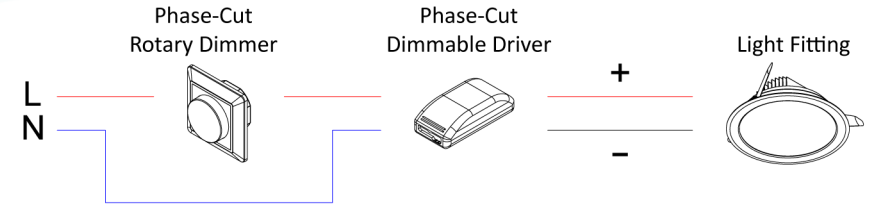

0/ 1-10V DIMMABLE DIAGRAM

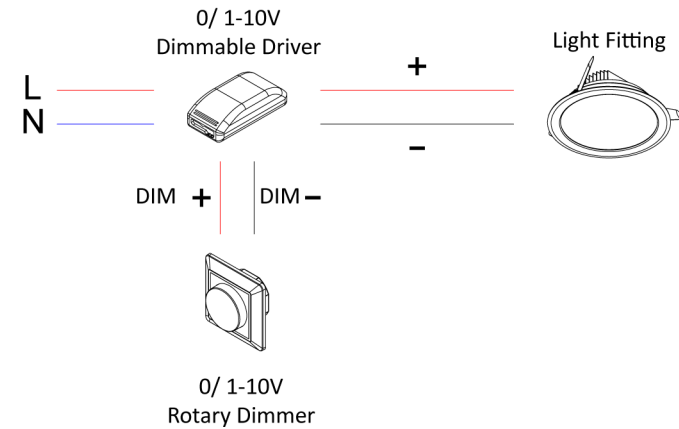

WIRELESS DIMMABLE DIAGRAM

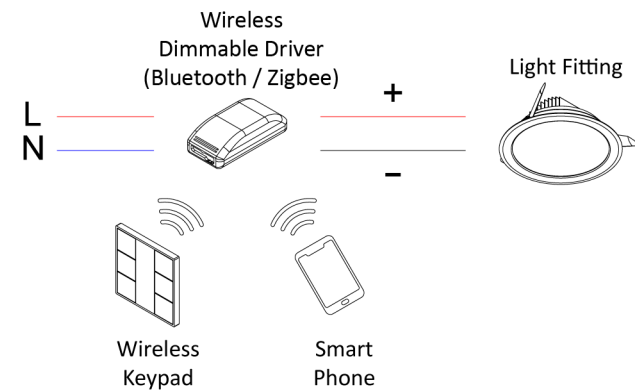



YLI

Ultimate Lighting Experience

ISO 9001:2015

CORPORATE HEAD OFFICE & MANUFACTURE BASE

YLI INDUSTRY SDN. BHD. (504654-U)

PT 14503 & 14504, PERSIARAN BATU GAJAH PERDANA
6, TAMAN BATU GAJAH PERDANA, 31550 PUSING, IPOH,
PERAK, MALAYSIA.

TEL: +60-5-366 5227 (Hunting Line), 366 4227, 366 8227, 366 9227

FAX: +60-5-365 1227, 366 1227

Email: info@yli-ind.com.my

Website: www.yli-ind.com.my

Digital Version

